

A32L480-TRI-SYS COMPONENTS

A3859000

DESCRIPTION

2Look4Light Imagine - Support Cable

GENERAL

Series: 2Look4 160

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 40

Length (in): 1 <sup>6</sup>/<sub>10</sub>

Width (mm): 20

Width (in): 8/10

Height (mm): 2000

Height (in): 78 <sup>3</sup>/<sub>4</sub>

Weight (kg): 0.167

Weight (lbs): 0.368

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

A32L480-TRI-SYS COMPONENTS

A3859400

DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 3 Wire

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 54  
Length (in): 2 1/4  
Width (mm): 28  
Width (in): 1 1/8  
Height (mm): 22  
Height (in): 9/10  
Weight (kg): 0.01  
Weight (lbs): 0.022  
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3859500

DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 5 Wire

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 54  
Length (in): 2 1/4  
Width (mm): 28  
Width (in): 1 1/8  
Height (mm): 22  
Height (in): 9/10  
Weight (kg): 0.01  
Weight (lbs): 3/8  
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3859600

DESCRIPTION

2Look4Light Imagine - Plug Connectors - 3 Wire

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 38  
Length (in): 1 ½  
Width (mm): 28  
Width (in): 1 ⅞  
Height (mm): 13  
Height (in): 1/2  
Weight (kg): 0.01  
Weight (lbs): 0.022  
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3859700

DESCRIPTION

2Look4Light Systems - Plug Connectors - 5 Wire

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 38  
Length (in): 1 ½  
Width (mm): 24  
Width (in): 15/16  
Height (mm): 14  
Height (in): 9/16  
Weight (kg): 0.01  
Weight (lbs): 0.022  
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3859800

DESCRIPTION
2Look4 Systems - Plug Connector 5x1.0 - 1000m

GENERAL
Series: 2Look4 80
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 1000
Length (in): 39 <sup>3</sup> / <sub>8</sub>
Width (mm): 28
Width (in): 1 <sup>1</sup> / <sub>8</sub>
Height (mm): 22
Height (in): 7/8
Weight (kg): 0.27
Weight (lbs): 0.60
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3859900

DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 2000mm

GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 2000

Length (in): 78 ¾

Width (mm): 28

Width (in): 1 ⅞

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

A32L480-TRI-SYS COMPONENTS

A3860000

DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 3000mm

GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 3000

Length (in): 118 1/8

Width (mm): 28

Width (in): 1 1/8

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3860100

DESCRIPTION
2Look4 Systems - Plug Connector 3X0.75 - 1000mm Cable

GENERAL
Series: 2Look4 80
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 1000
Length (in): 39 <sup>3</sup> / <sub>8</sub>
Width (mm): 28
Width (in): 1 <sup>1</sup> / <sub>8</sub>
Height (mm): 22
Height (in): 7/8
Weight (kg): 0.191
Weight (lbs): 0.42
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3860200

DESCRIPTION
2Look4 Systems - Plug Connector 3x0.75 - 2000mm

GENERAL
Series: 2Look4 80
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 28
Width (in): 1 ⅞
Height (mm): 22
Height (in): 7/8
Weight (kg): 0.191
Weight (lbs): 0.42
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3860300

DESCRIPTION

2Look4 Systems - Plug Connector 3x0.75 - 3000mm

GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 3000

Length (in): 118 1/8

Width (mm): 28

Width (in): 1 1/8

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.091

Weight (lbs): 0.20

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

A32L480-TRI-SYS COMPONENTS

A3860500

DESCRIPTION
2Look4 80 / 130 Systems - 24 Volt Power Feed

GENERAL
Series: 2Look4 80
Brand: Prolicht
Division: Architectural

PHYSICAL
Shape: Rectangle
Length (mm): 450
Length (in): 17 <sup>7</sup> / <sub>10</sub>
Width (mm): 55
Width (in): 2 <sup>2</sup> / <sub>10</sub>
Height (mm): 44
Height (in): 1 <sup>7</sup> / <sub>10</sub>
Weight (kg): 0.583
Weight (lbs): 1.29
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38819-

DESCRIPTION

2Look4 80 Track - Trimless - Start Module - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38820-

DESCRIPTION

2Look4 80 Track - Trimless - Start Module - Black - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38821-

DESCRIPTION

2Look4 80 Track - Trimless - Middle Module - White - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38822-

DESCRIPTION

2Look4 80 Track - Trimless - Middle Module - Black - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE





A32L480-TRI-SYS COMPONENTS TRIMLESS

A38823-

DESCRIPTION

2Look4 80 Track - Trimless - End Module - White - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38824-

DESCRIPTION

2Look4 80 Track - Trimless - End Module - Black - 500mm/19 11/16" / 1000mm/39 3/8" / 1500mm/59 1/16" / 1800mm/70 7/8"

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 500 / 1000 / 1500 / 1800  
Length (in): 19 11/16  
Width (mm): 80  
Width (in): 3 1/8  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS TRIMLESS

A38826-

DESCRIPTION

2Look4 80 Track - Trimless - Corner Coupler 90° - White

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Trimless  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Length (mm): 400  
Length (in): 15 3/4  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 200  
Height (in): 7 7/8  
Ceiling Thickness (mm): 12.5  
Ceiling Thickness (in): 1/2  
Min. Recessing Depth (mm): 200  
Min. Recessing Depth (in): 7 7/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

A32L480-TRI-SYS COMPONENTS

A38827-

DESCRIPTION

2Look4 80 Track - Trimless - Corner Coupler 90° - Black

GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 400

Length (in): 15 3⁄4

Width (mm): 400

Width (in): 15 3⁄4

Height (mm): 200

Height (in): 7 7⁄8

Weight (kg): 6.503

Weight (lbs): 14.34

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

A32L480-TRI-SYS COMPONENTS

A38828

DESCRIPTION

2Look4 80 Track - Trimless - Frame Alignment Kit

GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 272

Length (in): 10 7/10

Width (mm): 19

Width (in): 7/10

Height (mm): 105

Height (in): 4 1/10

Weight (kg): 0.175

Weight (lbs): 0.39

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

A32L480-TRI-SYS COMPONENTS

A38829

DESCRIPTION

2Look4 80 /130 Trimless System - LED (Zhaga Standard) Power Feed

GENERAL

Series: 2Look4 80  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 500  
Length (in): 19 7/10  
Width (mm): 14  
Width (in): 9/16  
Height (mm): 4  
Height (in): 3/16  
Weight (kg): 0.01  
Weight (lbs): 0.22

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A32L480-TRI-SYS COMPONENTS

A3T199-

DESCRIPTION

Imagine - Track Spot for 2L4 80/130 - 27.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 16° / 32°

GENERAL

Series: Imagine  
Subseries: Imagine 75  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 75  
Diameter (in): 2 15/16  
Length (mm): 330  
Length (in): 13  
Height (mm): 125  
Height (in): 4 15/16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.896  
Weight (lbs): 1.975  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 20 - 29 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 27.6  
Total Output Wattage (W): 26.4  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 700

LED

Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 1929 / 2007 / 2127 / 2170  
Nominal Lumen (lm): 2909 / 3028 / 3208 / 3273  
CRI: >90 CRI  
Efficiency (%): 62  
Lamp Life (hrs): 50000  
Upon Request: Special Color Temperature Special Led



OPTICAL

Reflector°: 16 / 32  
Adjustability: Rotational 180°; Tilt 50°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

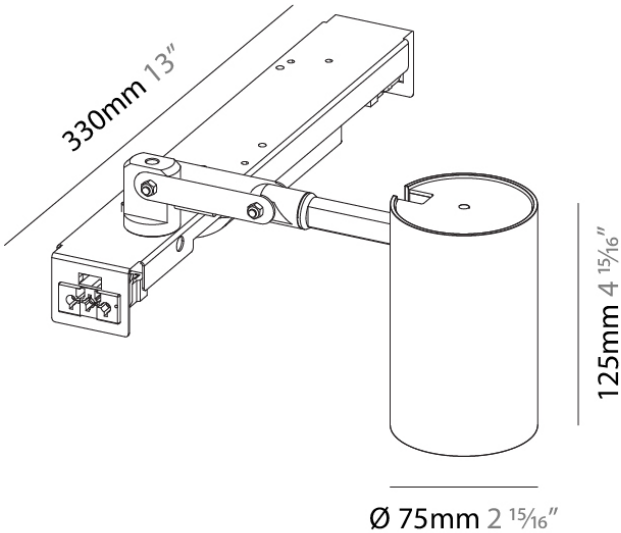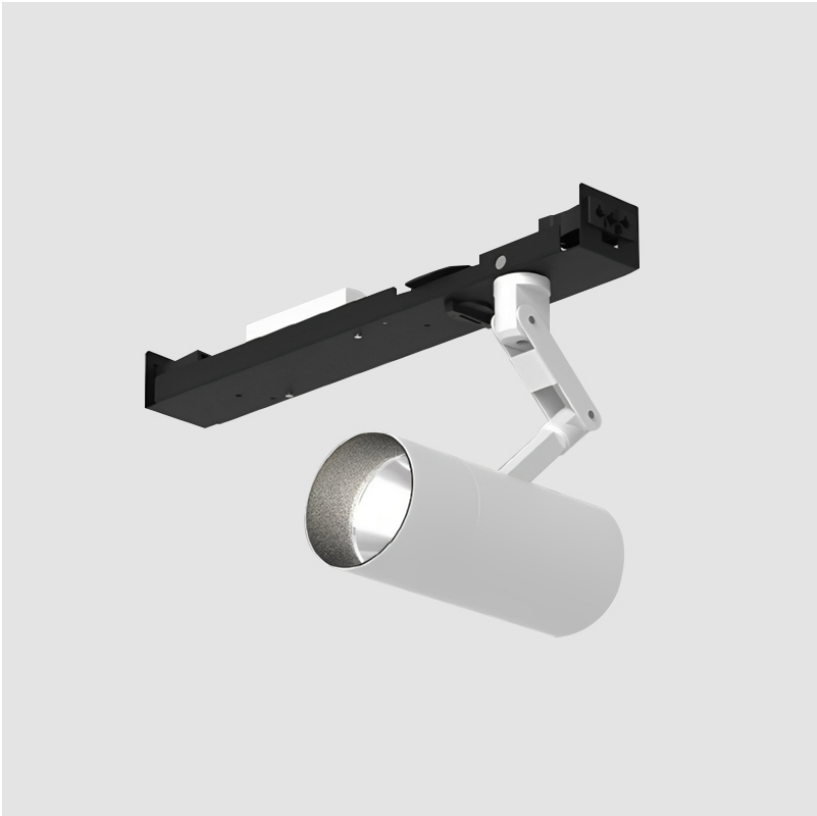

A32L480-TRI-SYS COMPONENTS

A3T200-

DESCRIPTION

Imagine - Track Spot LED (Zhaga Standard) for 2L4 80/130 - 13.7W - 2700K / 3000K / 3500K / 4000K - Reflector 12°

GENERAL

Series: Imagine  
Subseries: Imagine 75  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 75  
Diameter (in): 2 15⁄16  
Length (mm): 330  
Length (in): 13  
Height (mm): 125  
Height (in): 4 15⁄16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.891  
Weight (lbs): 1.96  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 13.7  
Total Output Wattage (W): 12.1  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 1000 - 1999 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 1124 / 1210 / 1258 / 1284  
Nominal Lumen (lm): 1246 / 1342 / 1396 / 1424  
CRI: >90 CRI  
Efficiency (%): 91  
Lamp Life (hrs): 50000  
Upon Request: Special Color Temperature Special Led



OPTICAL

Reflector°: 12  
Adjustability: Rotational 180°; Tilt 50°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

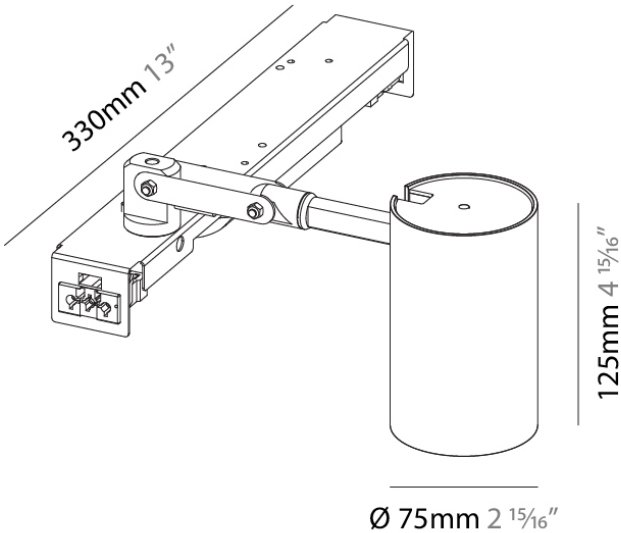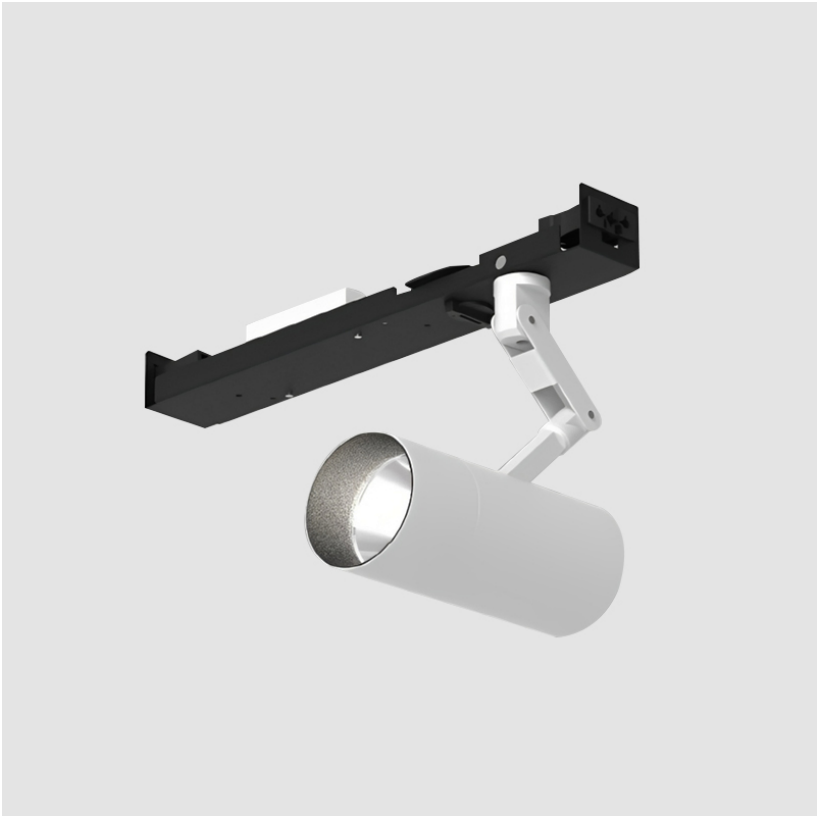



## LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

## IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

## IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)