

A3CLK30-SUS-SYS COMPONENTS

A380052-

DESCRIPTION

Magiq 4 Korona - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector 10° / 20° / 40°

GENERAL

Series: Magiq
Subseries: Magiq 4 Cell
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 167
Length (in): 6 9/16
Width (mm): 30
Width (in): 1 3/16
Height (mm): 55
Height (in): 2 3/16
Light Distribution: Direct
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 16.3
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 1050
Upon Request: 0-10Vdc Dimming / DALI

LED


Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 4
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 780 / 850 / 862 / 880
CRI: >90 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 10 / 20 / 40
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

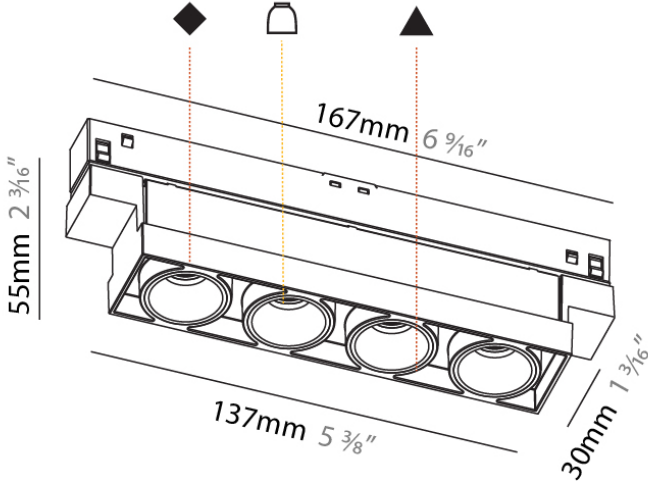

A3CLK30-SUS-SYS COMPONENTS

A380062-

DESCRIPTION

Magiq 4 - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector: 10° / 20° / 40°

GENERAL

Series: Clicktrack
Subseries: Magiq 4 Cell
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 167
Length (in): 6 9/16
Width (mm): 30
Width (in): 1 3/16
Height (mm): 55
Height (in): 2 3/16
Light Distribution: Direct
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 16.3
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 1050
Upon Request: 0-10Vdc Dimming / DALI

LED


Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 780 / 850 / 862 / 880
CRI: >90 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 10 / 20 / 40
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

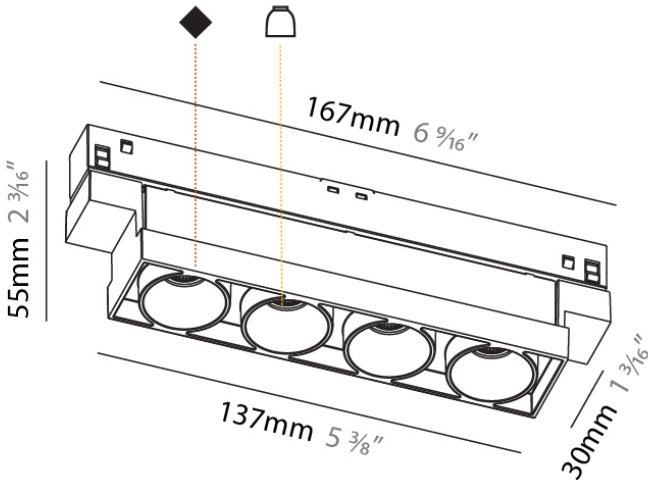

A3CLK30-SUS-SYS COMPONENTS

A380106-

DESCRIPTION

Hangover 75 - Indirect Diffuser

GENERAL

Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Round
Diameter (mm): 70
Diameter (in): 2 3/4
Fixture Finish: RED / ORG / YEL / GRN / BLU
Fixture Material: Acrylic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

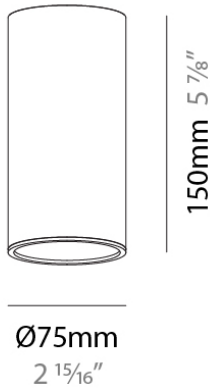

A3CLK30-SUS-SYS COMPONENTS

A38803

DESCRIPTION

Clicktrack - Trimless - 48V Power Feed - Black

GENERAL

Series: Clicktrack
Subseries: Clicktrack 25
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 143
Length (in): 5 10/16
Width (mm): 16
Width (in): 10/16
Height (mm): 18
Height (in): 11/16
Weight (kg): 0.042
Weight (lbs): 0.09
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

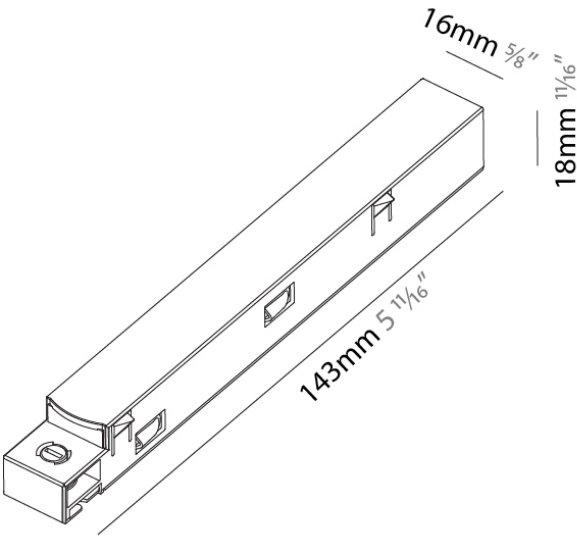

A3CLK30-SUS-SYS COMPONENTS SUSPENSION

A38930-

DESCRIPTION

Clicktrack 30 - Aluminum Profile - 1000 / 2000 / 3000mm

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Profile


PHYSICAL

Shape: Rectangle
Length (mm): 1000 / 2000 / 3000
Length (in): 39 3/8
Width (mm): 30
Width (in): 1 3/16
Height (mm): 64
Height (in): 2 1/2
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

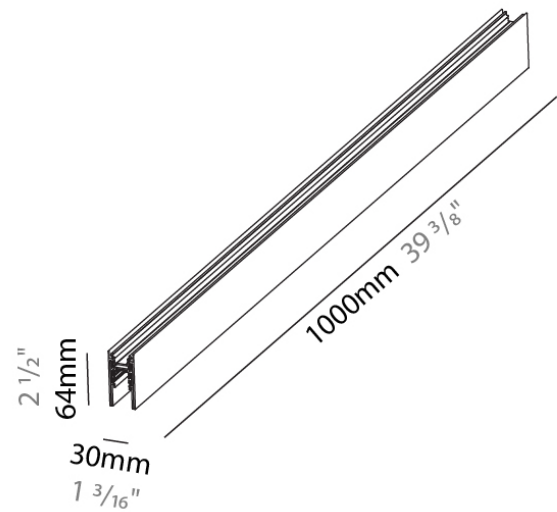

PROJECT
TYPE
NOTES
QUANTITY
DATE

A38931-

DESCRIPTION

Clicktrack 30 - Suspension System - End Cap -

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL



Length (mm): 30
Length (in): 1 3⁄16
Width (mm): 12
Width (in): 1/2
Height (mm): 64
Height (in): 2 1⁄2
Weight (kg): 0.054
Weight (lbs): 1/8

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

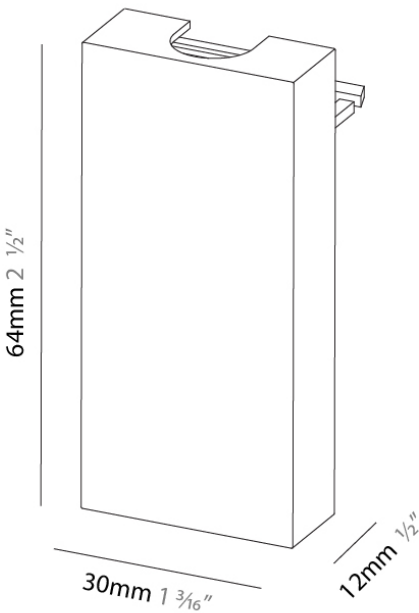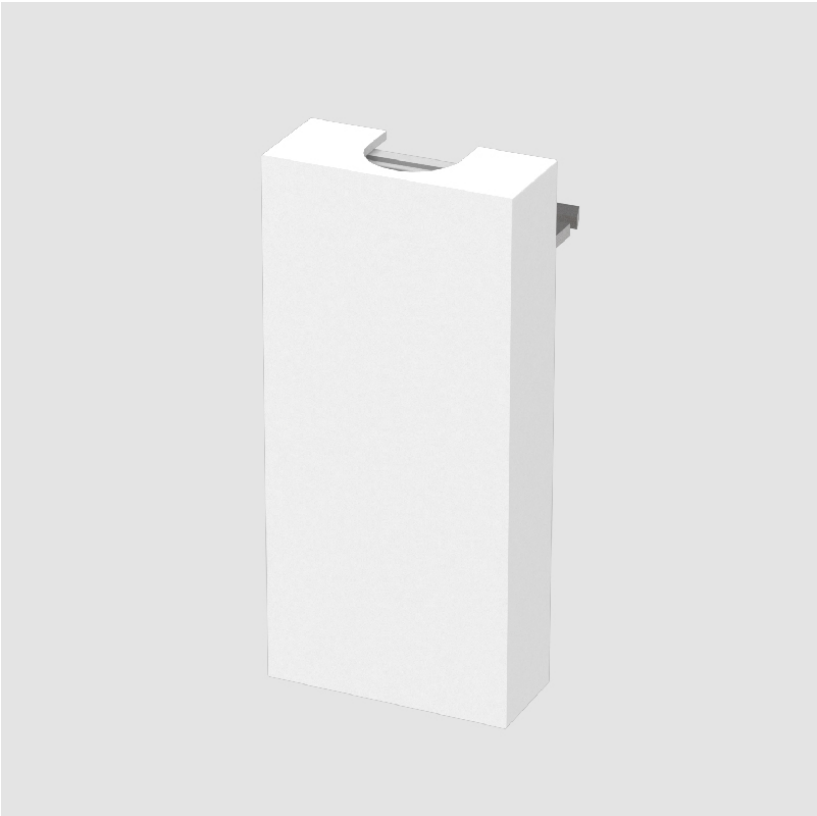

A3CLK30-SUS-SYS COMPONENTS

A38952


DESCRIPTION
Clicktrack - Suspension System - Linear Coupler - Black

GENERAL
Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural

PHYSICAL
Shape: Rectangle
Length (mm): 142
Length (in): 5 9/16
Width (mm): 18
Width (in): 11/16
Height (mm): 19
Height (in): 3/4
Weight (kg): 0.017
Weight (lbs): 1/16
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

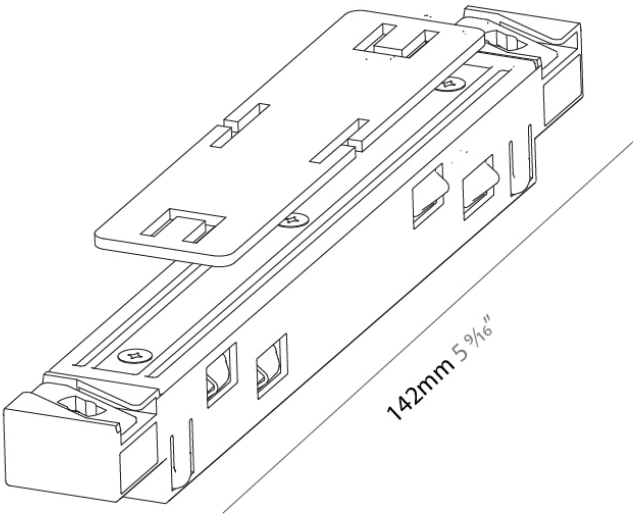

A3CLK30-SUS-SYS COMPONENTS

A38957-

DESCRIPTION

Hypro 30 - Suspension System - Suspension Cable - 2000mm 78 3/4" -

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Round
Length (mm): 26
Length (in): 1
Width (mm): 30
Width (in): 1 3/16
Height (mm): 2000
Height (in): 78 3/4
Weight (kg): 0.029
Weight (lbs): 0.064
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

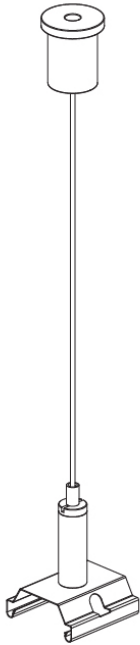

2000 / 6000mm
78 3/4" / 236 1/4"

A3CLK30-SUS-SYS COMPONENTS

A38958-

DESCRIPTION

Clicktrack 30 - Suspension System - Suspension Cable - 6000mm
236 1/4" -

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Round
Length (mm): 26
Length (in): 1
Width (mm): 30
Width (in): 1 3/16
Height (mm): 6000
Height (in): 236 1/4
Weight (kg): 0.029
Weight (lbs): 0.64
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /
ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

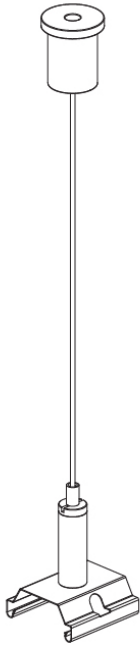

2000 / 6000mm
78 3/4" / 236 1/4"

A3CLK30-SUS-SYS COMPONENTS

A38959-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (Non-Dimming) for Direct Only

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural


PHYSICAL

Length (mm): 528
Length (in): 20 13/16
Width (mm): 64
Width (in): 2 1/2
Height (mm): 30
Height (in): 1 3/16
Weight (kg): 1.247
Weight (lbs): 2.7
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

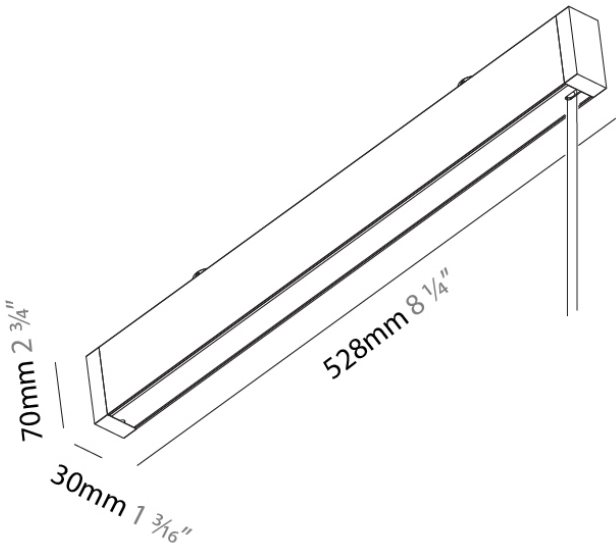

A3CLK30-SUS-SYS COMPONENTS

A38960-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (0-10V Dimming) for Direct Light Only

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural

PHYSICAL

Length (mm): 528
Length (in): 20 13/16
Width (mm): 64
Width (in): 2 1/2
Height (mm): 30
Height (in): 1 3/16
Weight (kg): 1.247
Weight (lbs): 2.7


ELECTRICAL

Total Output Wattage (W): 100

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

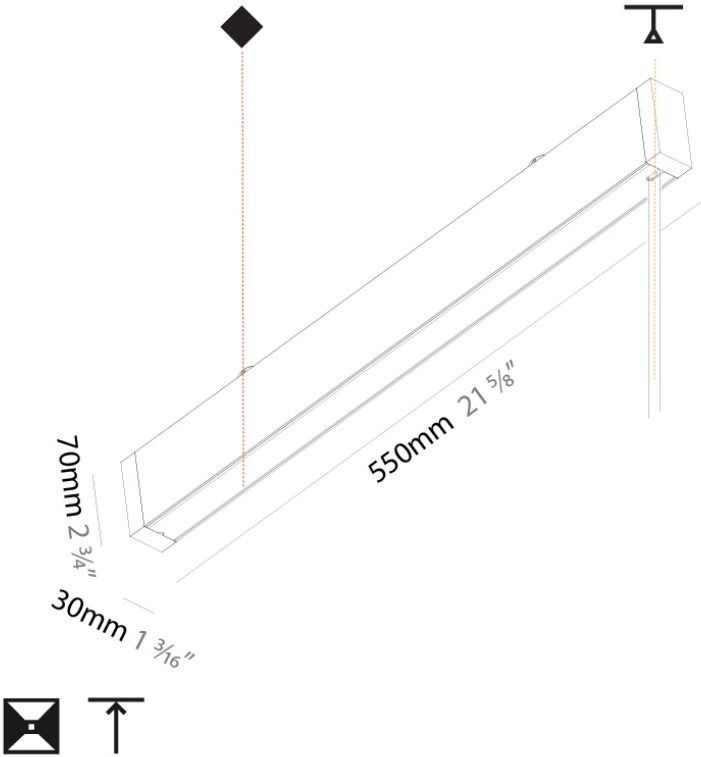

A3CLK30-SUS-SYS COMPONENTS

A3T078-

DESCRIPTION

Centriq - Track Head - 30mm / 1 3/16" - 4.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°

GENERAL

Series: Centriq
Subseries: Centriq 125
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Cylinder
Diameter (mm): 30
Diameter (in): 1 3/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 99
Height (in): 3 7/8
Light Distribution: Adjustable / Direct
Weight (kg): 0.063
Weight (lbs): 0.139
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 4.3
Total Output Wattage (W): 3.9
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 340
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 260 / 270 / 290
Nominal Lumen (lm): 343.9 / 359.9 / 391.8
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32
Adjustability: Rotational 360°; Tilt 90°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

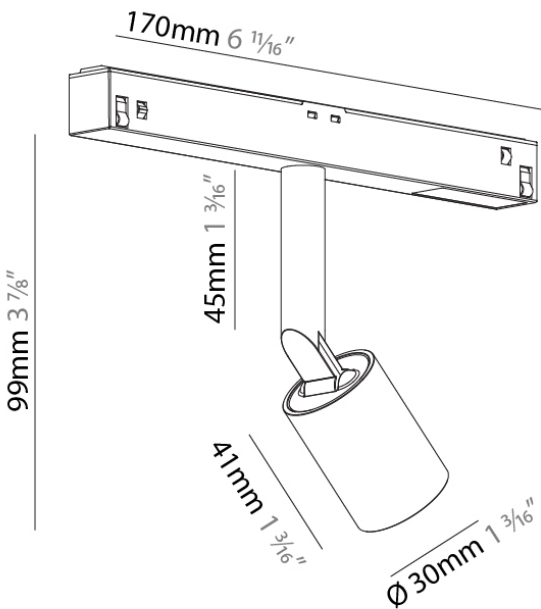

A3CLK30-SUS-SYS COMPONENTS

A3T079-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.31W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Centriq
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 113
Height (in): 4 7/16
Light Distribution: Adjustable / Direct
Weight (kg): 0.117
Weight (lbs): 0.258
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.31
Total Output Wattage (W): 5.74
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Type: Constant Voltage - 120Vac
Driver Class: Class 2
Input Voltage (V): 48

LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 360 / 390 / 420
Nominal Lumen (lm): 448.1 / 483.1 / 513.9
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Beam Angle: 10
Adjustability: Rotational 360°; Tilt 90°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

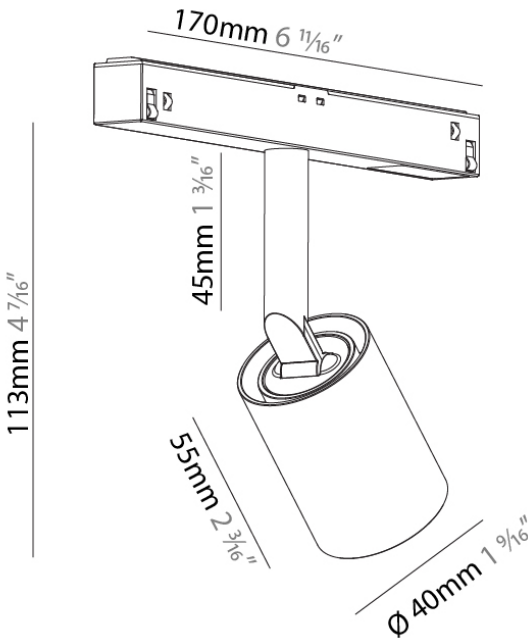

A3CLK30-SUS-SYS COMPONENTS

A3T080-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

GENERAL

Series: Centriq
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 113
Height (in): 4 7/16
Light Distribution: Adjustable / Direct
Weight (kg): 0.144
Weight (lbs): 0.318
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.5
Total Output Wattage (W): 5.9
Driver Included: No

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 468 / 490 / 520
Nominal Lumen (lm): 732 / 769 / 780
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Reflector°: 20 / 40 / 50
Optic°: 31 / 36
Adjustability: Rotational 360°; Tilt 90°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

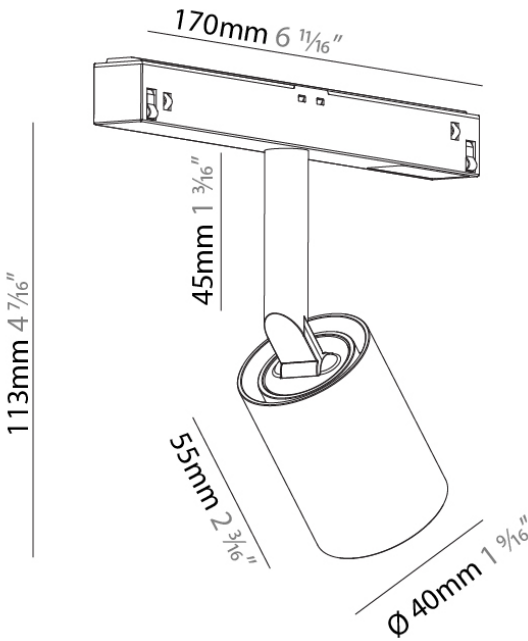

A3CLK30-SUS-SYS COMPONENTS

A3T081-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 9.2W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Cylinder
Diameter (mm): 55
Diameter (in): 2 3/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 137
Height (in): 5 3/8
Light Distribution: Adjustable / Direct
Weight (kg): 0.54
Weight (lbs): 1.19
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 9.2
Total Output Wattage (W): 8.4
Driver Included: No

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 486 / 524 / 548
Nominal Lumen (lm): 625.3 / 660.1 / 712.4
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Reflector°: 9
Adjustability: Rotational 360°; Tilt 90°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

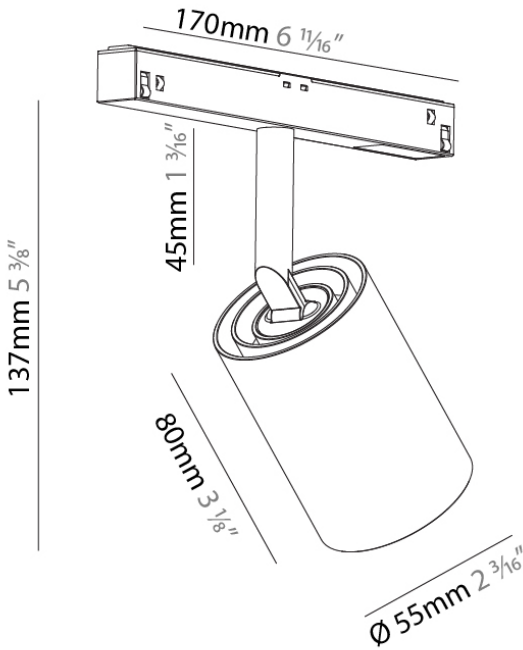

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T082-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

GENERAL

Series: Centriq
Brand: Prolicht
Division: Architectural
Mounting Type: Track

PHYSICAL

Shape: Cylinder
Diameter (mm): 55
Diameter (in): 2 3/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 137
Height (in): 5 3/8
Light Distribution: Adjustable / Direct
Weight (kg): 0.548
Weight (lbs): 1.21
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 11.8
Total Output Wattage (W): 11.2
Dimming: Non-Dimmable
Driver Included: No
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 600
Upon Request: 0-10Vdc dimming

LED


Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 720 / 760 / 820
Nominal Lumen (lm): 1196 / 1257 / 1275
CRI: >90 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 17 / 33 / 46
Optic°: 15 / 25 / 35
Adjustability: Rotational 360°; Tilt 90°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

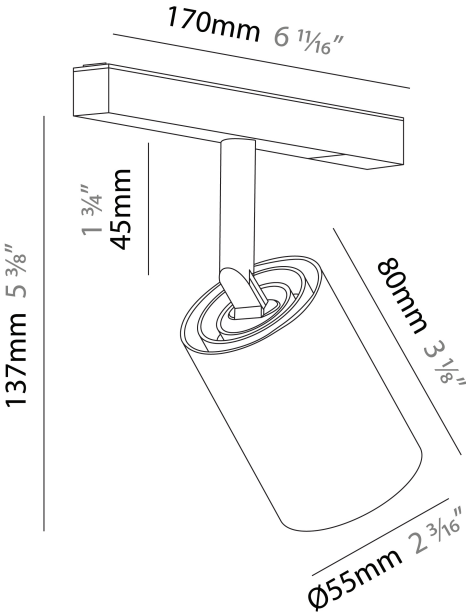

A3CLK30-SUS-SYS COMPONENTS

A3T086-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 620mm/24 7/16" - 6.7W / 8W LED (Zhaga Standard) - 2700K / 000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
Subseries: Ledline
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 620
Length (in): 24 7/16
Width (mm): 23
Width (in): 7/8
Height (mm): 43
Height (in): 1 11/16
Light Distribution: Direct
Weight (kg): 0.405
Weight (lbs): 0.89
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.6 / 7.9
Total Output Wattage (W): 6 / 7.2
Dimming: 0-10V Dimming
Driver Included: No


LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 360 / 540
Nominal Lumen (lm): 600 / 900
CRI: >90 CRI
Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

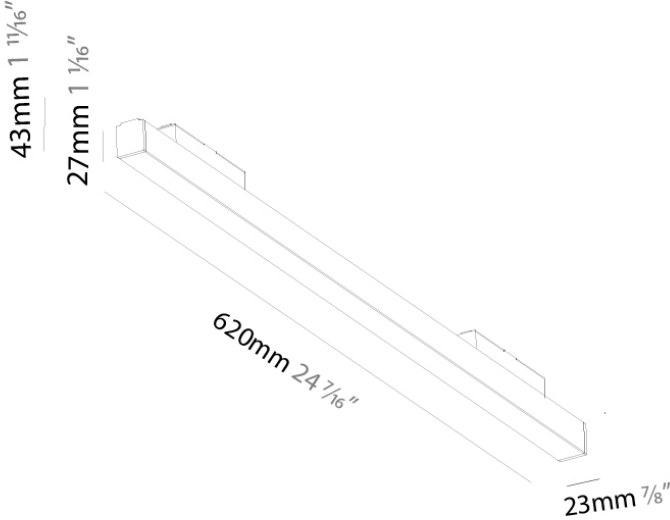

A3CLK30-SUS-SYS COMPONENTS

A3T087-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 820mm / 32 5/16" - 8.9W / 10.7W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
Subseries: Ledline
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 820
Length (in): 32 5/16
Width (mm): 23
Width (in): 7/8
Height (mm): 43
Height (in): 1 11/16
Light Distribution: Direct
Weight (kg): 0.531
Weight (lbs): 1.17
Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 8.8 / 10.6
Total Output Wattage (W): 8 / 9.6
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 480 / 720
Nominal Lumen (lm): 800 / 1200
CRI: >90 CRI
Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

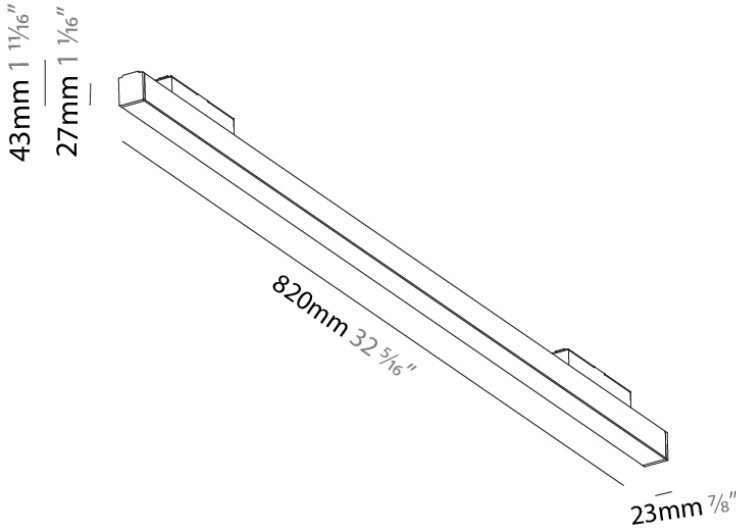

A3CLK30-SUS-SYS COMPONENTS

A3T088-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1020mm / 40 3/16" - 11.1W / 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
Subseries: Ledline
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 1020
Length (in): 40 3/16
Width (mm): 23
Width (in): 7/8
Height (mm): 43
Height (in): 1 11/16
Light Distribution: Direct
Weight (kg): 0.655
Weight (lbs): 1.44
Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
Input Wattage (W): 11.0 / 13.2
Total Output Wattage (W): 10 / 12
Driver Included: No

LED

Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 600 / 900
Nominal Lumen (lm): 1000 / 1500
CRI: >90 CRI
Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

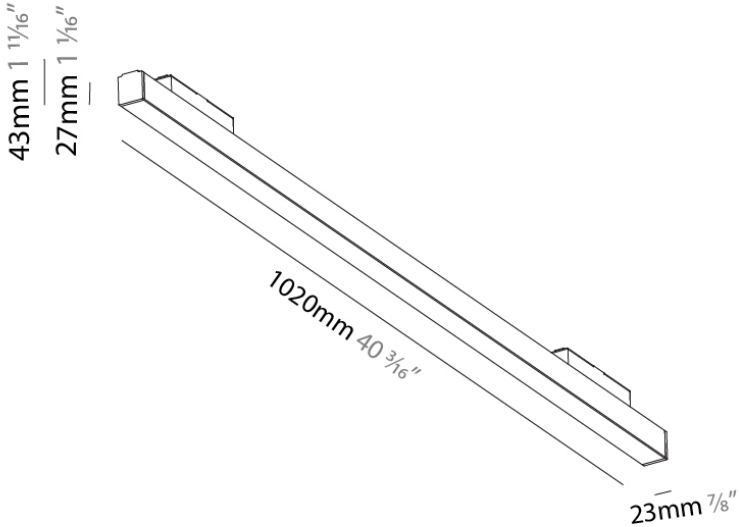

A3CLK30-SUS-SYS COMPONENTS

A3T089-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1220mm / 48 1/16" - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
Subseries: Ledline
Brand: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 1220
Length (in): 48 1/16
Width (mm): 23
Width (in): 7/8
Height (mm): 43
Height (in): 1 11/16
Light Distribution: Direct
Weight (kg): 0.764
Weight (lbs): 1.684
Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 13.2 / 15.8
Total Output Wattage (W): 12 /
Dimming: 0-10V Dimming
Driver Included: No

LED

Delivered Lumen Range: 500 - 1999 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 720 / 1080
Nominal Lumen (lm): 1200
CRI: >90 CRI
Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

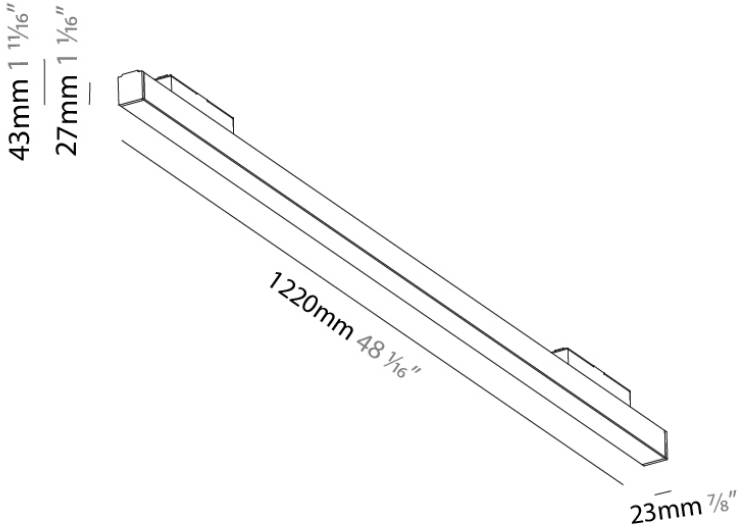

A3CLK30-SUS-SYS COMPONENTS

A3T090-

DESCRIPTION

Snooker - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker
Subseries: Snooker Modular System
Brand: Prolicht
Division: Architectural
Subcategory: Spots

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 2072
Max. Overall Height (in): 81 9/16
Light Distribution: Downlight
Weight (kg): 0.506
Weight (lbs): 1.12
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming


LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 270 / 290 / 304 / 310
Nominal Lumen (lm): 448 / 483 / 504 / 514
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

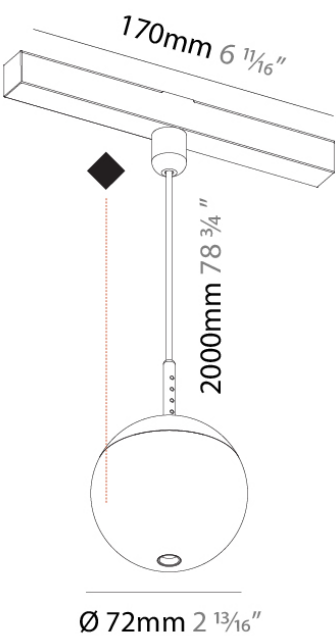

A3CLK30-SUS-SYS COMPONENTS

A3T091-

DESCRIPTION

Snooker Shine - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Diffuser Shine Ring

GENERAL

Series: Snooker
Subseries: Snooker Modular System
Brand: Prolicht
Division: Architectural
Subcategory: Spots

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13/16
Length (mm): 170
Length (in): 6 11/16
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 2072
Max. Overall Height (in): 81 9/16
Light Distribution: Direct
Weight (kg): 0.506
Weight (lbs): 1.12
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: 0-10Vdc dimming


LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 280 / 310 / 330
Nominal Lumen (lm): 448.1 / 483.1 / 513.9
CRI: >90 CRI
Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

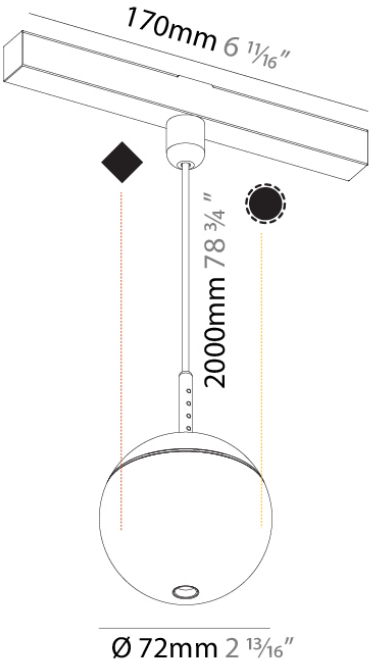

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T117

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Spots

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Length (mm): 166
Length (in): 6 9/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.2
Weight (lbs): 0.44
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL


Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
Zaneen Company Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

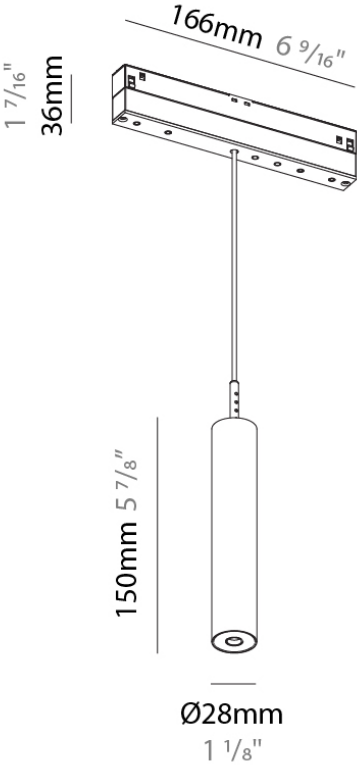

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T118-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 9/16
Light Distribution: Downlight
Weight (kg): 0.32
Weight (lbs): 0.706
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

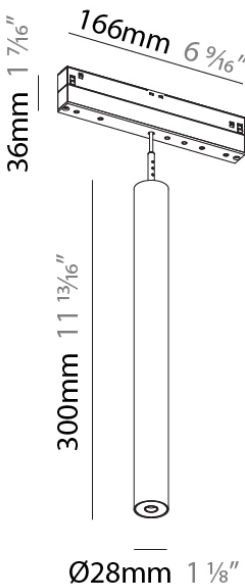

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T119-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 450
Height (in): 17 11/16
Max. Overall Height (mm): 2450
Max. Overall Height (in): 96 7/16
Light Distribution: Downlight
Weight (kg): 0.32
Weight (lbs): 0.706
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

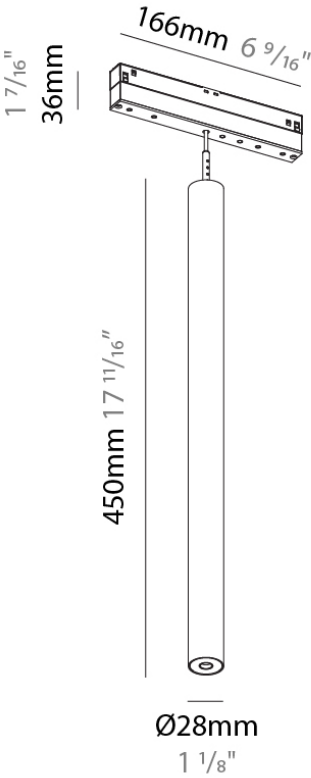

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T120-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Length (mm): 166
Length (in): 6 9/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.2
Weight (lbs): 0.44
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
© 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

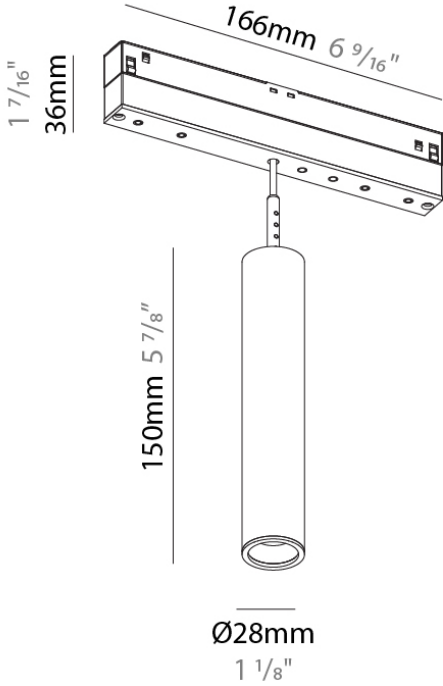

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T121-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32° / 58° - Shine Ring

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 3/16
Light Distribution: Downlight
Weight (kg): 0.32
Weight (lbs): 0.706
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

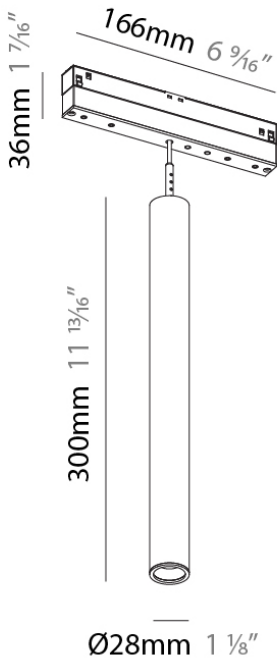

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T122-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 450
Height (in): 17 11/16
Max. Overall Height (mm): 2450
Max. Overall Height (in): 96 7/16
Light Distribution: Downlight
Weight (kg): 0.32
Weight (lbs): 0.706
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 363 / 386
CRI: >90 CRI
Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

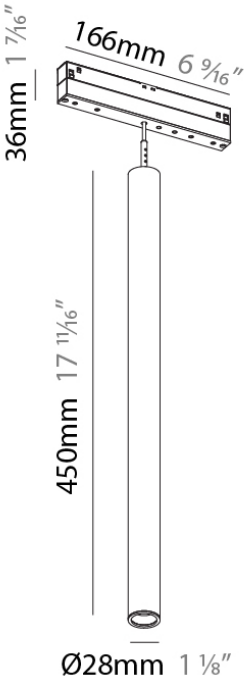

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T129-

DESCRIPTION

Hangover 40 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

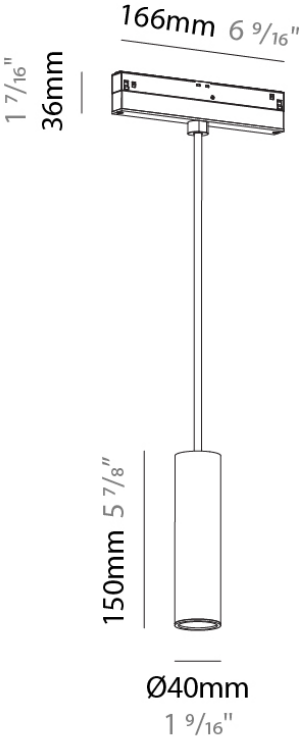

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T130-

DESCRIPTION

Hangover 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 9/16
Light Distribution: Downlight
Weight (kg): 0.666
Weight (lbs): 1.468
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

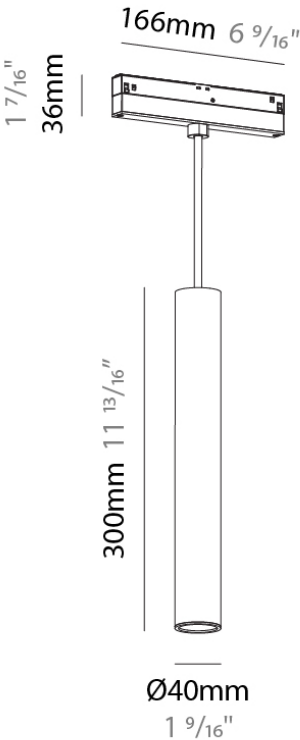

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T131-

DESCRIPTION

Hangover 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 450
Height (in): 17 11/16
Max. Overall Height (mm): 2450
Max. Overall Height (in): 96 7/16
Light Distribution: Downlight
Weight (kg): 0.856
Weight (lbs): 1.887
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

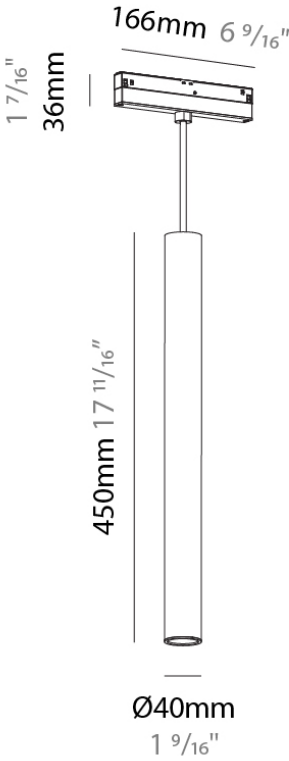

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T132-

DESCRIPTION

Hangover Plug 40 - Track Head - 150mm / 5 7/8" - 10W LED
(Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40° / 50°

GENERAL

Series: Hangover
Subseries: Hangover Plug 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /
ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black /
Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

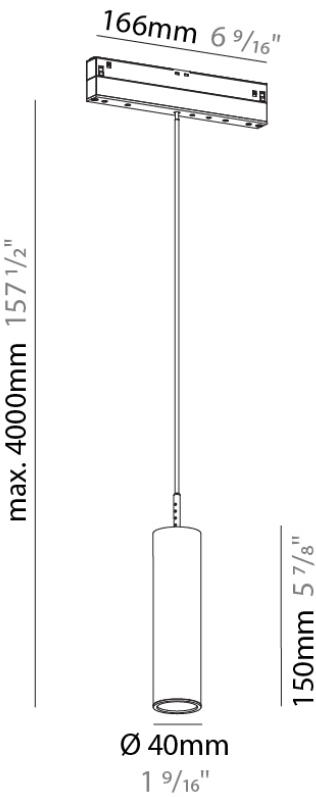

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T133-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover Plug 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 9/16
Light Distribution: Downlight
Weight (kg): 0.666
Weight (lbs): 1.468
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

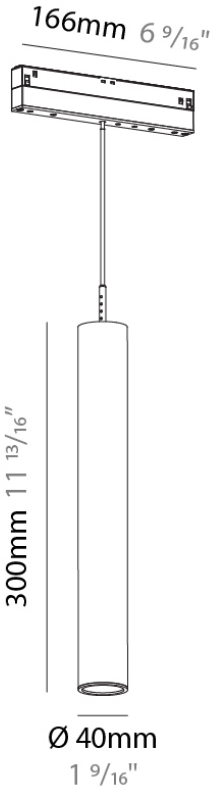

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T134-

DESCRIPTION

Hangover Plug 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover Plug 40
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 450
Height (in): 17 11/16
Max. Overall Height (mm): 2450
Max. Overall Height (in): 96 7/16
Light Distribution: Downlight
Weight (kg): 0.856
Weight (lbs): 1.887
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 788 / 829 / 840
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



A3CLK30-SUS-SYS COMPONENTS TRACK

A3T135-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 898 / 944 / 956
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL


Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

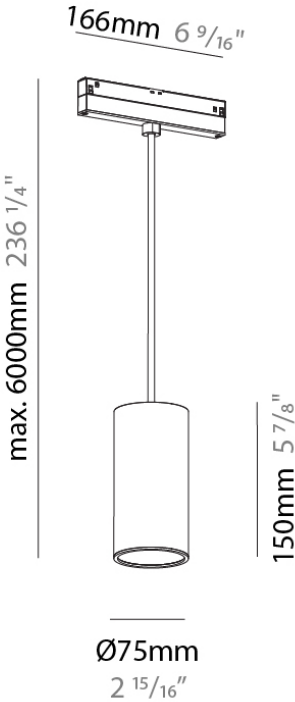

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T136-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 20.8W
LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector
18°/36°/52°

GENERAL

Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Direct / Indirect
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /
ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black /
Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 20.8
Total Output Wattage (W): 19
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1729 - 1837
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

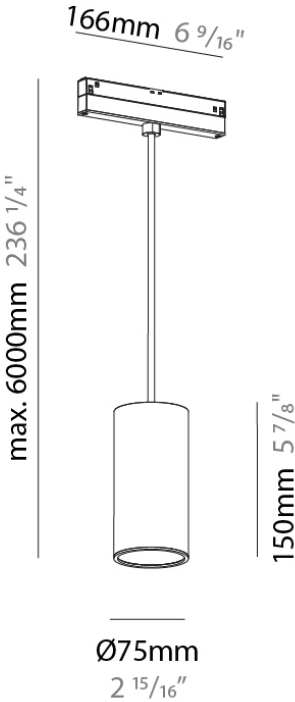

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T137-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 9/16
Light Distribution: Downlight
Weight (kg): 0.666
Weight (lbs): 1.468
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 898 / 944 / 956
Nominal Lumen (lm): 1016 / 1068 / 1082
CRI: >90 CRI


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

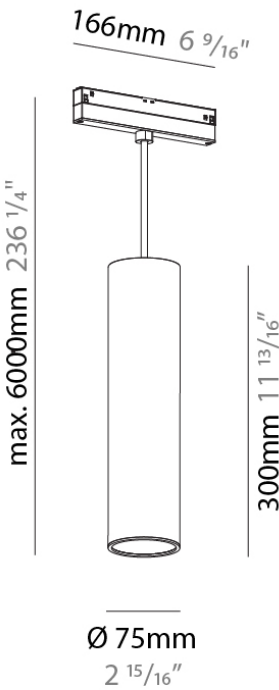

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T138-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 40°/50°

GENERAL

Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 300
Height (in): 11 13/16
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 9/16
Light Distribution: Downlight
Weight (kg): 0.666
Weight (lbs): 1.468
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 20.8
Total Output Wattage (W): 19
Dimming: Non-Dimmable
Driver Included: No
Driver Type: Constant Voltage - Universal
Input Voltage (V): 48
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1729 - 1837
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

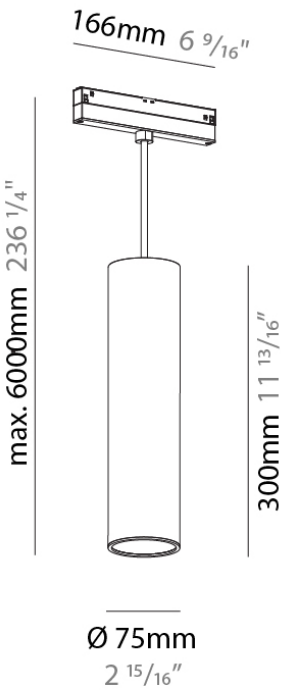

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T139-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - 6W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover
Subseries: Hangover Plug 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 385 / 408 / 442
Nominal Lumen (lm): 455.22 / 482 / 522.17
CRI: >90 CRI


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

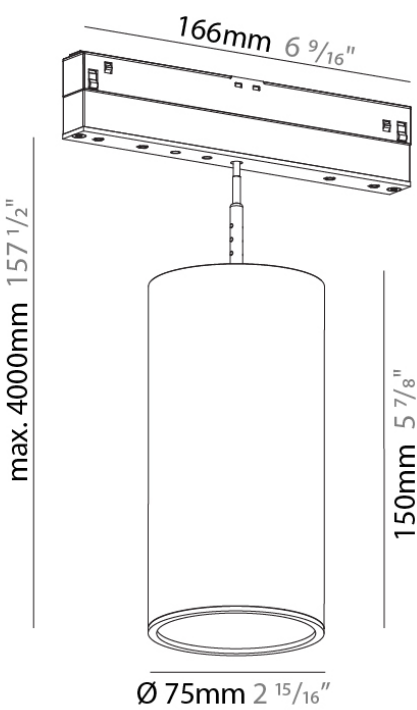

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T140-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover
Subseries: Hangover Plug 75
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Max. Overall Height (mm): 2150
Max. Overall Height (in): 84 5/8
Light Distribution: Downlight
Weight (kg): 0.433
Weight (lbs): 0.955
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 8.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 708 - 788
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

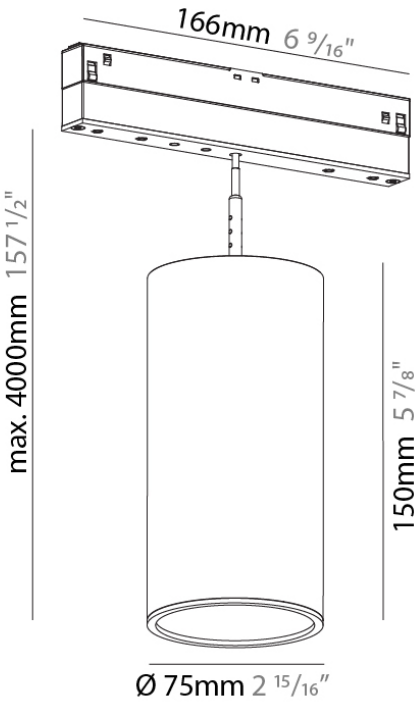

ENCP50

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 670

Length (in): 26 3⁄8

Width (mm): 44

Width (in): 1 3⁄4

Height (mm): 38

Height (in): 1 1⁄2


Gasket: 1554JGASKET

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

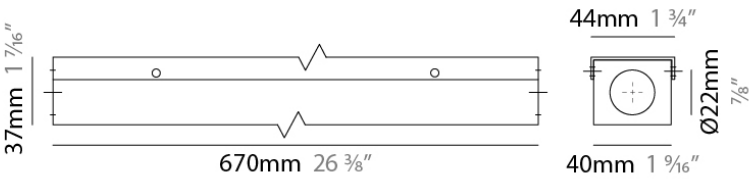

PROJECT
TYPE
NOTES
QUANTITY
DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)