

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A30850-

DESCRIPTION

G-50 Channel | Gravity Lift - Suspension Profile - 1000mm / 39 3/8" / 2000mm / 78 3/4" / 3000mm / 118 1/8"

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL


Shape: Rectangle  
Length (mm): 1000 / 2000 / 3000  
Length (in): 39 3/8  
Width (mm): 48  
Width (in): 1 7/8  
Height (mm): 135  
Height (in): 5 5/16  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast  
Cable Details: 2,000mm or 6,000mm Transparent Cable

ELECTRICAL

Dimming: 0-10V Dimming  
Input Voltage (V): 120 - 277  
Constant Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

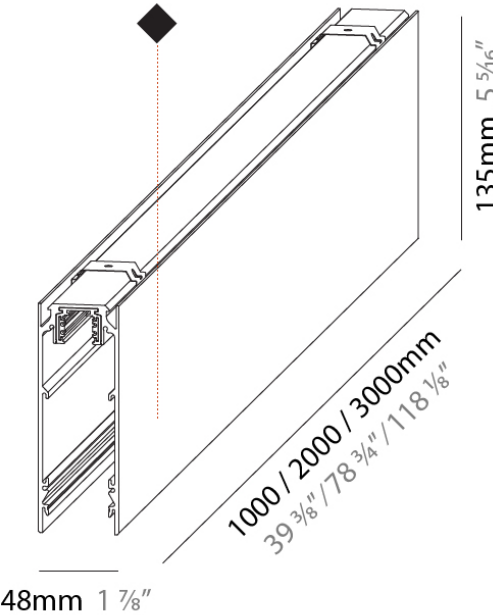

A3G50-SUS-SYS COMPONENTS

A380041-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32° / 58°

GENERAL

Series: Hangover  
Subseries: Hangover Plug Standard (Track Insert)  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 300  
Height (in): 11 13/16  
Light Distribution: Downlight  
Weight (kg): 0.451  
Weight (lbs): 0.99  
Diffuser: Shine Ring 1-6  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum  
Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.4  
Total Output Wattage (W): 5.8  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 328 / 363 / 386  
Nominal Lumen (lm): 448 / 483 / 514  
CRI: >90 CRI  
Upon Request: Special Color Temperature


OPTICAL

Optic°: 24 / 32 / 58  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

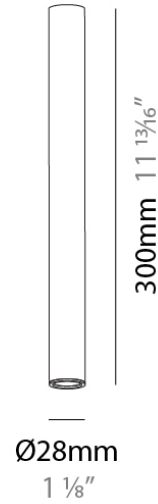

A3G50-SUS-SYS COMPONENTS

A380042-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32° / 58° -

GENERAL

Series: Hangover  
Subseries: Hangover Plug Standard (Track Insert)  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 450  
Height (in): 17 11/16  
Light Distribution: Downlight  
Weight (kg): 0.468  
Weight (lbs): 1.03  
Diffuser: Shine Ring 1-6  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.4  
Total Output Wattage (W): 5.8  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120  
Constant Current (MA): 500

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 328 / 363 / 386  
Nominal Lumen (lm): 448 / 483 / 514  
CRI: >90 CRI  
Upon Request: Special Color Temperature

OPTICAL

Optic°: 24 / 32 / 58  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



A3G50-SUS-SYS COMPONENTS

A380043-

DESCRIPTION

Hangover Plug Decor - Blank Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" -

GENERAL

Series: Hangover  
Subseries: Hangover Plug Standard (Track Insert)  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 300  
Height (in): 11 13/16  
Weight (kg): 0.32  
Weight (lbs): 0.706  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A3G50-SUS-SYS COMPONENTS

A380044-

DESCRIPTION

Hangover Plug Decor - Blank Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" -

GENERAL

Series: Hangover  
Subseries: Hangover Plug Standard (Track Insert)  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 450  
Height (in): 17 11/16  
Weight (kg): 0.32  
Weight (lbs): 0.706  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast


ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

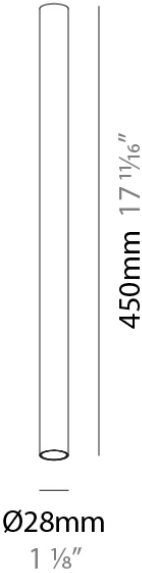

A3G50-SUS-SYS COMPONENTS

A380085-

DESCRIPTION

G-50 Channel Suspension Cable Kit 2000mm

GENERAL

Series: Snooker  
Brand: Prolicht  
Division: Architectural


PHYSICAL

Length (mm): 2000  
Length (in): 78 3/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

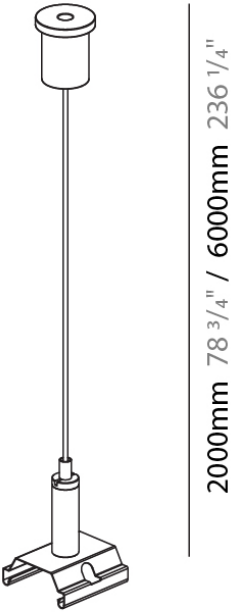

A3G50-SUS-SYS COMPONENTS

A380106-

DESCRIPTION

Hangover 75 - Indirect Diffuser

GENERAL

Series: Hangover  
Subseries: Hangover 75  
Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Round  
Diameter (mm): 70  
Diameter (in): 2 3/4  
Fixture Finish: RED / ORG / YEL / GRN / BLU  
Fixture Material: Acrylic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

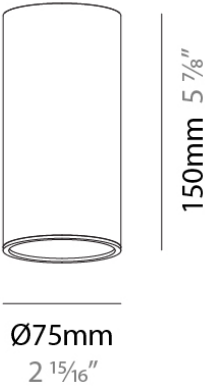

A3G50-SUS-SYS COMPONENTS SURFACE

A380107-

DESCRIPTION

Hangover Plug 40 - 150mm / 5 7/8" - 10.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector 40° / 50°

GENERAL

Series: Hangover  
Subseries: Hangover Plug 40  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface  
Mounting Location: Ceiling  
Subcategory: Downlight

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 150  
Height (in): 5 7/8  
Light Distribution: Downlight  
Weight (kg): 0.452  
Weight (lbs): 9.96  
Diffuser: Shine Ring 1-6  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 10.9  
Total Output Wattage (W): 10  
Dimming: 0-10V Dimming  
Driver Included: No  
Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 788 / 829 / 840  
Nominal Lumen (lm): 1016 / 1068 / 1082  
CRI: >90 CRI  
Lamp Life (hrs): 50000


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

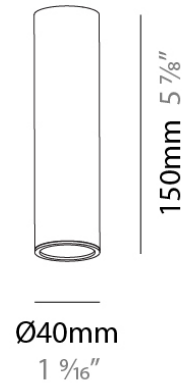



A3G50-SUS-SYS COMPONENTS SURFACE

A380108-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector - 40°/50°

GENERAL

Series: Hangover  
Subseries: Hangover Plug 40  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface  
Mounting Location: Ceiling  
Subcategory: Downlight

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 300  
Height (in): 11 13/16  
Light Distribution: Downlight  
Weight (kg): 0.463  
Weight (lbs): 1.02  
Diffuser: Shine Ring 1-6  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 10.9  
Total Output Wattage (W): 10  
Dimming: 0-10V Dimming  
Driver Included: No  
Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 788 / 829 / 840  
Nominal Lumen (lm): 1016 / 1068 / 1082  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A3G50-SUS-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380111-

DESCRIPTION

Hangover Plug 75 - Track Head -150mm / 5 7/8" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens 9° / 24° / 39°

GENERAL

Series: Hangover
Subseries: Hangover Plug 75
Brand: Prolicht
Division: Architectural
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Light Distribution: Downlight
Weight (kg): 0.532
Weight (lbs): 1.17
Diffuser: Shine Ring 1-6
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.6
Total Output Wattage (W): 6
Dimming: 0-10V Dimming
Driver Included: No
Input Voltage (V): 48

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 385 / 408 / 442
Nominal Lumen (lm): 455.22 / 482 / 522.17
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Optic°: 9 / 24 / 39
---------------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

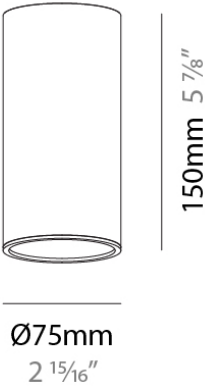

A3G50-SUS-SYS COMPONENTS

A380364-

DESCRIPTION

Hangover Plug - Insert for Hypro 40 Recessed Ø28mm / 1 1/8" x 150mm / 5 7/8" - LED 6W Max. - 2700K / 3000K / 3500K / 4000K - CRI90 - Non-Dimming - Shine Ring, Optic: 22° / 33° / 66°

GENERAL

Series: Hangover  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 150  
Height (in): 5 7/8  
Light Distribution: Direct  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6  
Total Output Wattage (W): 5.4  
Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Driver Type: Constant Current - 120Vac  
Driver Class: Class 2  
Input Voltage (V): 120  
Constant Current (mA): 500

LED

Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 404 / 427 / 454 / 463  
Nominal Lumen (lm): 461 / 487 / 517 / 528  
CRI: >90 CRI  
Lamp Life (hrs): 50000



OPTICAL

Optic°: 22 / 33 / 66

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

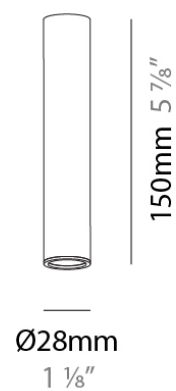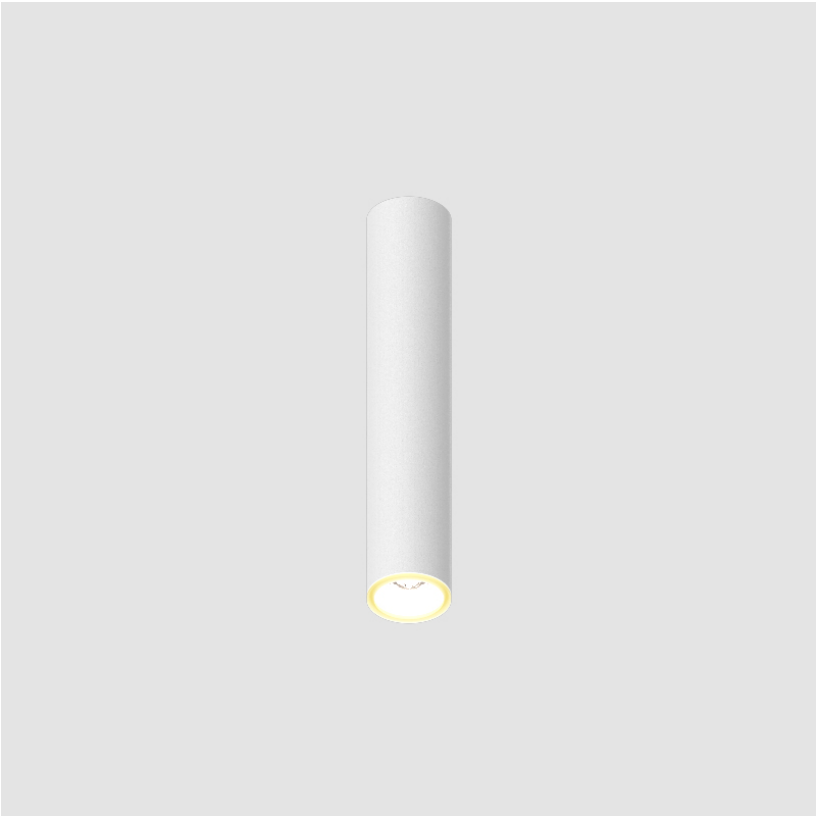

A3G50-SUS-SYS COMPONENTS

A38818-

DESCRIPTION

Snooker Decor - Track - Blank Globe -

GENERAL

Series: Snooker  
Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Round  
Diameter (mm): 72  
Diameter (in): 2 13/16  
Height (mm): 72  
Height (in): 2 13/16  
Weight (kg): 0.733  
Weight (lbs): 1.62  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Aluminum Die Cast

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

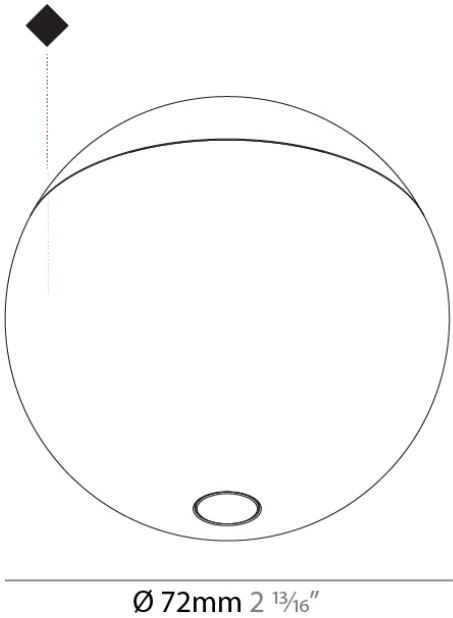

A3G50-SUS-SYS COMPONENTS

A38837

DESCRIPTION

G-50 Channel | Gravity Lift - Connector Device

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural  
Subcategory: Profile


PHYSICAL

Shape: Rectangle  
Length (mm): 180  
Length (in): 7 1/16  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 52  
Height (in): 2 1/16  
Weight (kg): 0.135  
Weight (lbs): 0.3  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

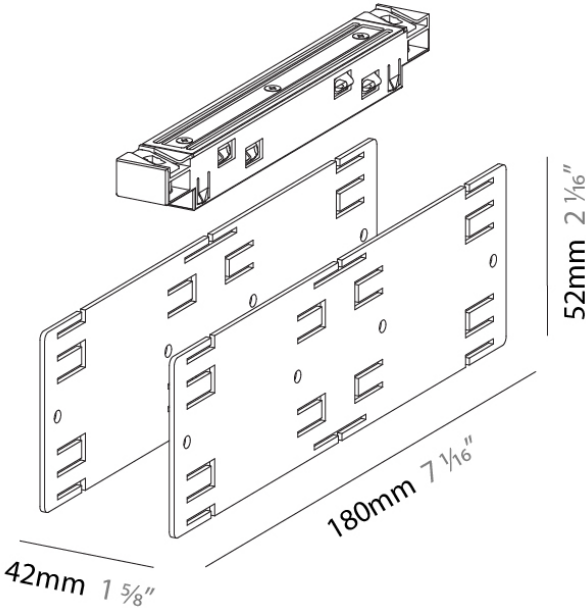

A3G50-SUS-SYS COMPONENTS

A38838-

DESCRIPTION

G-50 Channel | Gravity Lift - Supplier Unit 150W Track 48V

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 336  
Length (in): 13 1/4  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 120  
Height (in): 4 3/4  
Weight (kg): 1.325  
Weight (lbs): 2 15/16  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Plastic


ELECTRICAL

Total Output Wattage (W): 96  
Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

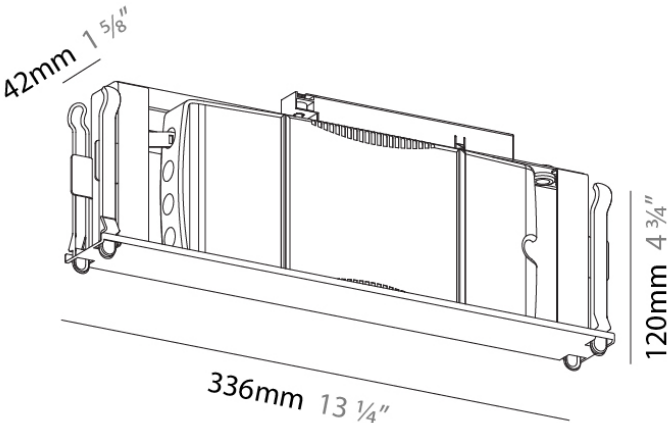

A3G50-SUS-SYS COMPONENTS

A38839-

DESCRIPTION

G-50 Channel | Gravity Lift - Power Supply Unit c/w Remote 96W, 0-10V Dimming Driver + Bridge - for 48Vdc Track - Trimless

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 336  
Length (in): 13 1/4  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 120  
Height (in): 4 3/4  
Weight (kg): 1.325  
Weight (lbs): 2 15/16  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum


ELECTRICAL

Input Wattage Range: 100 - 149 W  
Lamp Type: LED  
Input Wattage (W): 100  
Total Output Wattage (W): 96  
Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120-277Vac  
Driver Class: Class 2  
Input Voltage (V): Universal  
Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

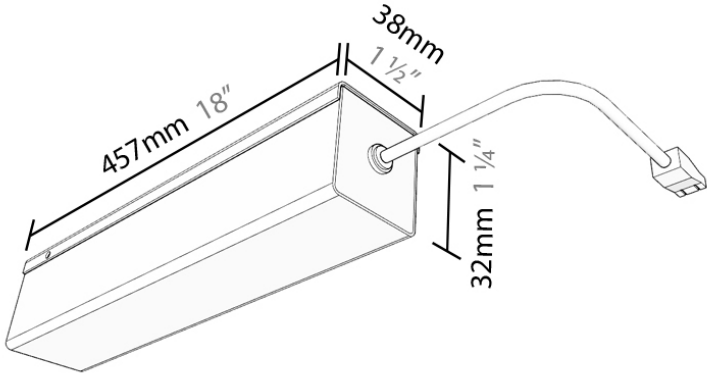

A3G50-SUS-SYS COMPONENTS

A38840-

DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (non-dimming)

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 350  
Length (in): 13 3/4  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 120  
Height (in): 4 3/4  
Weight (kg): 0.587  
Weight (lbs): 1.29  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum



ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

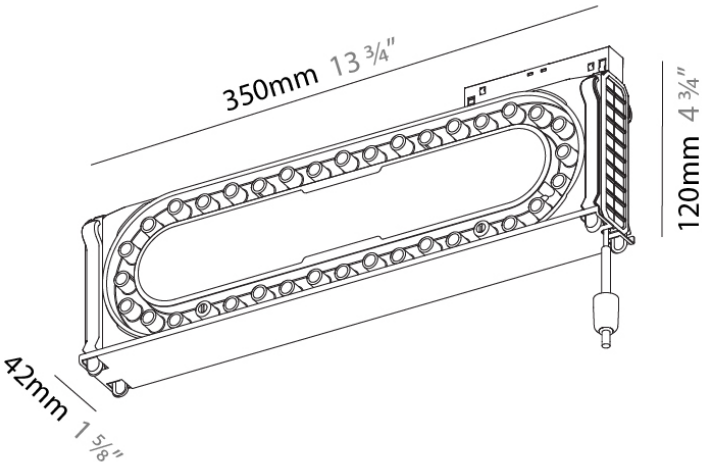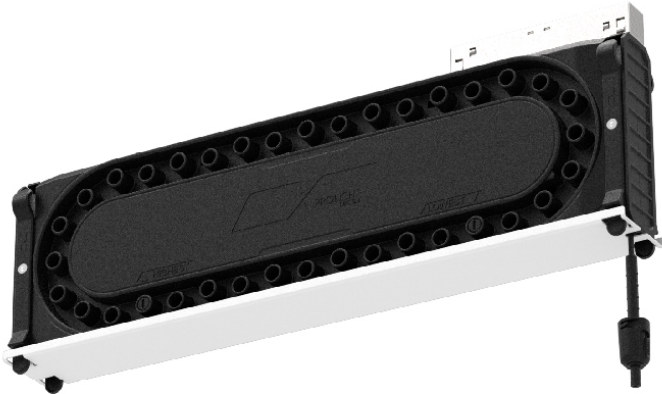



A3G50-SUS-SYS COMPONENTS

A38841-

DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (0-10V Dimmable)

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 350  
Length (in): 13 3/4  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 120  
Height (in): 4 3/4  
Weight (kg): 0.601  
Weight (lbs): 1.32  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum



ELECTRICAL

Dimming: 0-10V Dimming

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

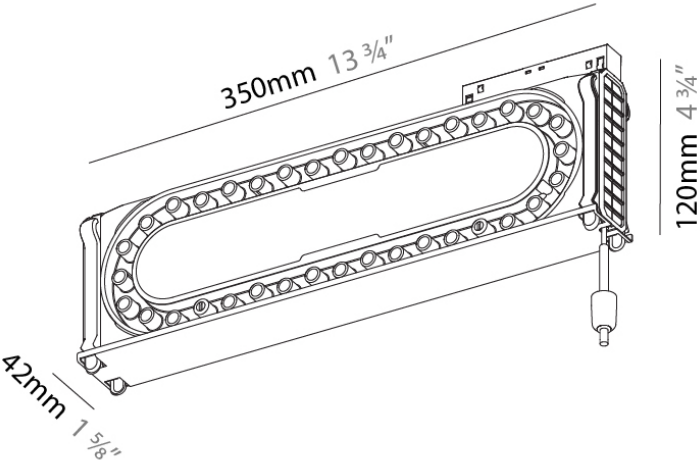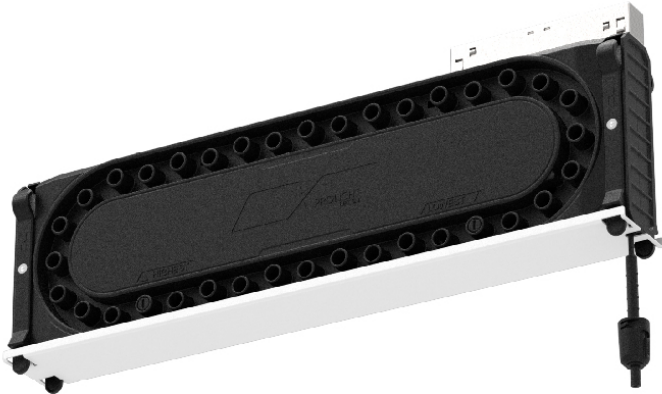

A3G50-SUS-SYS COMPONENTS

A38842-

DESCRIPTION

G-50 Channel | Gravity Lift - Mechanical Gravity Lift for G-50

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural



PHYSICAL

Shape: Rectangle  
Length (mm): 350  
Length (in): 13 3/4  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 105  
Height (in): 4 1/8  
Weight (kg): 0.582  
Weight (lbs): 1.28  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

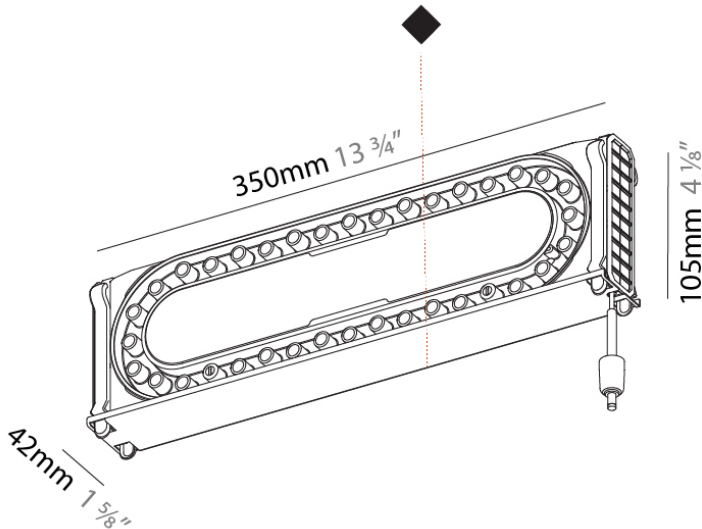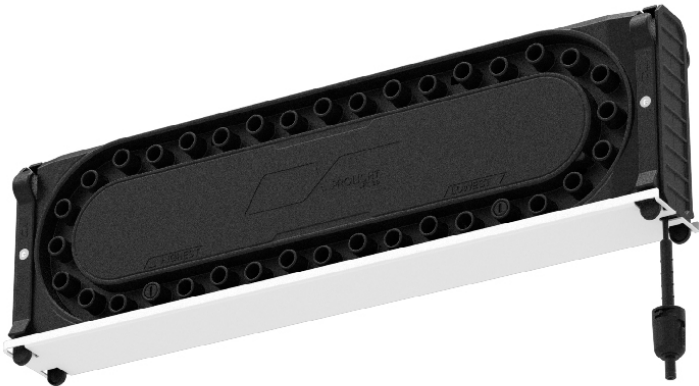

A3G50-SUS-SYS COMPONENTS

A38862-

DESCRIPTION

Snooker - Track- Suspension Insert for Gravity Lift - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Round  
Diameter (mm): 72  
Diameter (in): 2 13/16  
Height (mm): 72  
Height (in): 2 13/16  
Light Distribution: Downlight  
Weight (kg): 0.733  
Weight (lbs): 1.62  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 5.8  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 48  
Constant Current (MA): 500

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 270 / 290 / 310  
Nominal Lumen (lm): 448 / 483 / 514  
CRI: >90 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)



OPTICAL

Beam Angle: 55  
Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

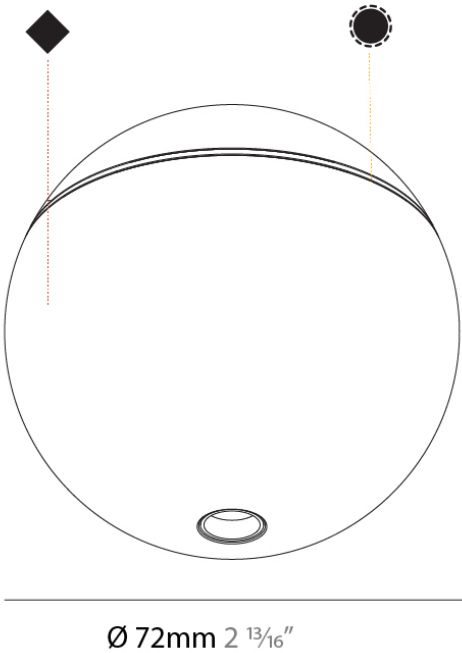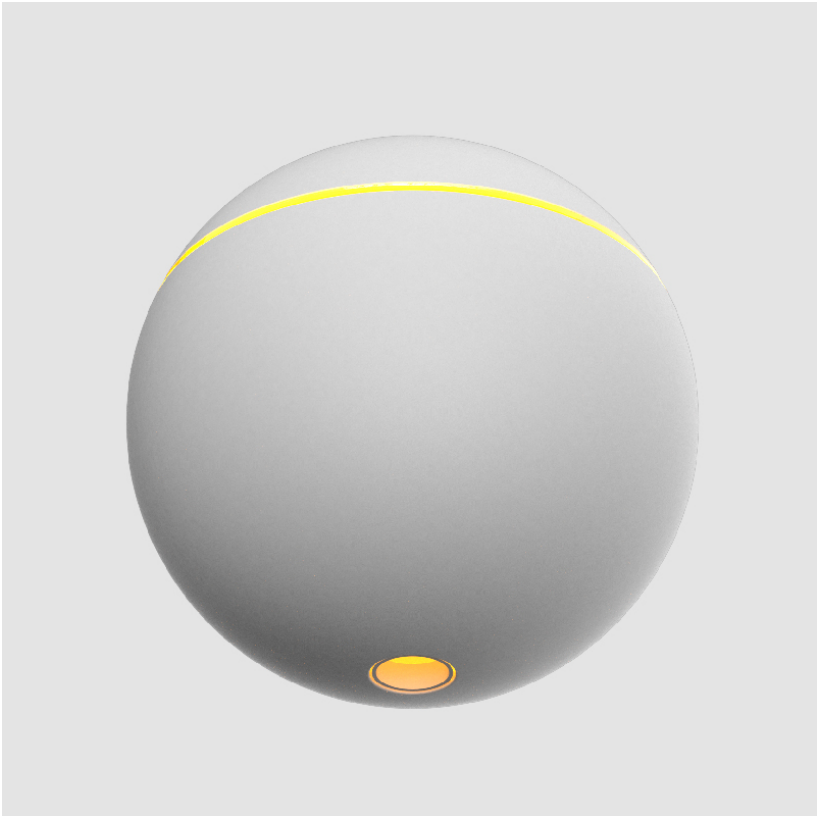

A3G50-SUS-SYS COMPONENTS

A38866-

DESCRIPTION

Snooker - Track - Suspension Insert - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Round  
Diameter (mm): 72  
Diameter (in): 2 13/16  
Height (mm): 72  
Height (in): 2 13/16  
Light Distribution: Downlight  
Weight (kg): 0.733  
Weight (lbs): 1.6  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 5.8  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 48  
Constant Current (MA): 500

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 270 / 290 / 310  
Nominal Lumen (lm): 448 / 483 / 514  
CRI: >90 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Beam Angle: 55  
Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

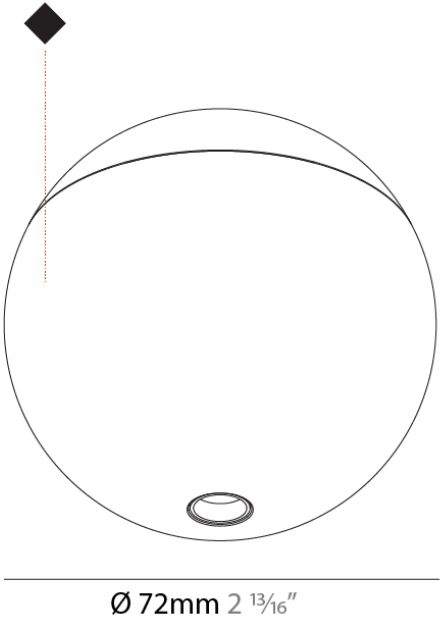

A3G50-SUS-SYS COMPONENTS

A38947-

DESCRIPTION

G-50 Channel | Gravity Lift - Surface Profile - End Plate 1 pair -

GENERAL

Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Rectangle  
Length (mm): 48  
Length (in): 1 7/8  
Width (mm): 13  
Width (in): 1/2  
Height (mm): 135  
Height (in): 5 5/16  
Weight (kg): 0.55  
Weight (lbs): 1.21  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

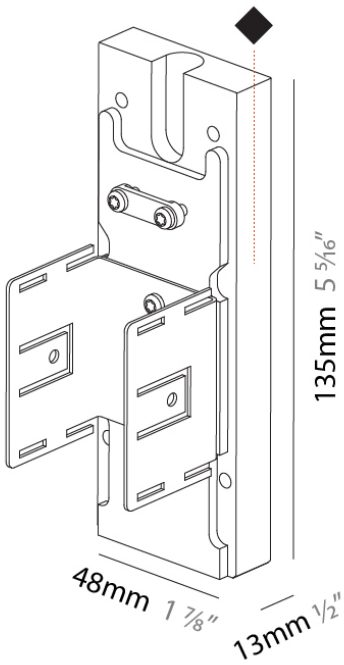

A3G50-SUS-SYS COMPONENTS

A3T100-

DESCRIPTION

Centriq - Track Head - 4.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens: 24°/32°

GENERAL

Series: Centriq  
Brand: Prolicht  
Division: Architectural  
Subcategory: Spots

PHYSICAL

Shape: Cylinder  
Diameter (mm): 30  
Diameter (in): 1 5/8  
Height (mm): 186  
Height (in): 7 5/16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.078  
Weight (lbs): 0.17  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 4.4  
Total Output Wattage (W): 4  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 260 / 270 / 290  
Nominal Lumen (lm): 344 / 360 / 392  
CRI: >90 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32  
Adjustability: Rotational 360°; Tilt 90°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

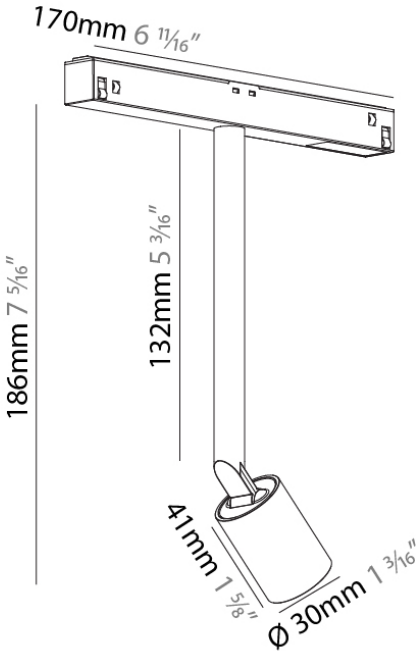

A3G50-SUS-SYS COMPONENTS

A3T101-

DESCRIPTION

Centriq - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq  
Brand: Prolicht  
Division: Architectural  
Subcategory: Spots

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 200  
Height (in): 7 7/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.132  
Weight (lbs): 0.29  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 5.8  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 360 / 390 / 420  
Nominal Lumen (lm): 448 / 483 / 514  
CRI: >90 CRI  
Upon Request: Special Color Temperature \*\*\*3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Reflector°: 10  
Adjustability: Rotational 360°; Tilt 90°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

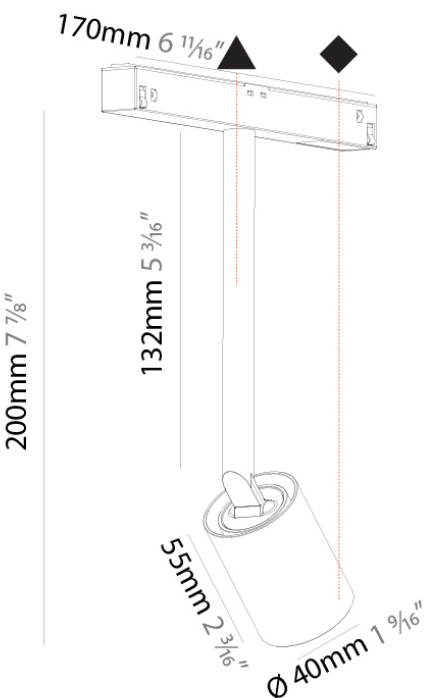

A3G50-SUS-SYS COMPONENTS

A3T102-

DESCRIPTION

Centriq - Track Head - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

GENERAL

Series: Centriq  
Brand: Prolicht  
Division: Architectural  
Subcategory: Spots

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 200  
Height (in): 7 7/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.159  
Weight (lbs): 0.35  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 5.9  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED

Delivered Lumen Range: 100 - 499 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 468 / 490 / 520  
Nominal Lumen (lm): 732 / 769 / 780  
CRI: >90 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Reflector°: 20 / 31 / 36 / 40 / 50  
Adjustability: Rotational 360°; Tilt 90°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

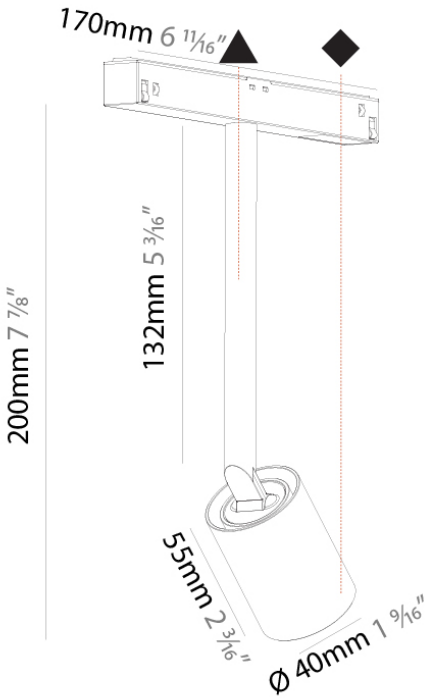



A3G50-SUS-SYS COMPONENTS

A3T103-

DESCRIPTION

Centriq - Track Head - 9.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq  
Brand: Prolicht  
Division: Architectural  
Subcategory: Spots

PHYSICAL

Shape: Cylinder  
Diameter (mm): 55  
Diameter (in): 2 3/16  
Height (mm): 224  
Height (in): 8 13/16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.554  
Weight (lbs): 1.22  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 9.2  
Total Output Wattage (W): 8.4  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED

Delivered Lumen Range: 500 - 999 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 486 / 534 / 548  
Nominal Lumen (lm): 625 / 660 / 712  
CRI: >80 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Reflector°: 9  
Adjustability: Rotational 360°; Tilt 90°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

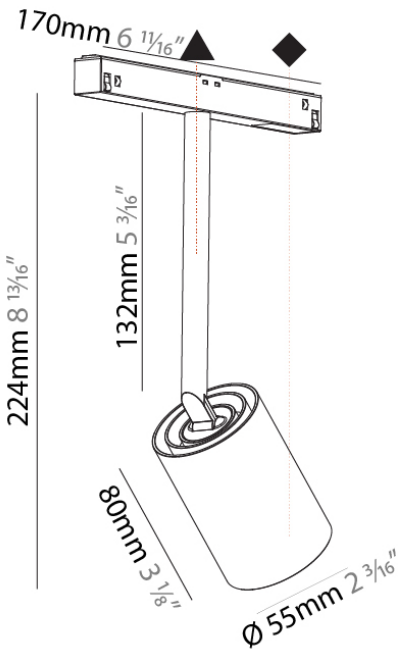

A3G50-SUS-SYS COMPONENTS

A3T104-

DESCRIPTION

Centriq - Track Head - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

GENERAL

Series: Centriq  
Brand: Prolicht  
Division: Architectural  
Subcategory: Spots

PHYSICAL

Shape: Cylinder  
Diameter (mm): 55  
Diameter (in): 2 3/16  
Height (mm): 224  
Height (in): 8 13/16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.562  
Weight (lbs): 1.24  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEV / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 12.0  
Total Output Wattage (W): 10.6  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: External  
Input Voltage (V): 120

LED


Delivered Lumen Range: 500 - 999 lm  
Number of LEDs: 1  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 720 / 760 / 820  
Nominal Lumen (lm): 1196 / 1257 / 1275  
CRI: >90 CRI  
Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 15 / 17 / 25 / 33 / 35 / 46  
Adjustability: Rotational 360°; Tilt 90°  
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

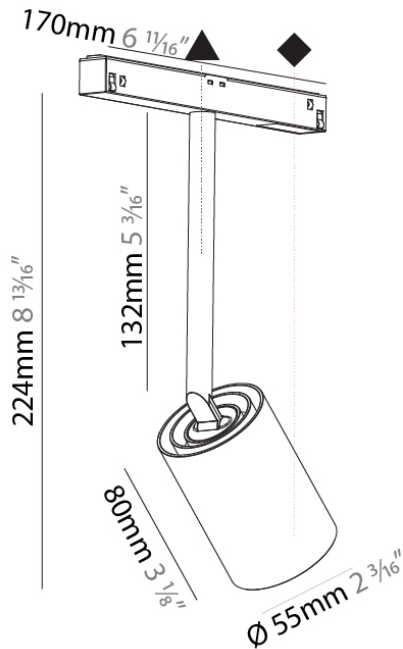

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)