

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A30245-

DESCRIPTION

Super-G 2100/120° - Suspension - Direct - 35W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 1818  
Length (in): 71 9⁄16  
Width (mm): 150  
Width (in): 5 7⁄8  
Height (mm): 120  
Height (in): 4 3⁄4  
Light Distribution: Direct  
Weight (kg): 8.375  
Weight (lbs): 18.46  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 35  
Total Output Wattage (W): 28  
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 3230 / 3342 / 3410  
Nominal Lumen (lm): 4970 / 5145 / 5250  
CRI: >90 CRI  
Efficiency (%): 0.65  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

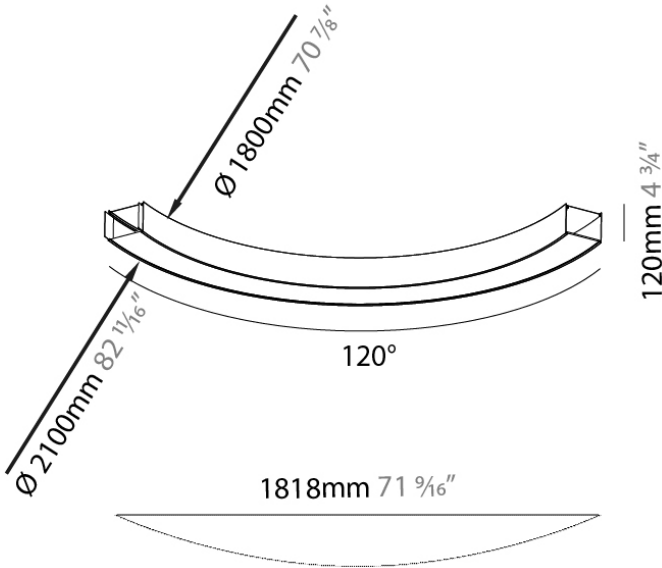

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30247-

DESCRIPTION

Super-G 3100/90° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 2192  
Length (in): 86 5/16  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 9.6  
Weight (lbs): 20.94  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 40  
Total Output Wattage (W): 32  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 350


LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 3690 / 3822 / 3900  
Nominal Lumen (lm): 5680 / 5880 / 6000  
CRI: >90 CRI  
Efficiency (%): 65  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

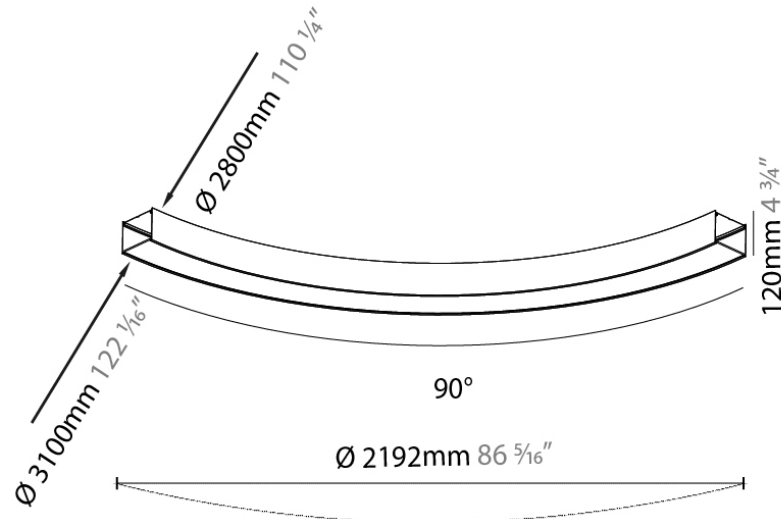

PROJECT
TYPE
NOTES
QUANTITY
DATE

A30249-

DESCRIPTION

Super-G 4000/72° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 2351  
Length (in): 92 9/16  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 9.918  
Weight (lbs): 21.87  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 40  
Total Output Wattage (W): 32  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 3690 / 3822 / 3900  
Nominal Lumen (lm): 5680 / 5880 / 6000  
CRI: >90 CRI  
Efficiency (%): 0.65  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

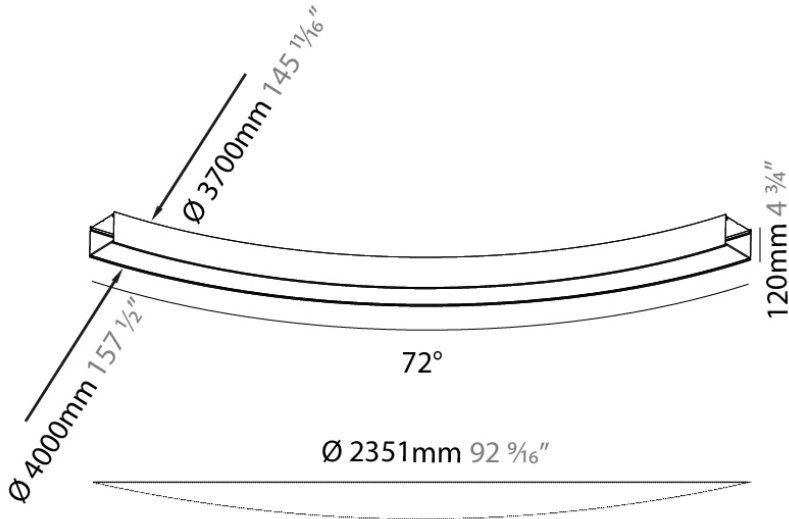

PROJECT
TYPE
NOTES
QUANTITY
DATE

A30251-

DESCRIPTION

Super-G 5400mm / 51° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 2343  
Length (in): 92 1/4  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 9.6  
Weight (lbs): 21.34  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 40  
Total Output Wattage (W): 32  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 3690 / 3822 / 3900  
Nominal Lumen (lm): 5680 / 5880 / 6000  
CRI: >90 CRI  
Efficiency (%): 65  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

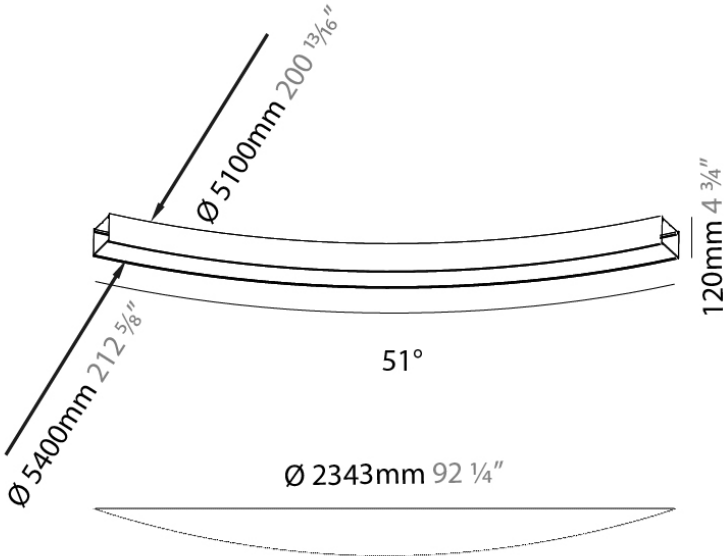

A3SG150-SUS-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A30253-

DESCRIPTION

Super-G - 1150mm / 45 1/4" - Suspension - Direct - 20W LED  
(Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1150  
Length (in): 45 1/4  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 5  
Weight (lbs): 11  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 20 - 29 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 20  
Total Output Wattage (W): 16  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac  
only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 500 - 1999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 1850 / 1911 / 1950  
Nominal Lumen (lm): 2840 / 2940 / 3000  
CRI: >90 CRI  
Efficiency (%): 65%  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

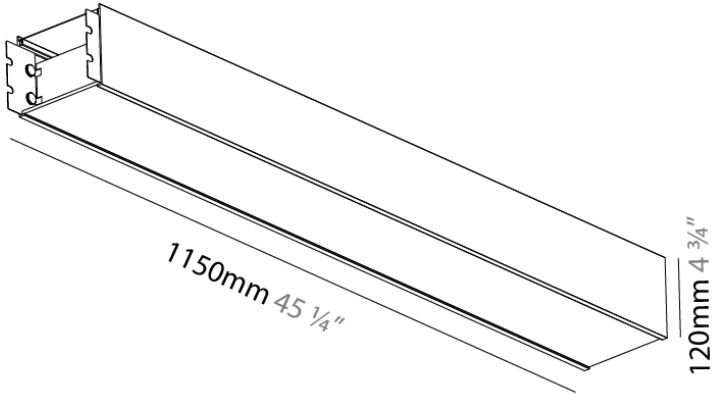

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30255-

DESCRIPTION

Super-G - 1750mm / 68 7/8" - Suspension - Direct - 30W LED  
(Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1750  
Length (in): 68 7/8  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 7.3  
Weight (lbs): 16.09  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 30  
Total Output Wattage (W): 24  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac  
only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350


LED

Delivered Lumen Range: 2000 - 2999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 2770 / 2862 / 2920  
Nominal Lumen (lm): 4260 / 4410 / 4500  
CRI: >90 CRI  
Efficiency (%): 65  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

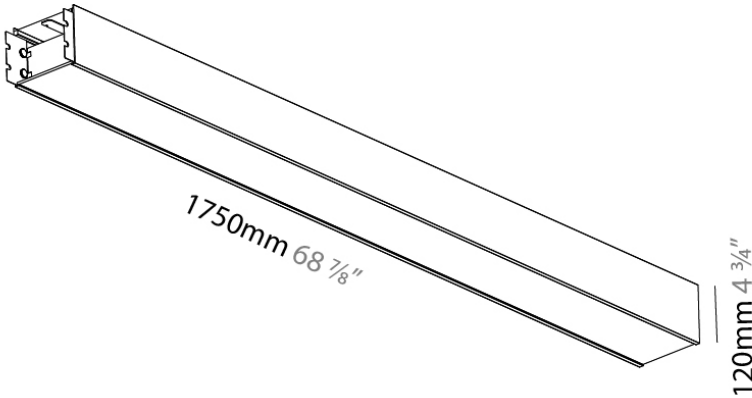

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30531-

DESCRIPTION

Super-G 1150 - Suspension - Direct / Indirect - 20W + 10W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1150  
Length (in): 45 1/4  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct / Indirect  
Weight (kg): 5.255  
Weight (lbs): 11.59  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 20 / 10  
Total Output Wattage (W): 16 Dir / 8 Ind.  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350



LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 1850 / 1911 / 1950 / Ind - 1270 / 1323 / 1350  
Nominal Lumen (lm): 3120 / 3234 / 3300  
CRI: >90 CRI  
Efficiency (%): 69.8  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

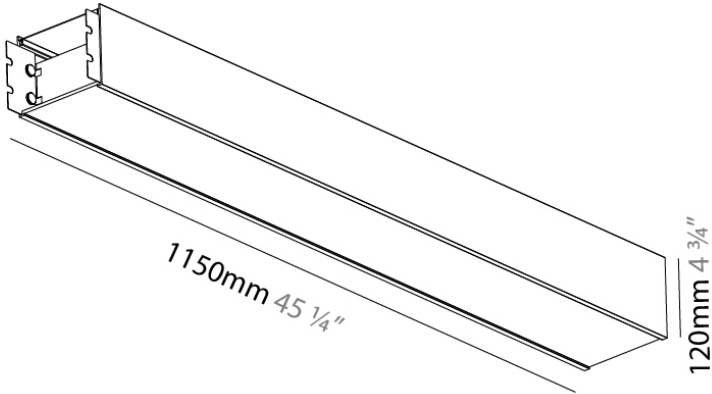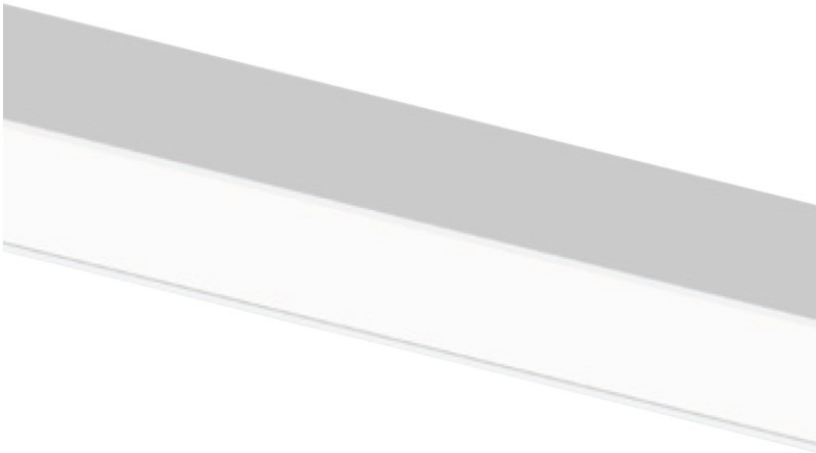

PROJECT
TYPE
NOTES
QUANTITY
DATE

A30533-

DESCRIPTION

Super-G 1750 - Suspension - Direct / Indirect - 30W + 15W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1750  
Length (in): 68 7⁄8  
Width (mm): 150  
Width (in): 5 7⁄8  
Height (mm): 120  
Height (in): 4 3⁄4  
Light Distribution: Direct / Indirect  
Weight (kg): 7.8  
Weight (lbs): 17.2  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL



Input Wattage Range: 30 - 49 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 45  
Total Output Wattage (W): 24 Dir / 12 Ind  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 2770 / 2862 / 2920 / Ind - 1920 / 1989 / 2030  
Nominal Lumen (lm): 6390 / 6615 / 6750  
CRI: >90 CRI  
Efficiency (%): 69.8  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

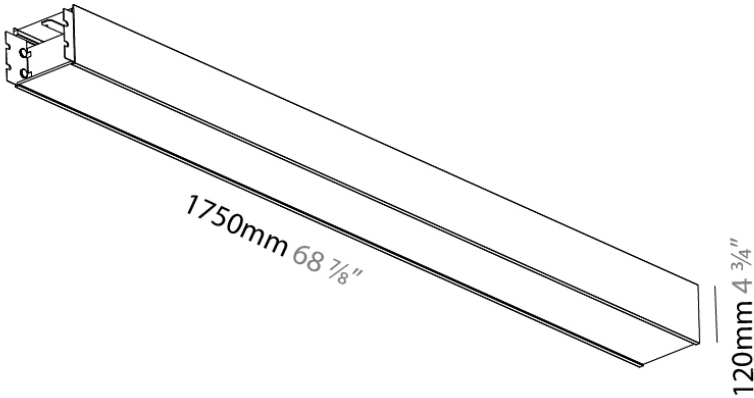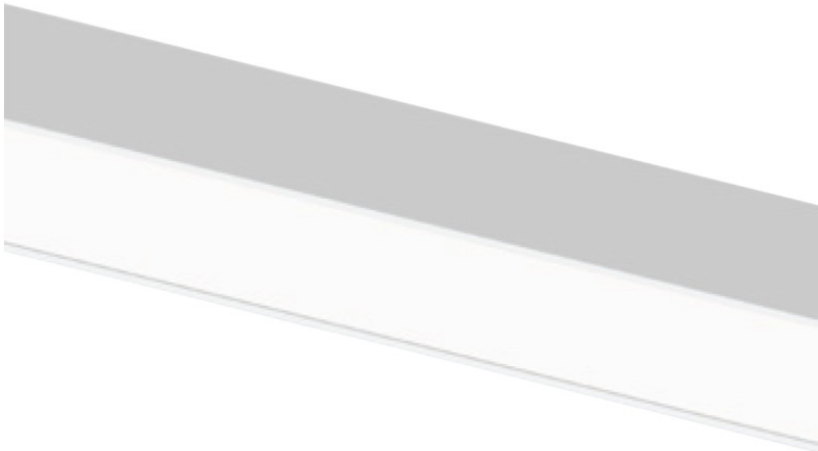



A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30535-

DESCRIPTION

Super-G 2100/120° - Suspension - Direct / Indirect - 35W + 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 1818  
Length (in): 71 9/16  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct / Indirect  
Weight (kg): 8.7  
Weight (lbs): 19.18  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 50 - 79 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 55  
Total Output Wattage (W): 28 - Dir / 16 Ind  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350


LED

Delivered Lumen Range: 5000 - 9999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 3230 / 3342 / 3410 / Ind - 2560 / 2646 / 2700  
Nominal Lumen (lm): 7810 / 8085 / 8250  
CRI: >90 CRI  
Efficiency (%): 0.704  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

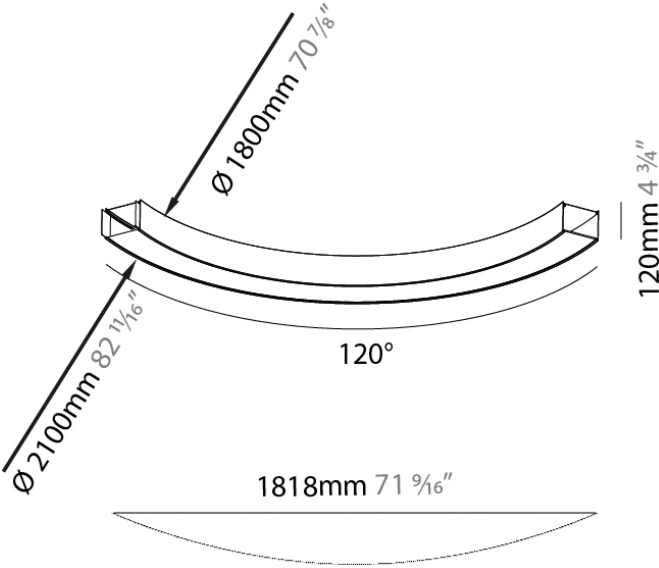

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A30537-

DESCRIPTION

Super-G 3100/90° - Suspension - 60W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 2192  
Length (in): 86 5⁄16  
Width (mm): 150  
Width (in): 5 7⁄8  
Height (mm): 120  
Height (in): 4 3⁄4  
Light Distribution: Direct / Indirect  
Weight (kg): 9.926  
Weight (lbs): 22.88  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 60  
Total Output Wattage (W): 32 Dir / 16 Ind  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 / 2646 / 2700  
Nominal Lumen (lm): 8520 / 8820 / 9000  
CRI: >90 CRI  
Efficiency (%): 69.8  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

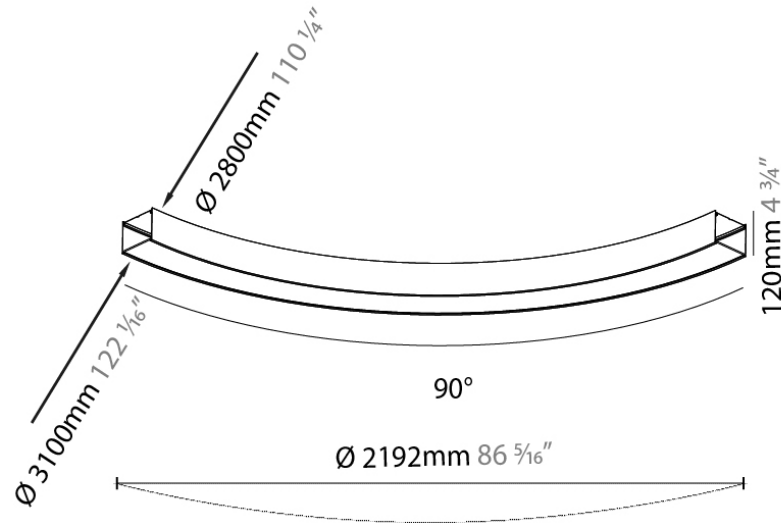

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A30539-

DESCRIPTION

Super-G 4000/72° - Suspension - Direct / Indirect - 40W + 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Diameter (mm): 4000  
Diameter (in): 157 1/2  
Length (mm): 2351  
Length (in): 92 9/16  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct / Indirect  
Weight (kg): 10.5  
Weight (lbs): 23.15  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 40 / 20  
Total Output Wattage (W): 32 Dir / 16 Ind  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 / 2646 / 2700  
Nominal Lumen (lm): 8520 / 8820 / 9000  
CRI: >90 CRI  
Efficiency (%): 69.8  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

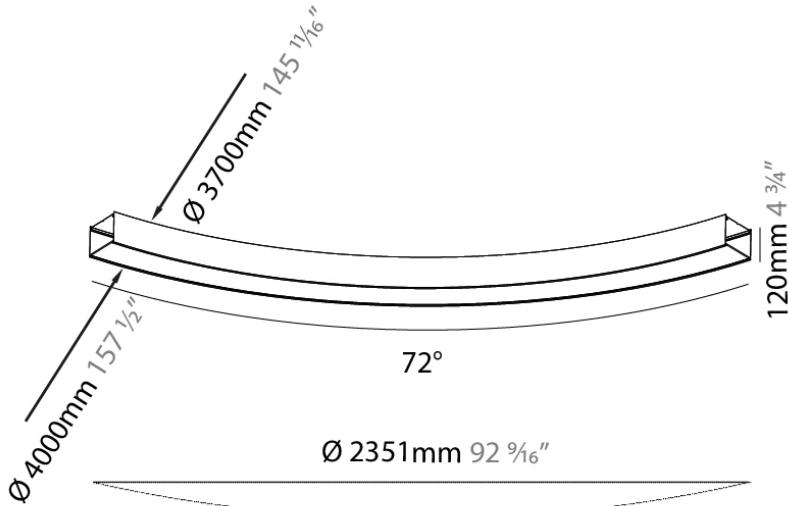

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30541-

DESCRIPTION

Super-G 5400/51° - Suspension - Direct / Indirect - 40W + 20W  
LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Curves  
Length (mm): 2343  
Length (in): 92 1/4  
Width (mm): 150  
Width (in): 5 7/8  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct / Indirect  
Weight (kg): 10.023  
Weight (lbs): 22.1  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 50 - 79 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 60  
Total Output Wattage (W): 32 Dir / 16 Ind  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac  
only) and 0-10V Dimming)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350


LED

Delivered Lumen Range: 5000 - 9999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 /  
2646 / 2700  
Nominal Lumen (lm): 8520 / 8820 / 9000  
CRI: >90 CRI  
Efficiency (%): 0.698  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

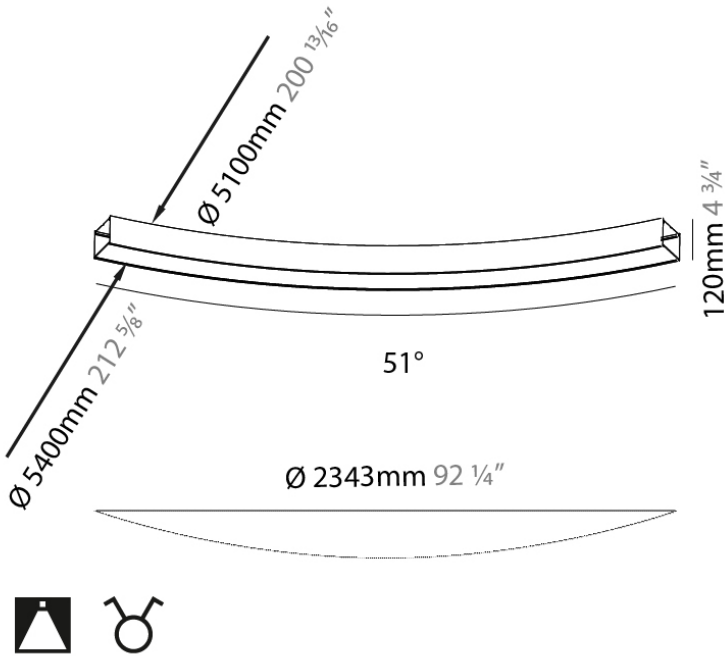

PROJECT
TYPE
NOTES
QUANTITY
DATE

A38115-

DESCRIPTION

Super-G End Cap - Suspension - 3.2W LED (Zhaga Standard) - 3000K / 3500K / 4000K - Dimmable

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Abstract  
Length (mm): 125mm  
Length (in): 4 15/16  
Width (mm): 150  
Width (in): 5 9/10  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 0.62  
Weight (lbs): 1.37  
Diffuser: Opal - PMMA  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 3.2  
Total Output Wattage (W): 2.9  
Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current  
Driver Class: Class 2  
Input Voltage (V): 120  
Constant Current (mA): 350

LED

Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 270 / 284 / 290  
Nominal Lumen (lm): 429 / 462 / 471  
CRI: >90 CRI  
Efficiency (%): 0.624  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20



A3SG150-SUS-SYS COMPONENTS

A38117-

DESCRIPTION

Super-G Suspension Cable - 2000mm -

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 144  
Length (in): 5 11⁄16  
Width (mm): 52  
Width (in): 2 1⁄16  
Height (mm): 200  
Height (in): 78 3⁄4  
Weight (kg): 0.083  
Weight (lbs): 0.19  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum


ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

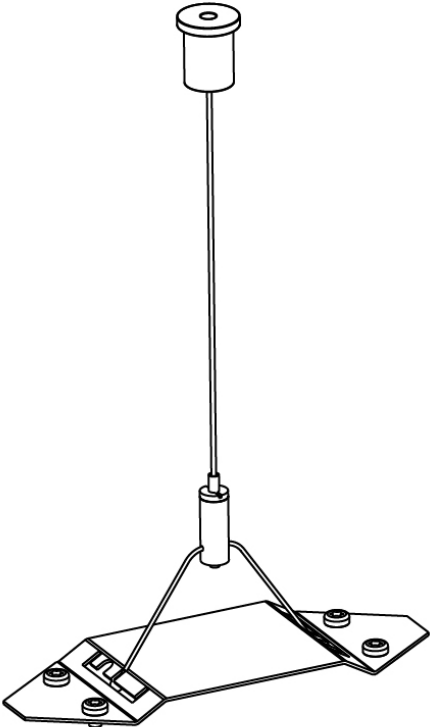

A3SG150-SUS-SYS COMPONENTS

A38118-

DESCRIPTION

Super-G Suspension Cable - 6000mm -

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 144  
Length (in): 5 11/16  
Width (mm): 52  
Width (in): 2 1/16  
Height (mm): 6000  
Height (in): 236 1/4  
Weight (kg): 0.083  
Weight (lbs): 0.19  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum


ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

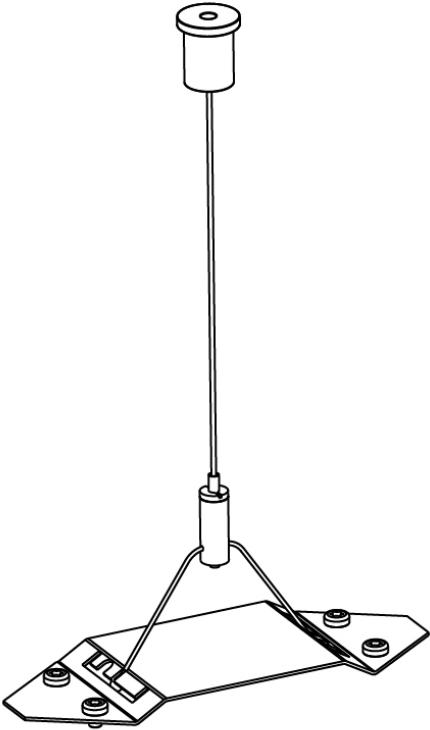

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38151-

DESCRIPTION

Super-G Crossing - Suspension - 10W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G  
Subseries: Super-G 150  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Abstract  
Length (mm): 350  
Length (in): 13 3/4  
Width (mm): 303  
Width (in): 11 15/16  
Height (mm): 120  
Height (in): 4 3/4  
Light Distribution: Direct  
Weight (kg): 1.95  
Weight (lbs): 4.3  
Diffuser: PMMA - Opal  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum

ELECTRICAL



Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 10  
Total Output Wattage (W): 9  
Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Delivered Lumen Range: 500 - 1999 lm  
Color Temperature (°K): 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 940 / 960 / 980  
Nominal Lumen (lm): 1440 / 1470 / 1500  
CRI: >90 CRI  
Efficiency (%): 0.884  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

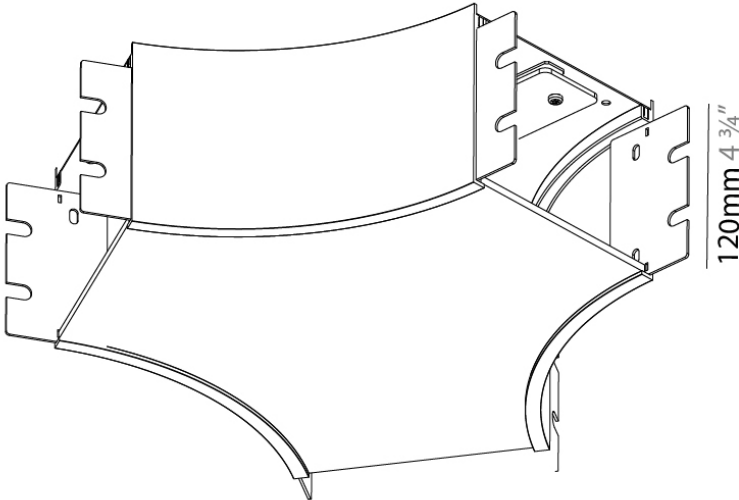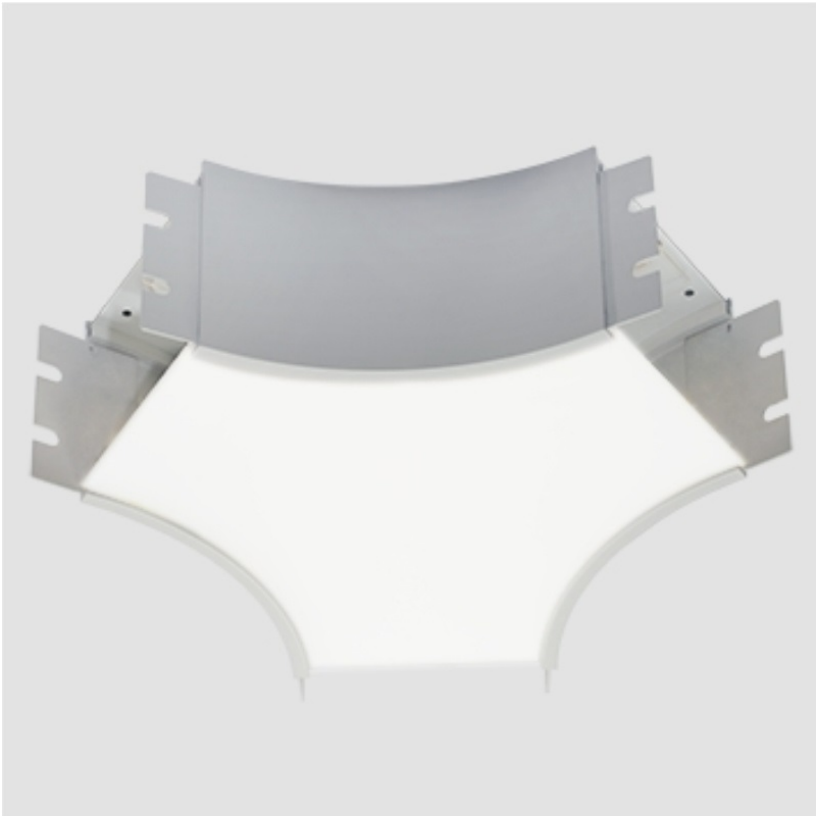



A3SG150-SUS-SYS COMPONENTS

A38346-

DESCRIPTION

Super-G Suspension Flat End Cap

GENERAL

Series: Super-G  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 150  
Length (in): 5 7/8  
Width (mm): 3  
Width (in): 1/8  
Height (mm): 120  
Height (in): 4 3/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Extruded Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

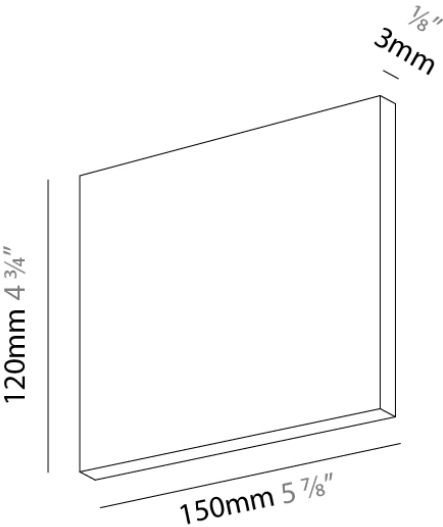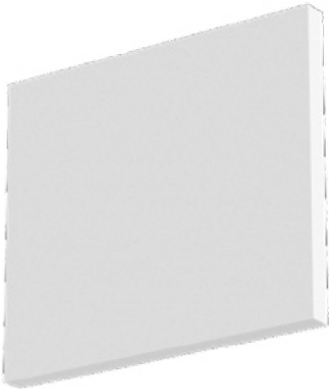

A3SG150-SUS-SYS COMPONENTS

A39013-

DESCRIPTION

Suspension Power Feed 3x0.75, 2000mm

GENERAL

Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Round  
Diameter (mm): 114  
Diameter (in): 4 1/2  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 81  
Width (in): 3 1/16  
Height (mm): 32  
Height (in): 1 1/4  
Weight (kg): 0.3  
Weight (lbs): 0.66  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA /  
RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA /  
POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

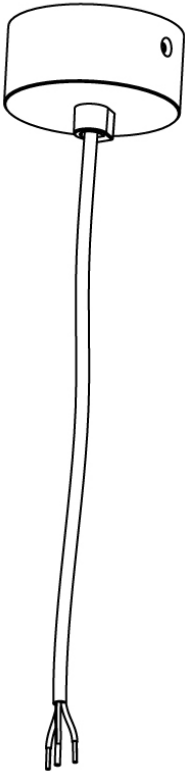

A3SG150-SUS-SYS COMPONENTS

A39014-

DESCRIPTION

Suspension Power Feed 5x0.75 - 2000mm

GENERAL

Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Round  
Diameter (mm): 114  
Diameter (in): 4 1/2  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 81  
Width (in): 3 1/16  
Height (mm): 32  
Height (in): 1 1/4  
Weight (kg): 0.3  
Weight (lbs): 0.661  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA /  
RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA /  
POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

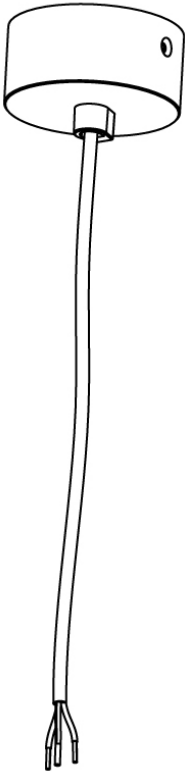

A3SG150-SUS-SYS COMPONENTS

A39016-

DESCRIPTION

Suspension Power Feed 3x0.75, 6000mm

GENERAL

Brand: Prolicht  
Division: Architectural


PHYSICAL

Shape: Round  
Diameter (mm): 114  
Diameter (in): 4 ¼  
Length (mm): 6000  
Length (in): 236 ¼  
Width (mm): 81  
Width (in): 3 ⅞  
Height (mm): 32  
Height (in): 1 ¼  
Weight (kg): 0.117  
Weight (lbs): 0.258  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA /  
RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA /  
POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

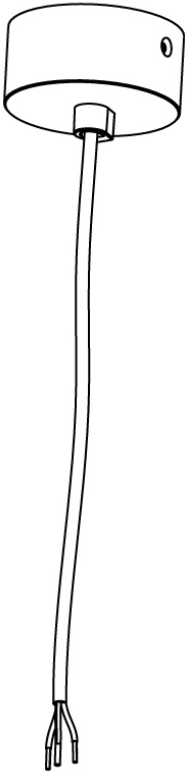

A3SG150-SUS-SYS COMPONENTS

A39017-

DESCRIPTION

Suspension Power Feed 5x0.75, 6000mm

GENERAL

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 81

Diameter (in): 3 3/16

Length (mm): 6000

Length (in): 236 1/4

Width (mm): 81

Width (in): 3 3/16

Height (mm): 32

Height (in): 1 1/4

Weight (kg): 0.117

Weight (lbs): 0.258

Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA /  
RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA /  
POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

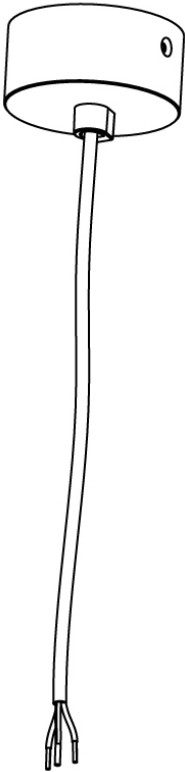

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)