

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR1110-

DESCRIPTION

Track - End Feed - Right Side

GENERAL


Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 148  
Length (in): 5 13/16  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

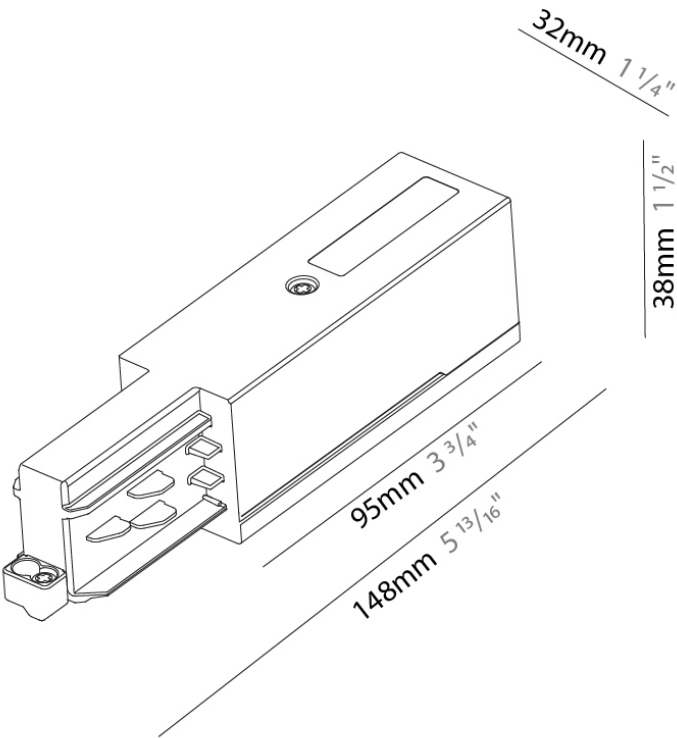

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR121-

DESCRIPTION

Track - End Feed - Left Side

GENERAL


Brand: Prolight  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 148  
Length (in): 5 13/16  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

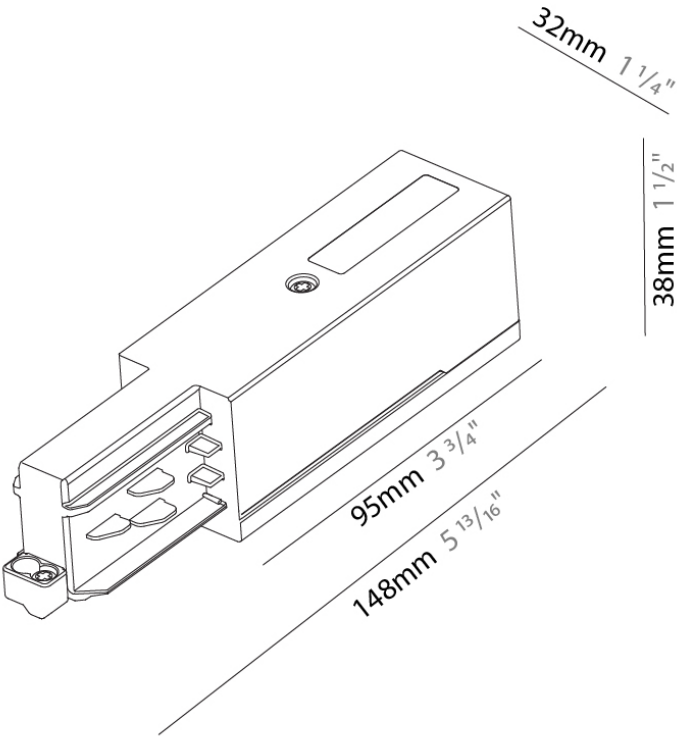

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR141-

DESCRIPTION

Track - Central Feed -

GENERAL



Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 254  
Length (in): 10  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 5/16  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

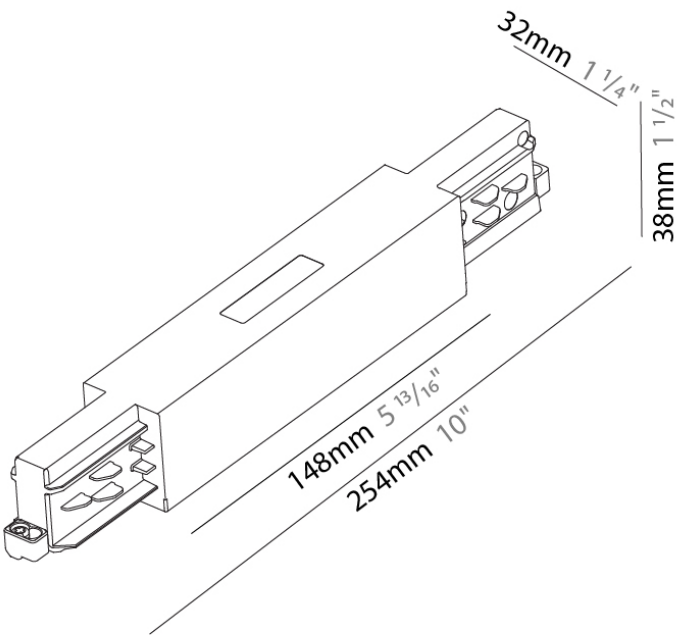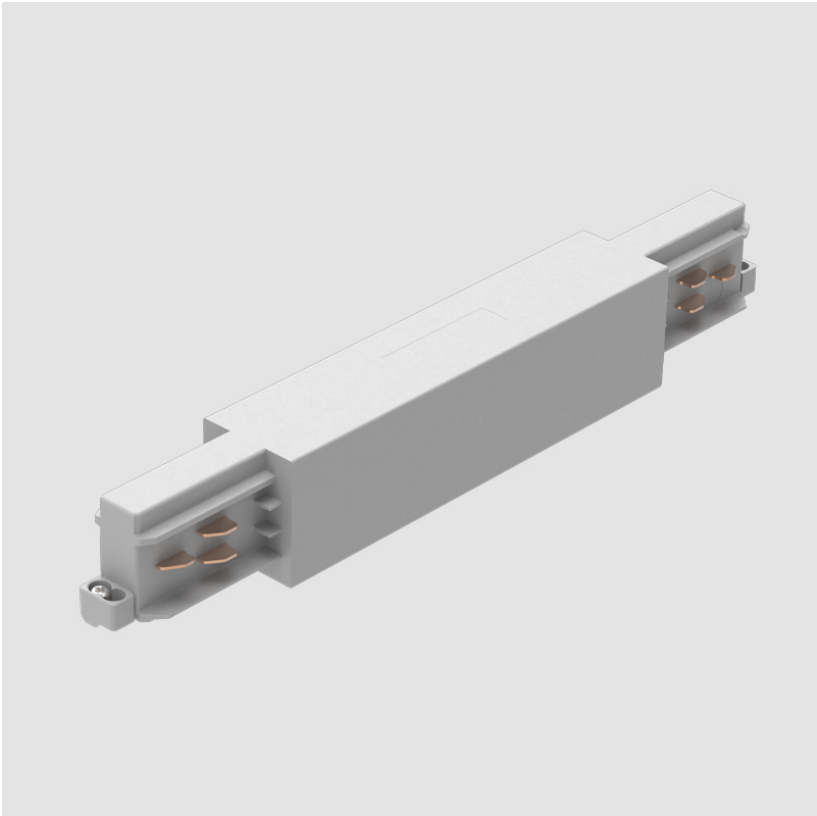

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR2100-

DESCRIPTION

Track - Straight Connector -

GENERAL



Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 115  
Length (in): 4 1/2  
Width (mm): 26  
Width (in): 1  
Height (mm): 33  
Height (in): 1 5/16  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

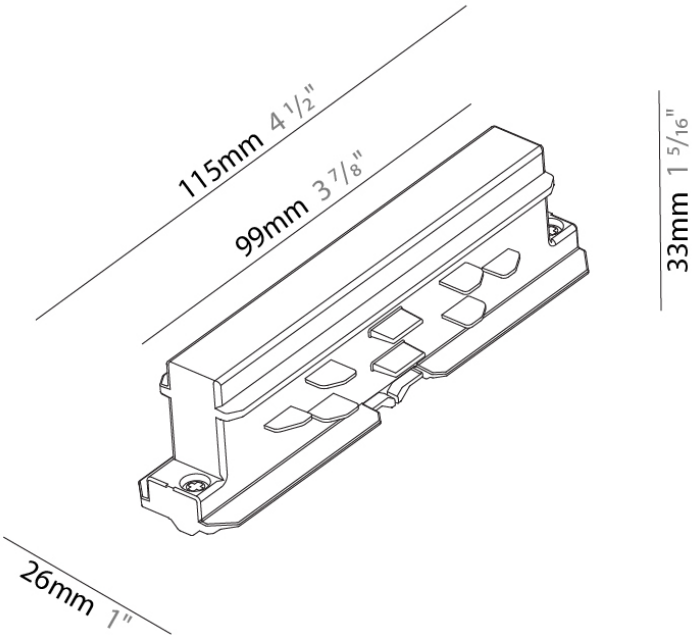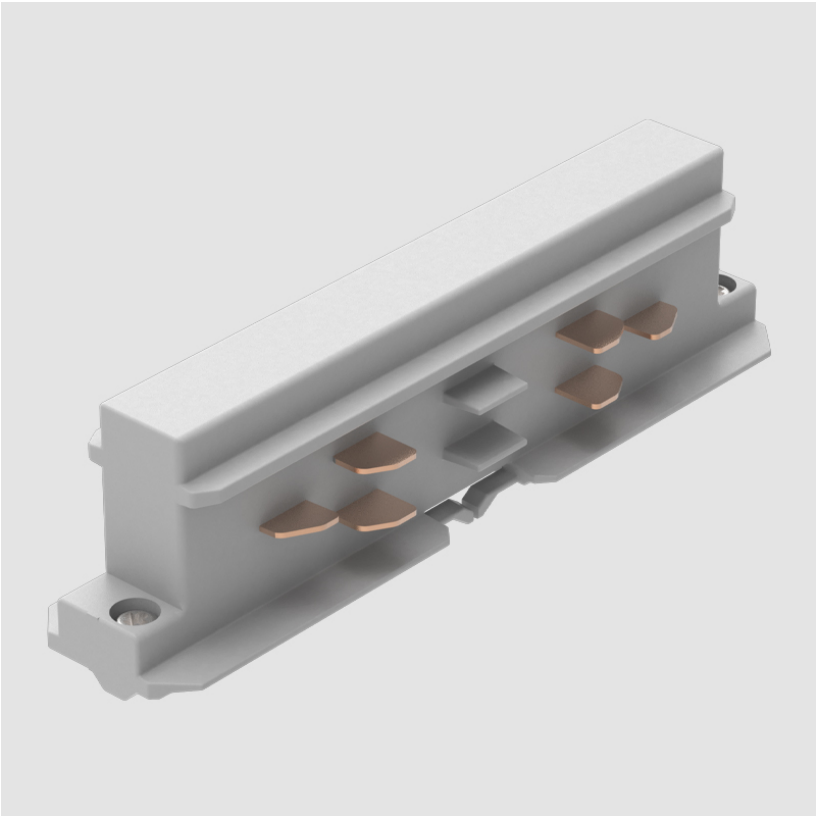

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR2300-

DESCRIPTION

Track - Flexible Connector -

GENERAL



Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 370  
Length (in): 14 9/16  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

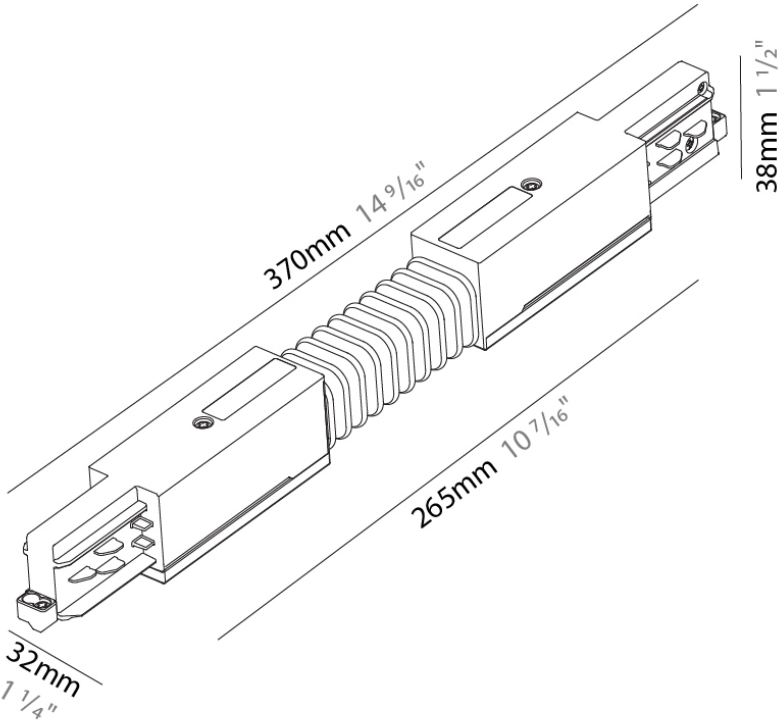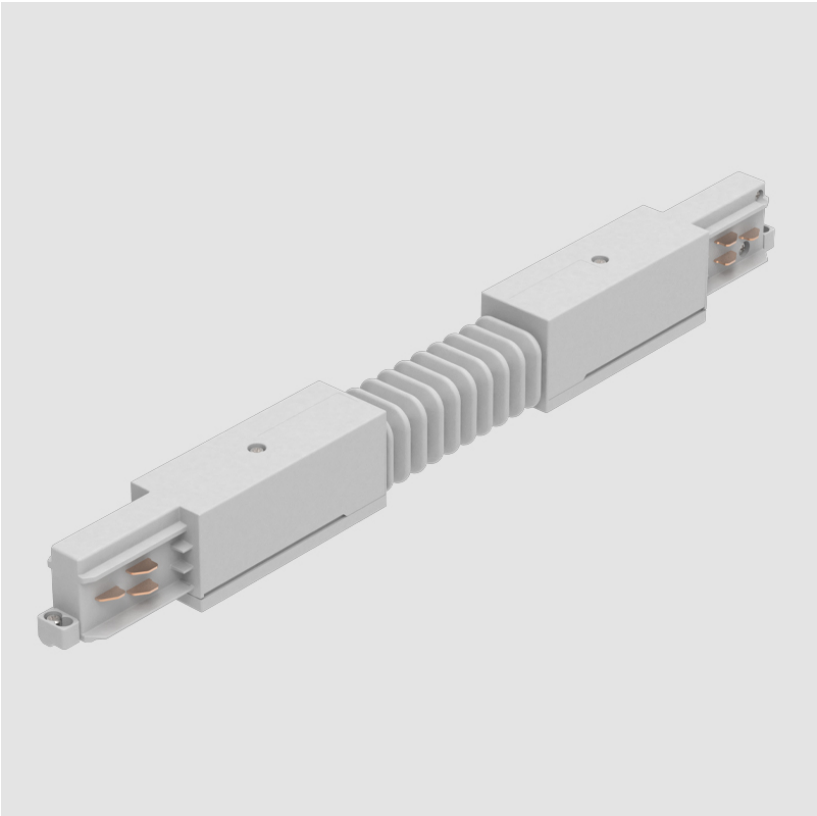

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR3400-

DESCRIPTION

Track - L-Connector, Outside Corner (Feedable) -

GENERAL



Brand: Prolicht
Division: Architectural
Mounting Type: Track

PHYSICAL

Length (mm): 143
Length (in): 5 5/8
Width (mm): 32
Width (in): 1 1/4
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / GRY
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

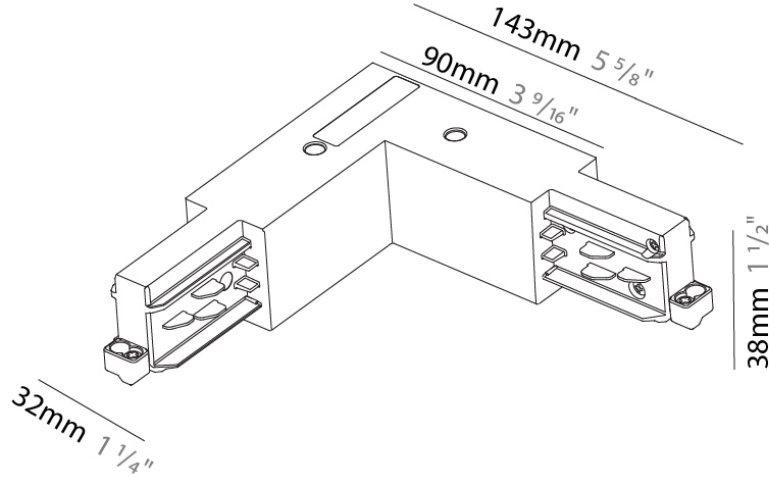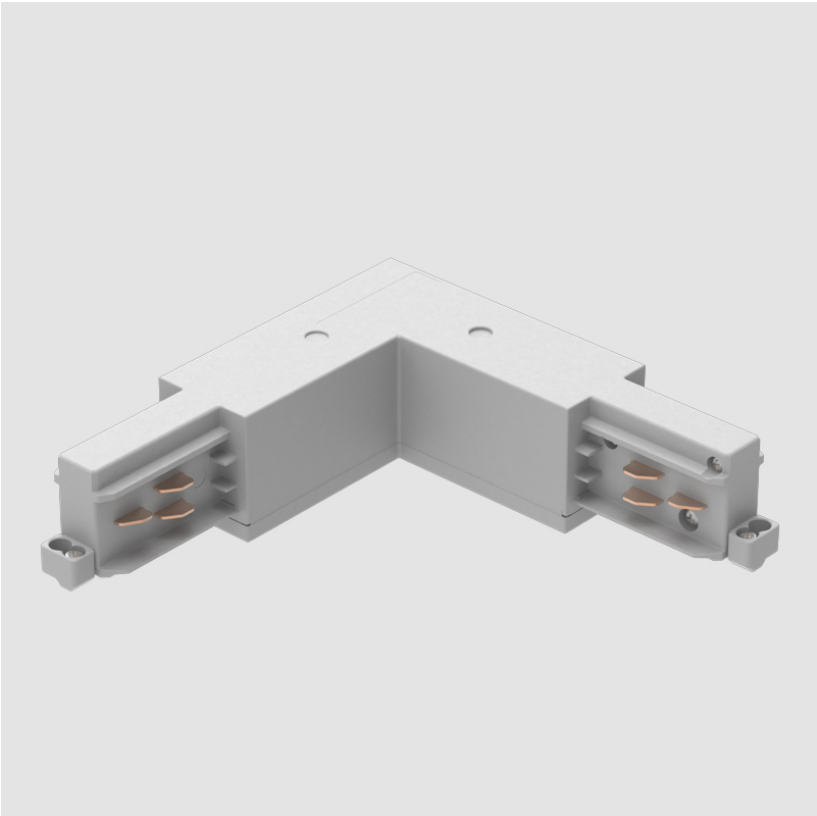

A3T115- COMPONENTS TRACK

STR3500-

DESCRIPTION

Track - 3-Circuit L-Connector, Inside Corner (Feedable)

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track



PHYSICAL

Length (mm): 143  
Length (in): 5 5/8  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

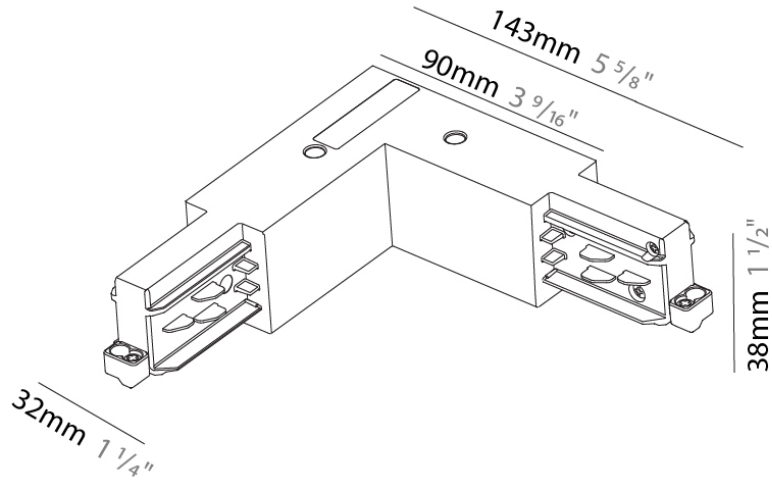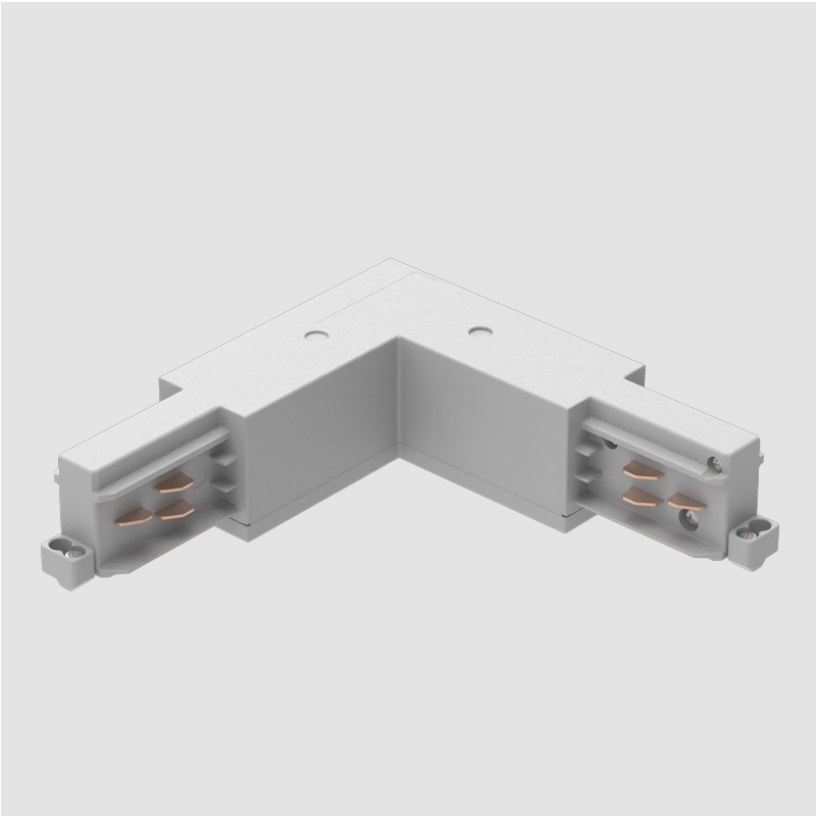

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR380-

DESCRIPTION

Track - X-Connector (Feedable) -

GENERAL



Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 148  
Length (in): 5 13/16  
Width (mm): 148  
Width (in): 5 13/16  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

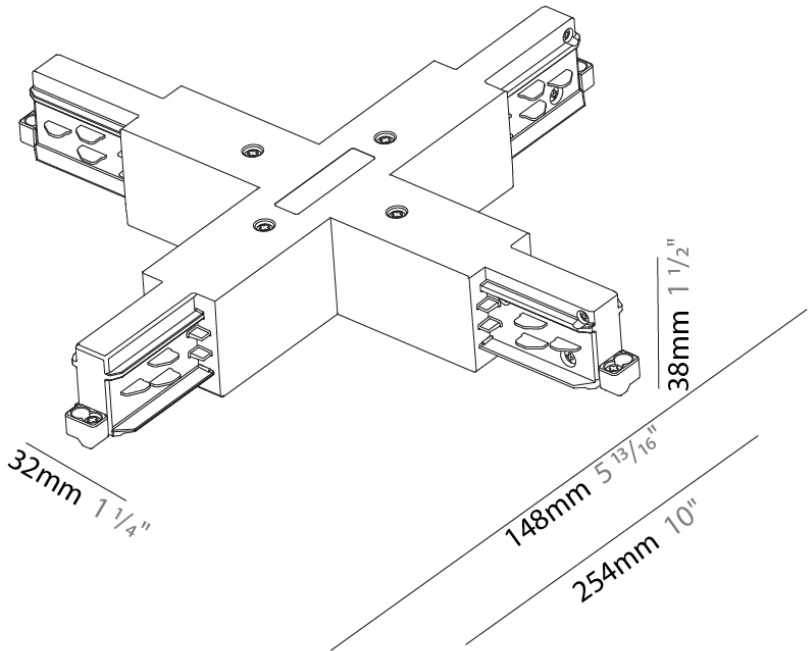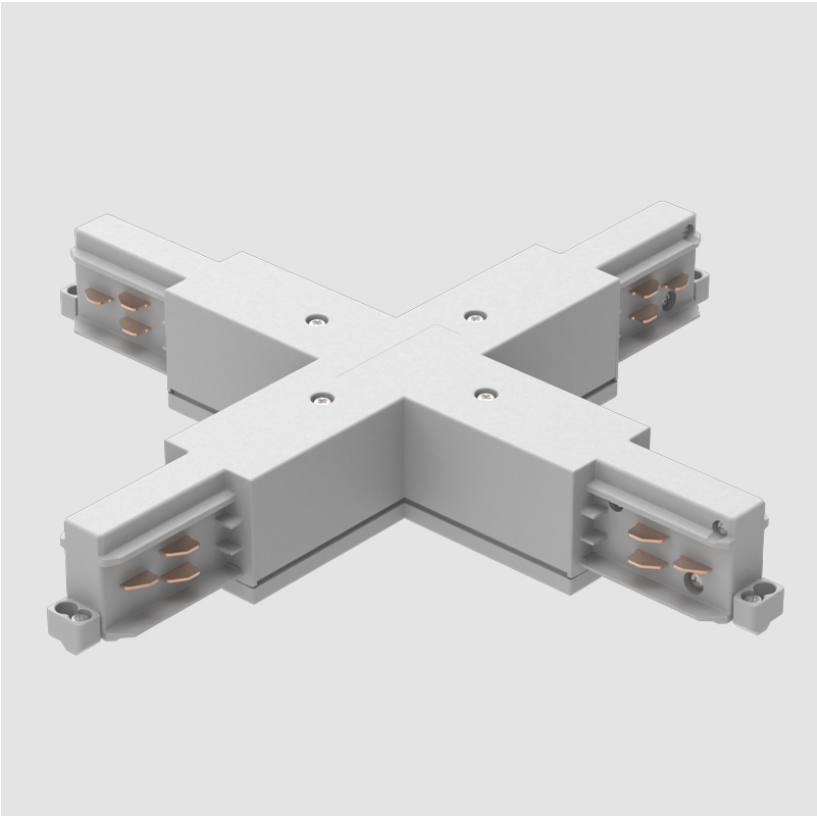

A3T115- COMPONENTS TRACK

STR3900-

DESCRIPTION

Track - T-Connector, Inside (Feedable) -

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track



PHYSICAL

Length (mm): 254  
Length (in): 10  
Width (mm): 143  
Width (in): 5 13/16  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

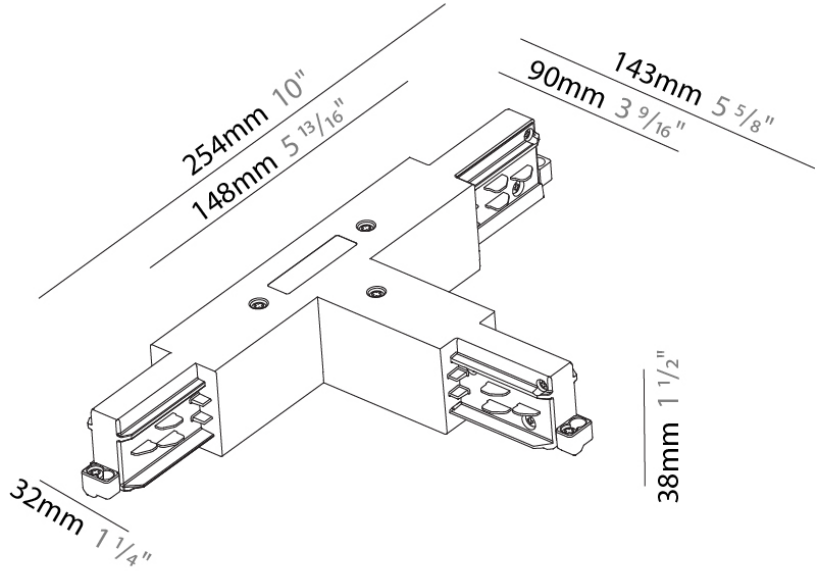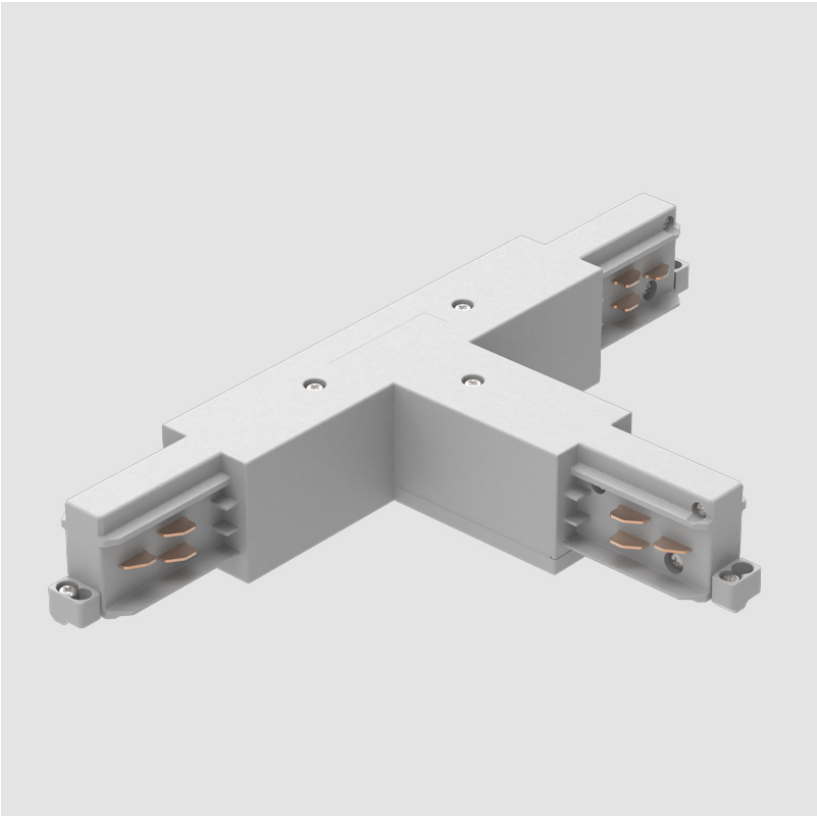

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR40001-

DESCRIPTION

Track - T-Connector, Outside (Feedable) -

GENERAL



Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 254  
Length (in): 10  
Width (mm): 143  
Width (in): 5 5/8  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

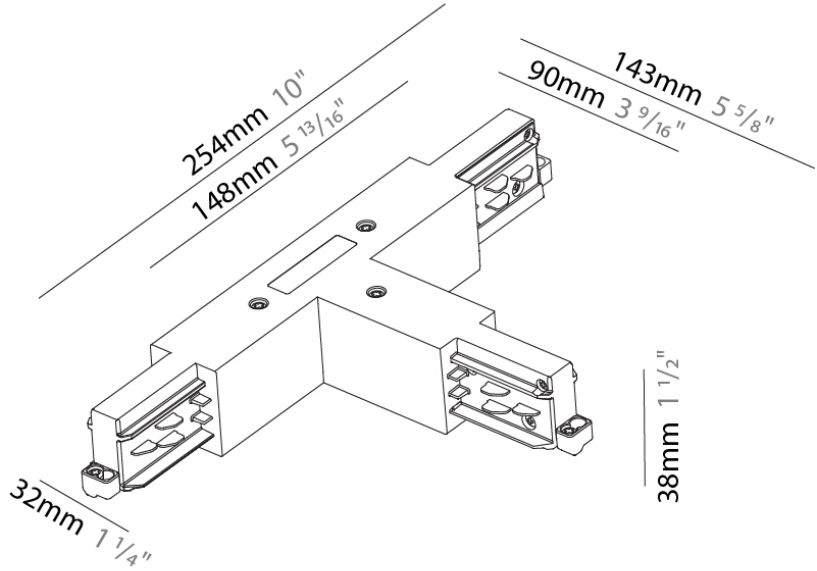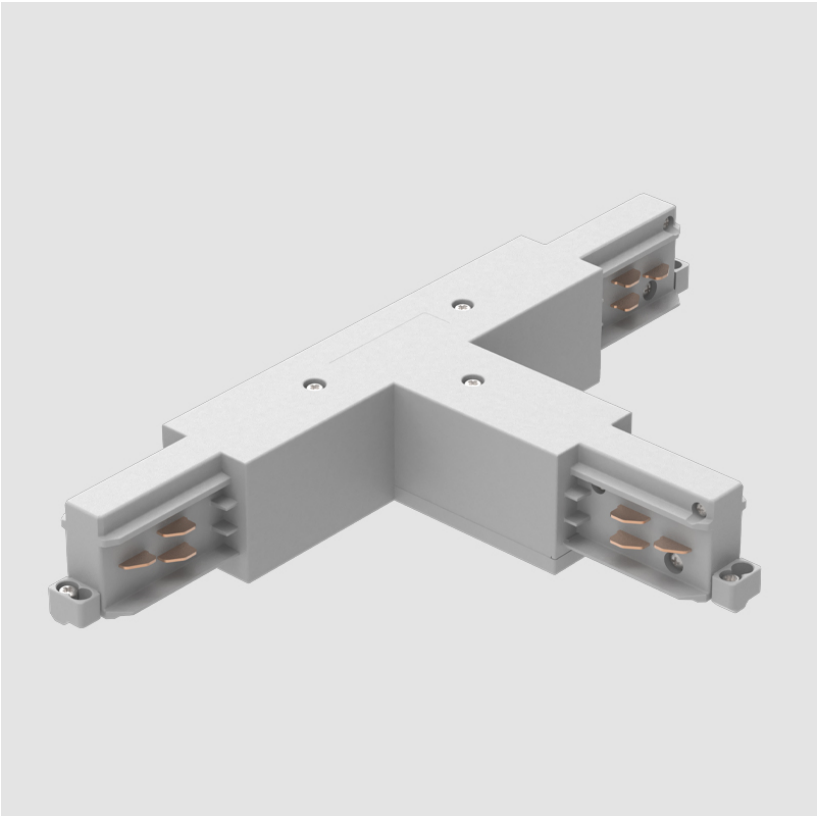

A3T115- COMPONENTS SURFACE

STR4100-

DESCRIPTION

Track - Surface - End Cap -

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface



PHYSICAL

Length (mm): 32  
Length (in): 1 ¼  
Width (mm): 32  
Width (in): 1 ¼  
Height (mm): 38  
Height (in): 1 ½  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

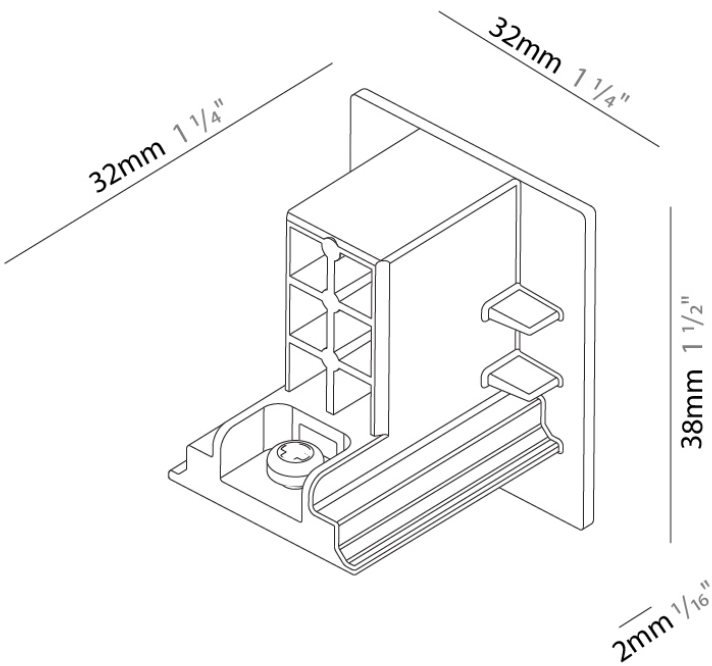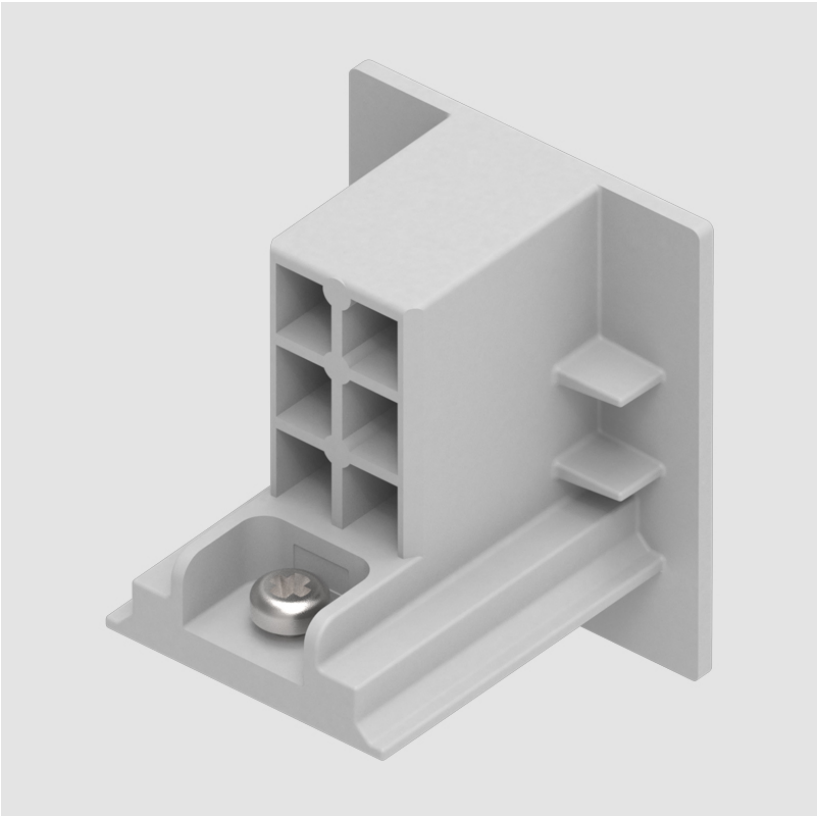

A3T115- COMPONENTS TRACK

STR510-

DESCRIPTION

Track - Suspension Cable Kit 3000mm -

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track


PHYSICAL

Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

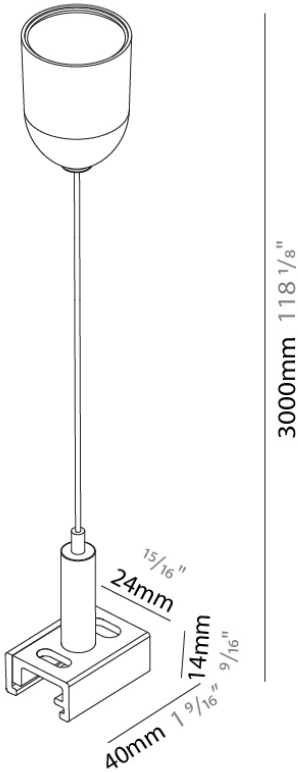

A3T115- COMPONENTS TRACK

STR512-

DESCRIPTION

Track - Ceiling Mounting Bracket

GENERAL

Brand: Prolight  
Division: Architectural  
Mounting Type: Track


PHYSICAL

Length (mm): 40  
Length (in): 1 9/16  
Width (mm): 24  
Width (in): 15/16  
Height (mm): 14  
Height (in): 9/16  
Fixture Finish: WHI / BLK  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

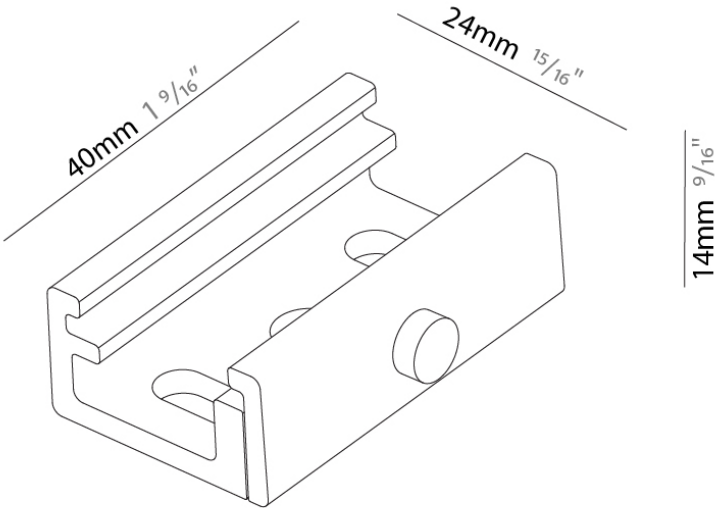

A3T115- COMPONENTS TRACK

STR521-

DESCRIPTION

Track - Stem and canopy kit 1000mm

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track


PHYSICAL

Fixture Finish: WHI / BLK  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

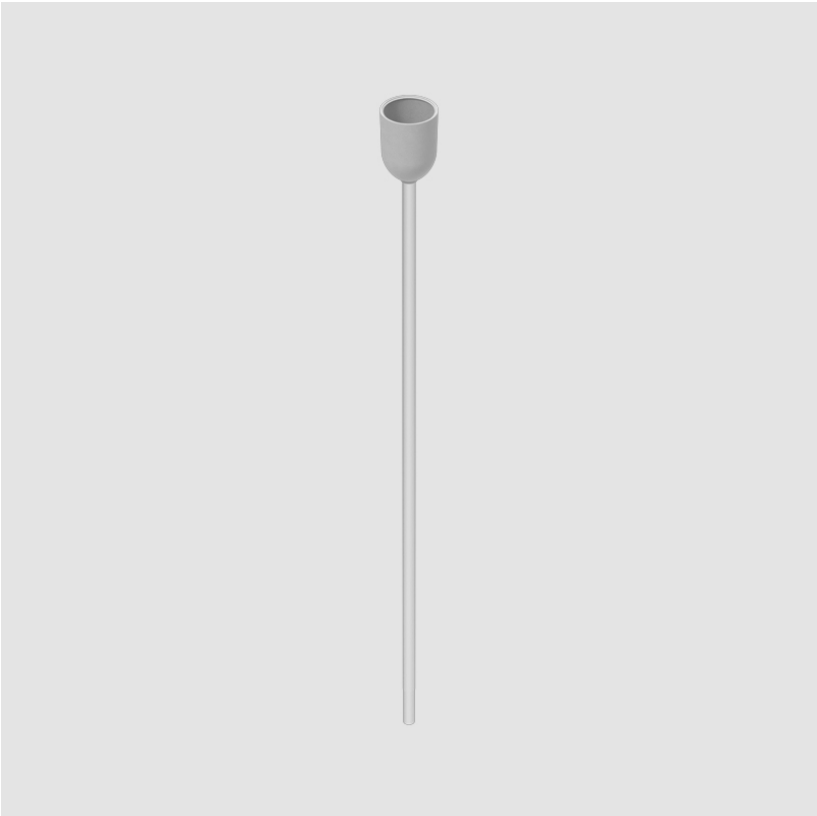

A3T115- COMPONENTS TRACK

STR9001R-

DESCRIPTION

Track - Cover End Power Supply

GENERAL

Brand: Prolicht

Division: Architectural

Mounting Type: Track

PHYSICAL

Length (mm): 95

Length (in): 3 3/4

Width (mm): 52

Width (in): 2 1/16

Height (mm): 34

Height (in): 1 5/16

Fixture Finish: WHI / BLK / GRY

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

IP rating: IP20


PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

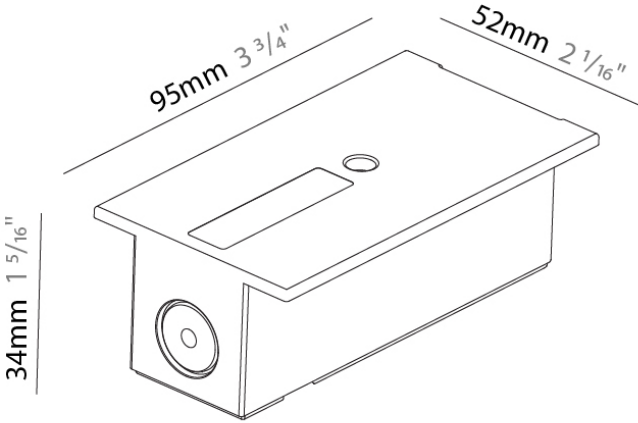

A3T115- COMPONENTS TRACK

STR9010R-

DESCRIPTION

Track - Cover Mid Power Supply



GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 148  
Length (in): 5 13/16  
Width (mm): 52  
Width (in): 2 1/16  
Height (mm): 34  
Height (in): 1 5/16  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

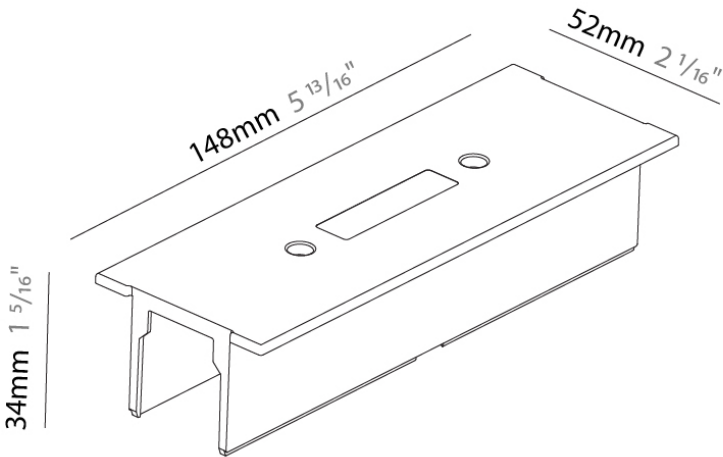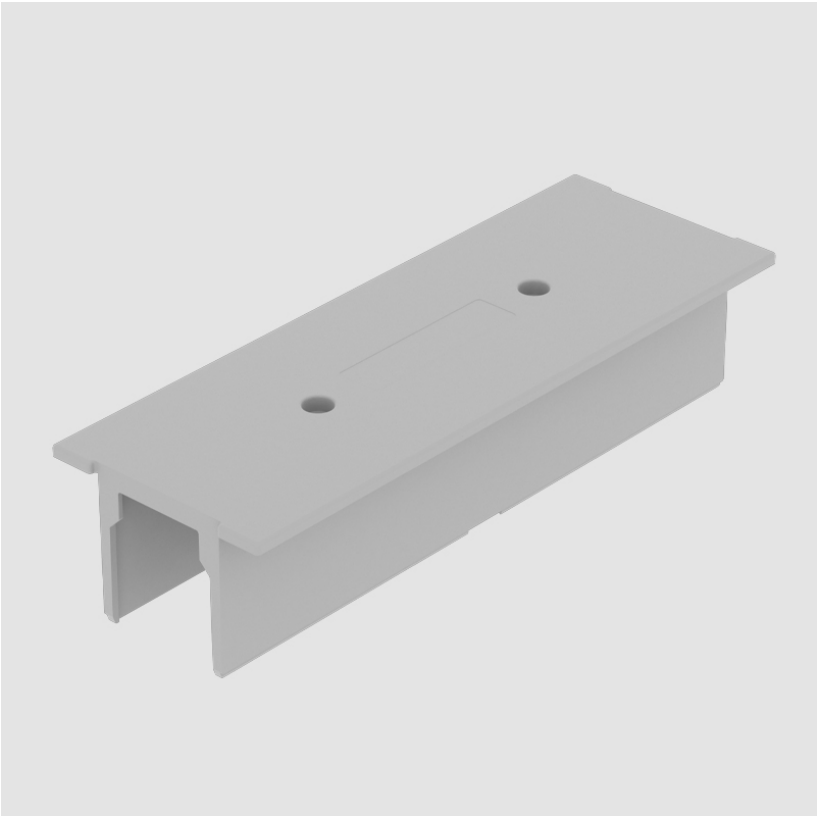

A3T115- COMPONENTS TRACK

STR9011R-

DESCRIPTION

Track - Cover Corner Connector


GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 100  
Length (in): 3 15/16  
Width (mm): 100  
Width (in): 3 15/16  
Height (mm): 34  
Height (in): 1 5/16  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

PROJECT
TYPE
NOTES
QUANTITY
DATE

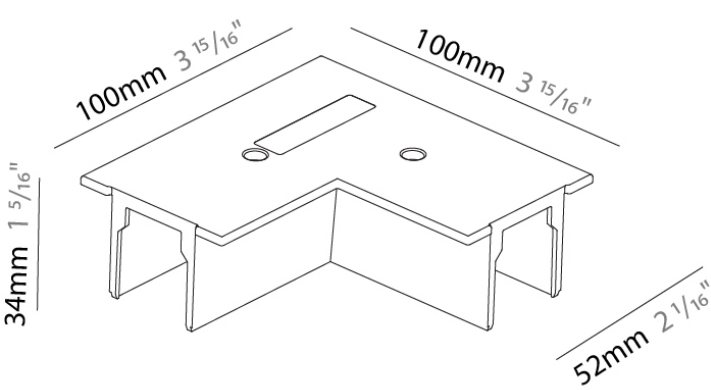

A3T115- COMPONENTS TRACK

STR9013R-

DESCRIPTION

Track - Cover T-Connector

GENERAL

Brand: Prolicht

Division: Architectural

Mounting Type: Track

PHYSICAL

Length (mm): 148

Length (in): 5 13/16

Width (mm): 100



Width (in): 3 15/16

Height (mm): 34

Height (in): 1 5/16

Fixture Finish: WHI / BLK / GRY

Fixture Material: Aluminum

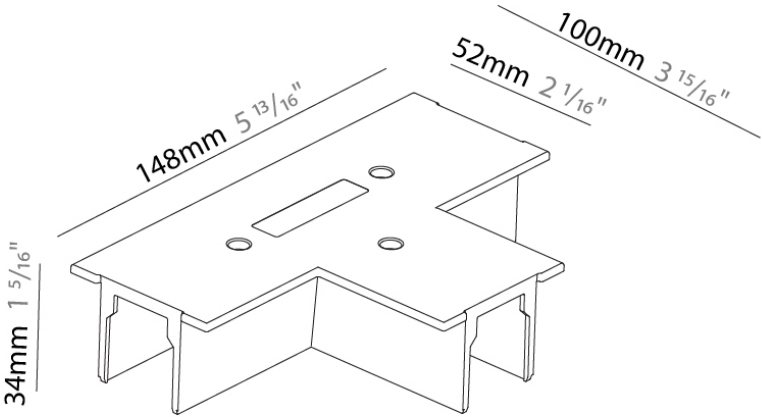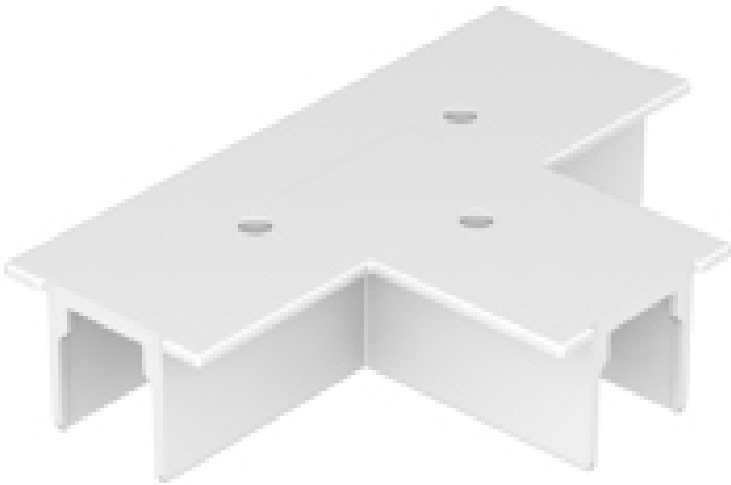

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STR9017R-

DESCRIPTION



Track - Cover Cross Connector

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 148  
Length (in): 5 13/16  
Width (mm): 148  
Width (in): 5 13/16  
Height (mm): 34  
Height (in): 1 5/16  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

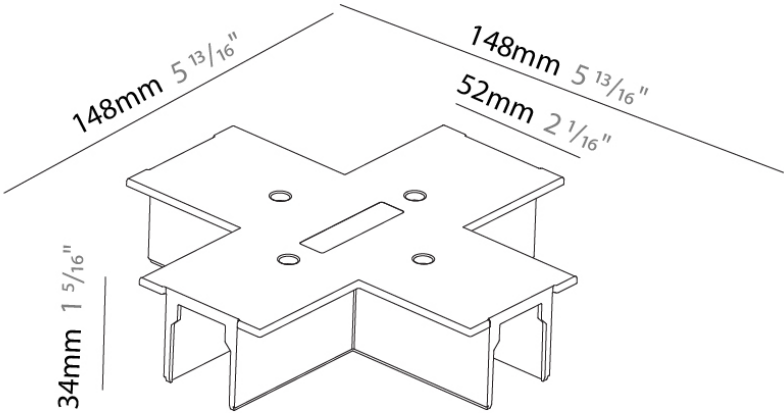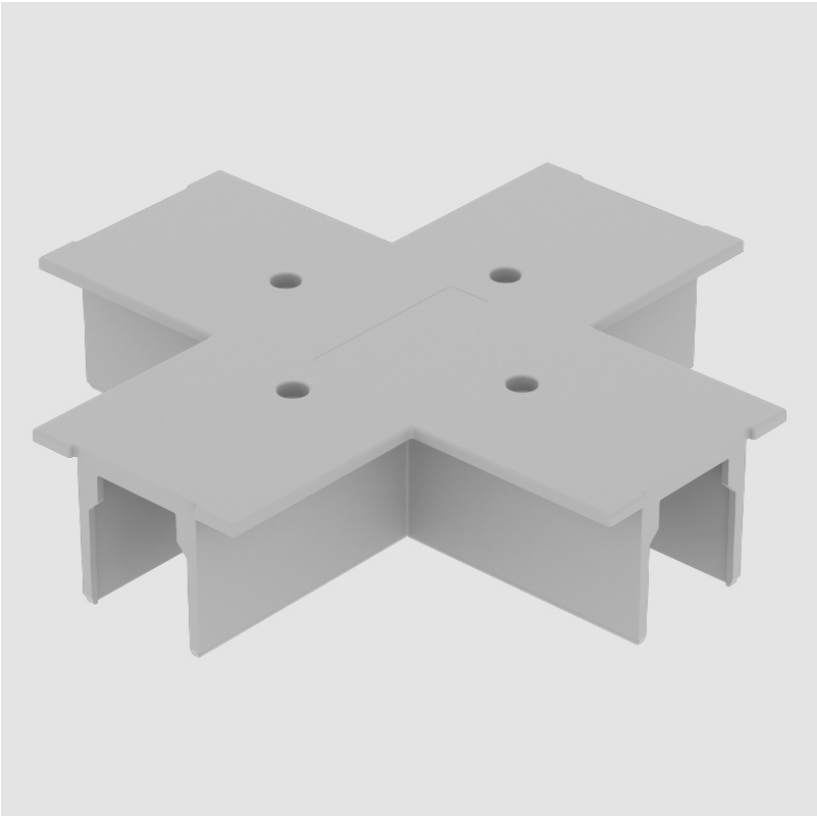

A3T115- COMPONENTS SURFACE

STRR4100-

DESCRIPTION

Track - Recessed - End Cap -

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface



PHYSICAL

Length (mm): 32  
Length (in): 1 ¼  
Width (mm): 32  
Width (in): 1 ¼  
Height (mm): 38  
Height (in): 1 ½  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

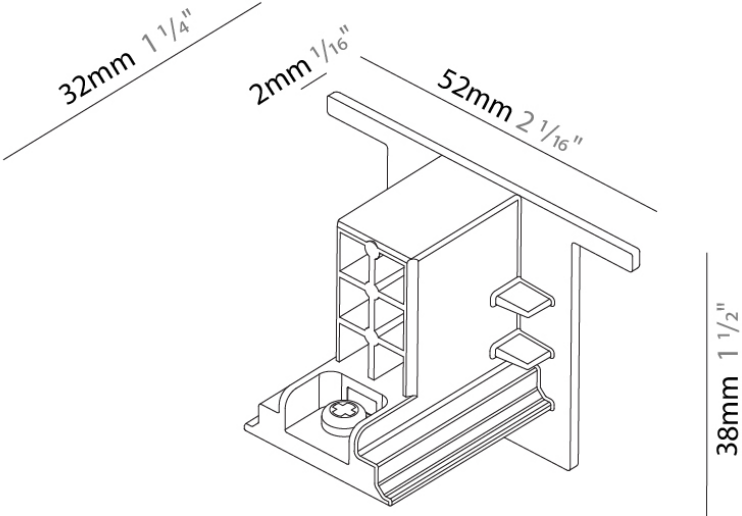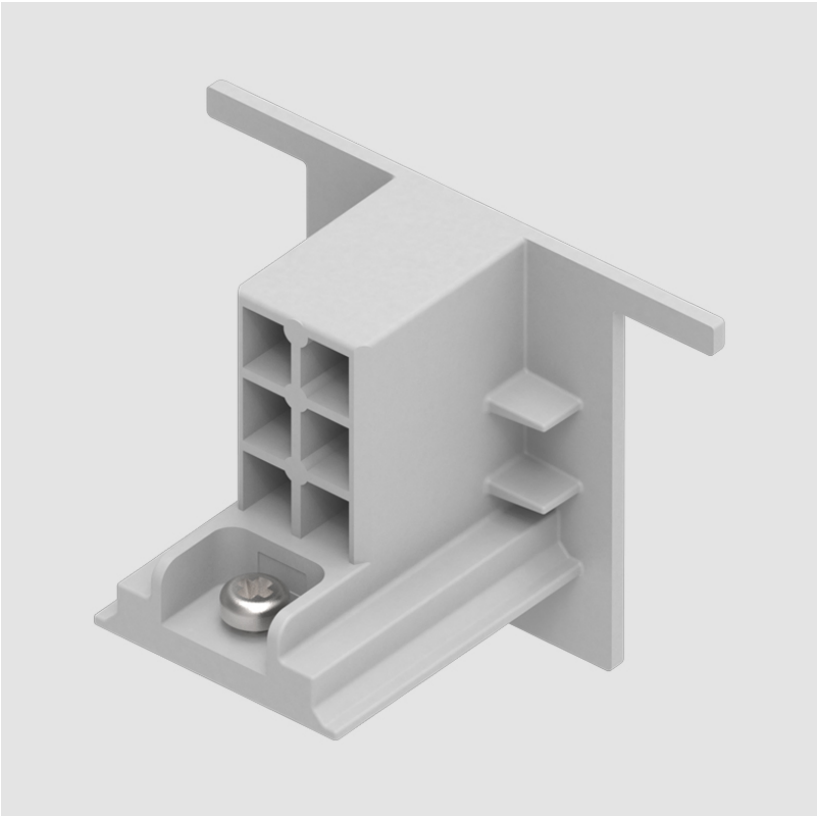

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STRR4400-

DESCRIPTION

Track - 4' Recessed Mount 3-Circuit Track - Gray

GENERAL


Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Shape: Rectangle  
Length (mm): 1219  
Length (in): 48  
Width (mm): 32  
Width (in): 1 ¼  
Height (mm): 38  
Height (in): 1 ½  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

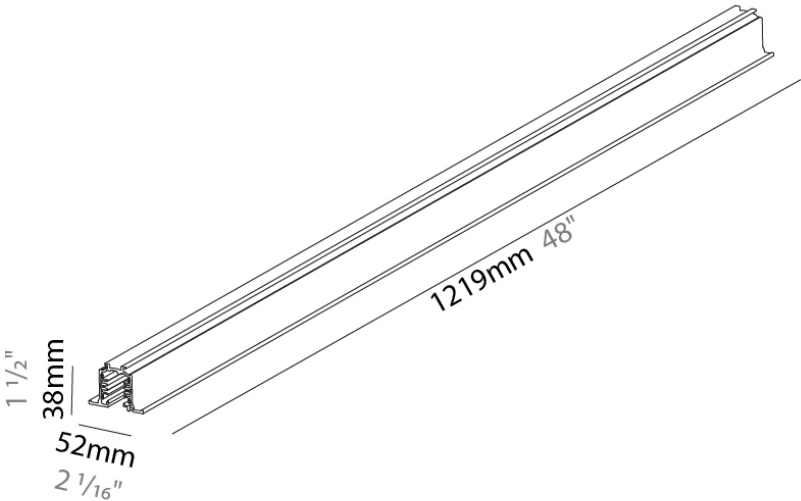

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STRR4800-

DESCRIPTION

Track - 8' Recessed Mount 3-Circuit Track - Gray

GENERAL


Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Shape: Rectangle  
Length (mm): 2438  
Length (in): 96  
Width (mm): 32  
Width (in): 1 ¼  
Height (mm): 38  
Height (in): 1 ½  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

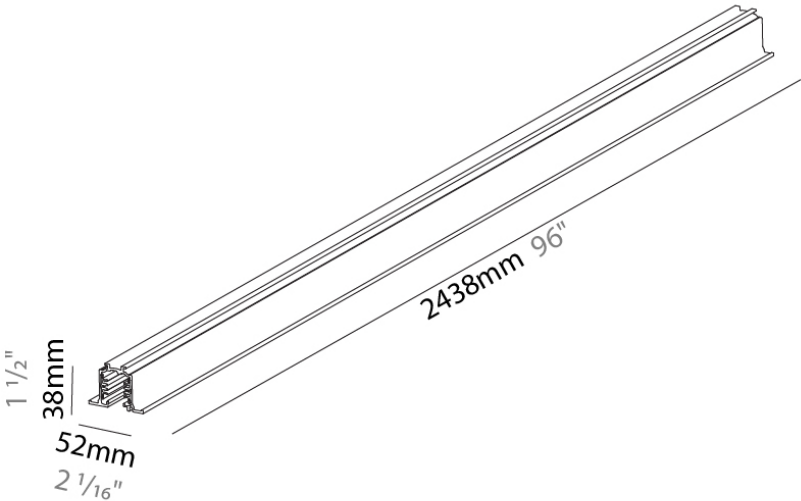

A3T115- COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STRS4400-

DESCRIPTION

Track - 4' Surface Mount 3-Circuit Track

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL


Shape: Rectangle  
Length (mm): 1219  
Length (in): 48  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

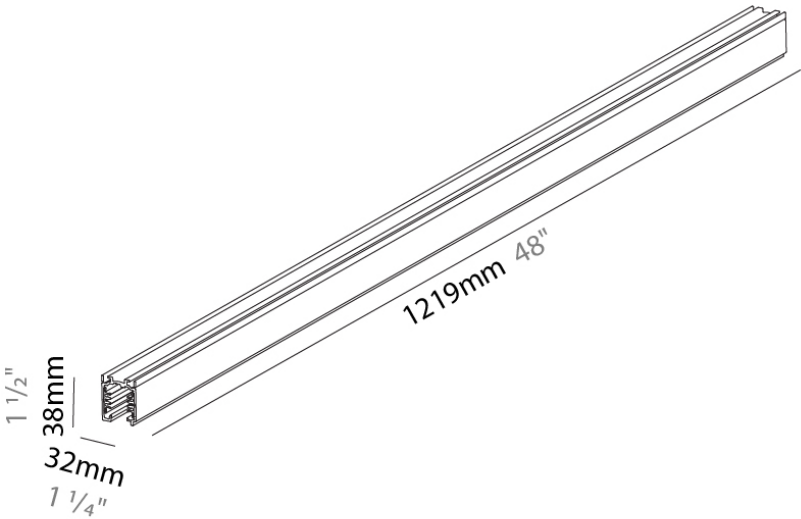

A3T115- COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STRS4800-

DESCRIPTION

Track - 8' Surface Mount 3-Circuit Track

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL



Shape: Rectangle  
Length (mm): 2438  
Length (in): 96"  
Width (mm): 32  
Width (in): 1 1/4"  
Height (mm): 38  
Height (in): 1 1/2"  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

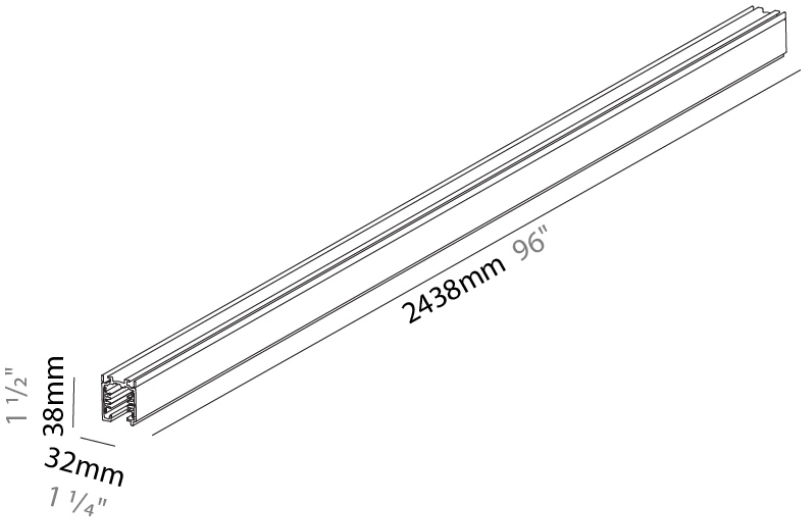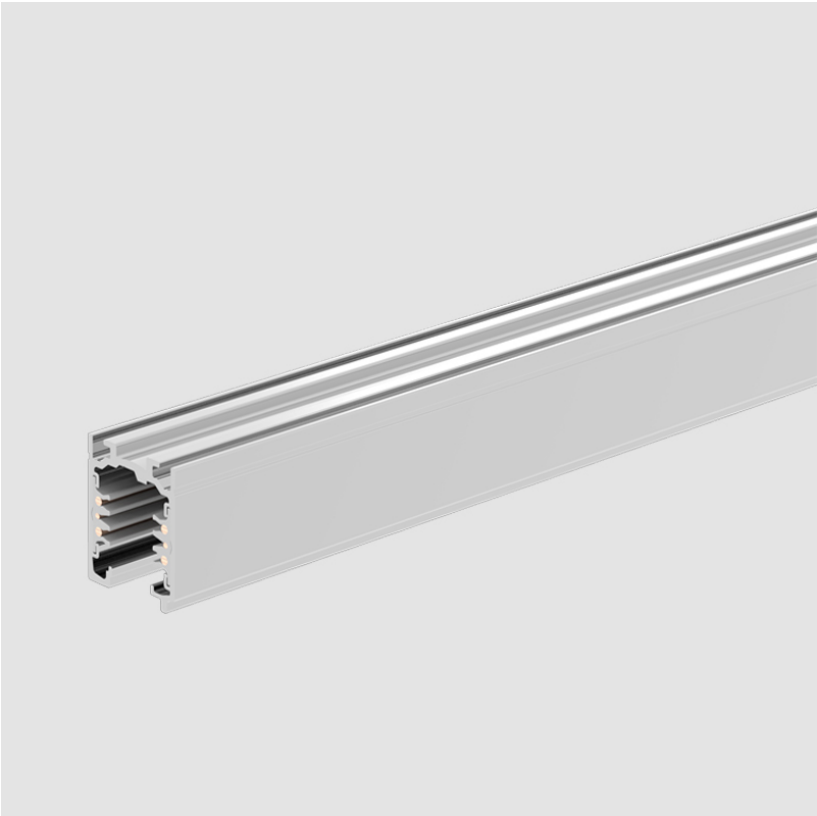

A3T115- COMPONENTS TRACK

STRV120

DESCRIPTION

Cutting Tool for Track Conductors

GENERAL

Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Length (mm): 245  
Length (in): 9 5/8  
Height (mm): 58  
Height (in): 2 5/16  
Fixture Material: Aluminum


ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

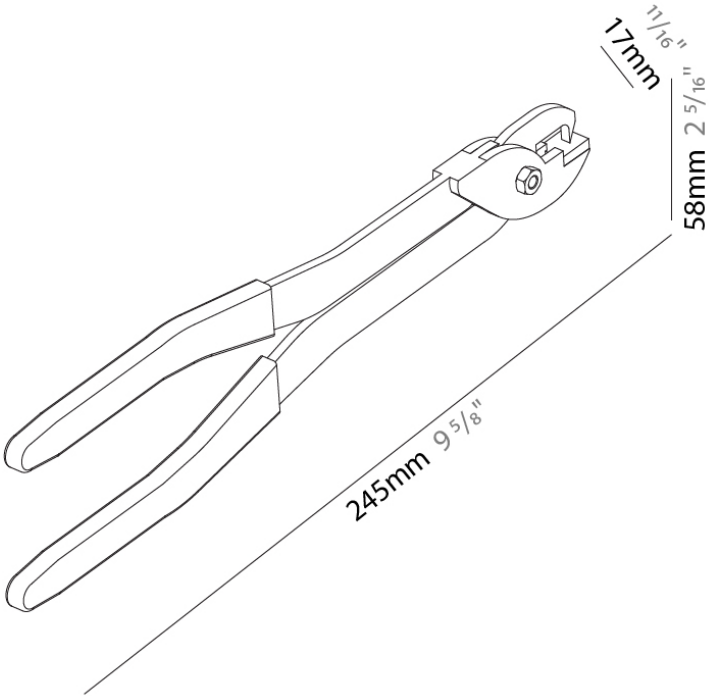

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)