

D8LAD-MOD-SYS COMPONENTS SUSPENSION

D81503-

DESCRIPTION

Emma - Suspension - 260mm / 10 1/4" - 1 x 7W Retrofit LED / 15W CFL - E26 - Canopy required (sold separately)

GENERAL

Series: Ladies  
Subseries: Emma  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

PHYSICAL


Shape: Abstract  
Diameter (mm): 260  
Diameter (in): 10 1/4  
Height (mm): 185  
Height (in): 7 5/16  
Max. Overall Height (mm): 2385  
Max. Overall Height (in): 93 7/8  
Light Distribution: Direct  
Weight (kg): 1.40  
Weight (lbs): 3.08  
Installation Requirement: Holder required - Sold Separately  
Diffuser: Glass - See Finish Options  
Fixture Finish: CRY / STE / AMB / BRZ / TOB / GRN / WHI  
Holder Finish: BLK / MBR  
Fixture Material: Glass / Aluminum  
Cable Details: 2200mm / 86 5/8" Transparent Cable

ELECTRICAL

Number of Lamps: 1  
Lamp Type: LED Retrofit / CFL  
Bulb Included: Bulb Not Included  
Max. Wattage Per Lamp (W): 7 / 15  
Lamp Base: E26  
Input Voltage (V): 120  
Upon Request: 277Vac / GU24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

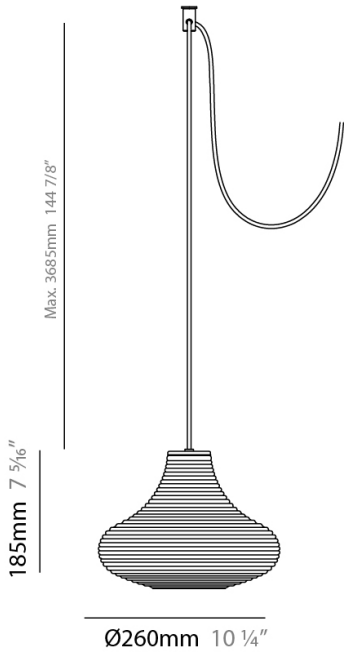

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D81508-

DESCRIPTION

Clio - Suspension - 85mm / 3 3/8" - 1 x 7W LED Retrofit - E26 - 120Vac - Canopy required (sold separately)

GENERAL

Series: Ladies  
Subseries: Clio  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

PHYSICAL


Shape: Cylinder  
Diameter (mm): 85  
Diameter (in): 3 3/8  
Height (mm): 310  
Height (in): 12 3/16  
Max. Overall Height (mm): 3810  
Max. Overall Height (in): 150  
Light Distribution: Direct  
Weight (kg): 1.15  
Weight (lbs): 2.53  
Diffuser: Glass - See Finish Options  
Fixture Finish: CRY / STE / AMB / BRZ / TOB / GRN / WHI  
Holder Finish: BLK / MBR  
Fixture Material: Glass / Aluminum  
Cable Details: 2200mm / 86 5/8" Transparent Cable

ELECTRICAL

Number of Lamps: 1  
Lamp Type: LED Retrofit  
Bulb Included: Bulb Not Included  
Max. Wattage Per Lamp (W): 7  
Lamp Base: E26  
Input Voltage (V): 120  
Lamp Voltage (V): 120  
Upon Request: 277Vac / GU24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

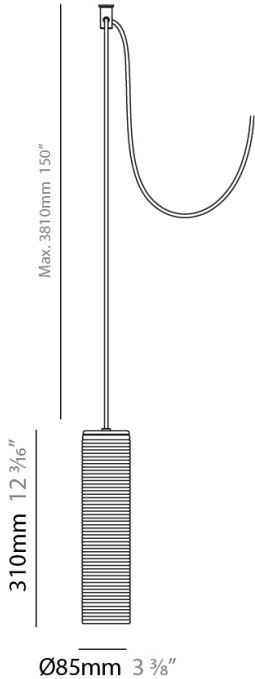

D8LAD-MOD-SYS COMPONENTS SUSPENSION

PROJECT
TYPE
NOTES
QUANTITY
DATE

D81583-

DESCRIPTION

Olivia - Suspension - 130mm / 5 1/8" - 1 x Max. 7W LED Retrofit - E26 - A19 - Canopy required (sold separately)

GENERAL

Series: Ladies  
Subseries: Olivia  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

PHYSICAL


Shape: Abstract  
Diameter (mm): 130  
Diameter (in): 5 1/8  
Height (mm): 274  
Height (in): 10 13/16  
Max. Overall Height (mm): 3774  
Max. Overall Height (in): 148 9/16  
Light Distribution: Direct  
Weight (kg): 1.04  
Weight (lbs): 2.29  
Diffuser: Glass - See Finish Options  
Fixture Finish: CRY / STE / AMB / BRZ / TOB / GRN / WHI  
Holder Finish: BLK / MBR  
Fixture Material: Glass / Aluminum  
Cable Details: 2200mm / 86 5/8" Transparent Cable

ELECTRICAL

Number of Lamps: 1  
Lamp Type: LED Retrofit  
Lamp Shape: A19  
Bulb Included: Bulb Not Included  
Max. Wattage Per Lamp (W): 7  
Lamp Base: E26  
Input Voltage (V): 120  
Upon Request: 277Vac / GU24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

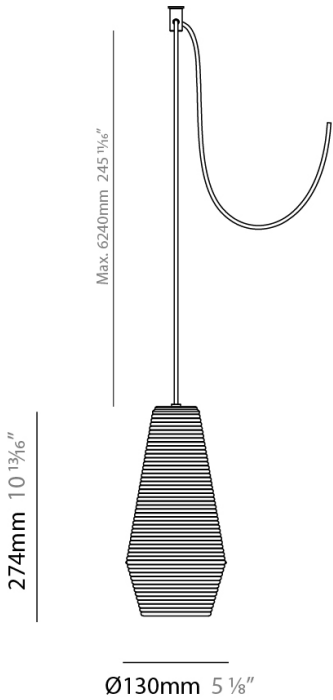

D8LAD-MOD-SYS COMPONENTS SURFACE

D89044-

DESCRIPTION

9 Light Holder - 210mm / 8 1/4" x 40mm / 1 9/16"

GENERAL

Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Ceiling




PHYSICAL

Diameter (mm): 210  
Height (mm): 40  
Fixture Finish: BLK / MBR

ELECTRICAL

Input Voltage (V): 120

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

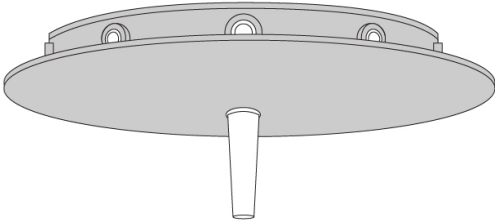

D8LAD-MOD-SYS COMPONENTS

D89078

DESCRIPTION

Ladies Accessory - Polycarbonate hook for suspension

GENERAL

Series: Ladies

Brand: Panzeri

Division: Design

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



Ø20mm 13/16"



32mm 1 1/4"

D8LAD-MOD-SYS COMPONENTS

D89079

DESCRIPTION

Surface - 7 Light Canopy - 395mm / 15 4/7" - White

GENERAL

Brand: Panzeri  
Division: Design



PHYSICAL

Shape: Round  
Diameter (mm): 395  
Diameter (in): 15 4/7  
Height (mm): 25  
Height (in): 1  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 7  
Lamp Type: LED Retrofit / Halogen  
Bulb Included: Bulb Not Included  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120

PROJECT
TYPE
NOTES
QUANTITY
DATE

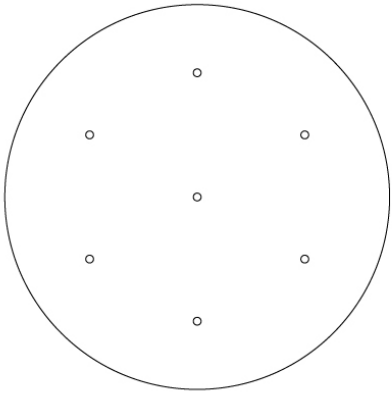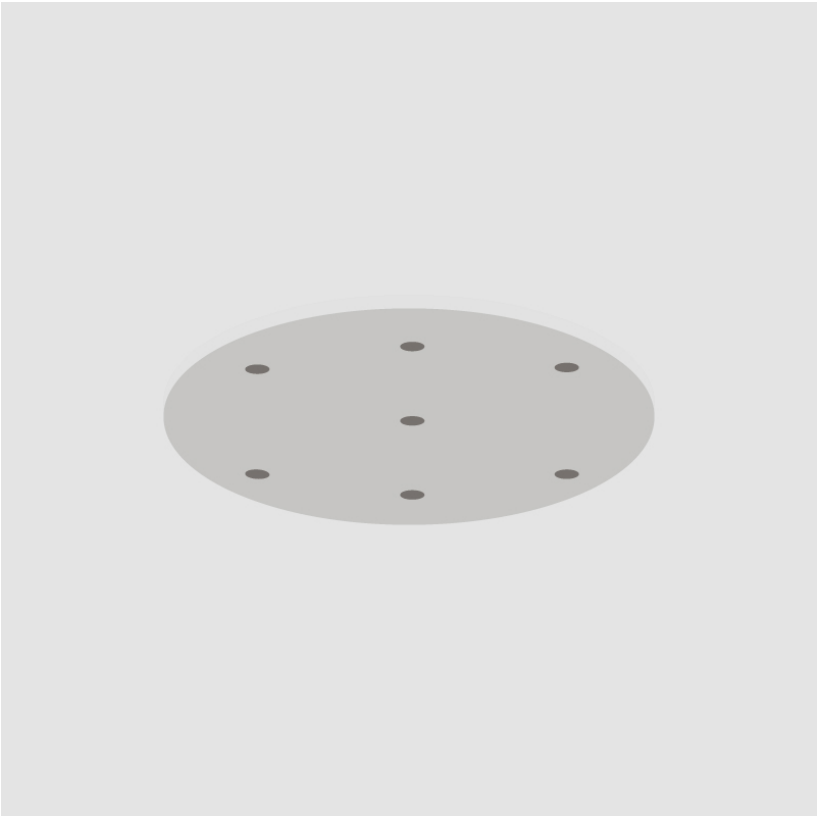

Ø395mm 15 4/7"

D8LAD-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

D89091

DESCRIPTION

Surface - 3 Light Canopy - 420mm / 16 1/2" x 65mm / 2 1/2" - White

GENERAL



Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle  
Length (mm): 420  
Length (in): 16 1/2  
Width (mm): 65  
Width (in): 2 1/2  
Height (mm): 25  
Height (in): 1  
Weight (kg): 1.23  
Weight (lbs): 2.7  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 3  
Lamp Type: LED Retrofit / Halogen  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120



D8LAD-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

D89092

DESCRIPTION

Surface - 5 Light Canopy - 760mm / 30" x 65mm / 2 1/2" - White

GENERAL

Series: Girls
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Ceiling

PHYSICAL


Shape: Rectangle
Length (mm): 760
Length (in): 30
Width (mm): 65
Width (in): 2 1/2
Height (mm): 25
Height (in): 1
Weight (kg): 4.5 lbs / 2.04 kg
Fixture Finish: WHI
Fixture Material: Metal
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 5
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4 / 35
Input Voltage (V): 120

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

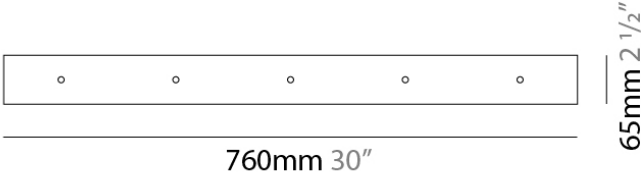



D8LAD-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

D89093

DESCRIPTION

Surface - 6 Light Canopy - 420mm / 16 1/2" x 250mm / 9 7/8" - White

GENERAL


Brand: Panzeri  
Division: Design

PHYSICAL

Shape: Rectangle  
Length (mm): 420  
Length (in): 16 1/2  
Width (mm): 250  
Width (in): 9 7/8  
Height (mm): 25  
Height (in): 1  
Weight (kg): 2.45  
Weight (lbs): 5.4  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 6  
Lamp Type: LED Retrofit / Halogen  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120

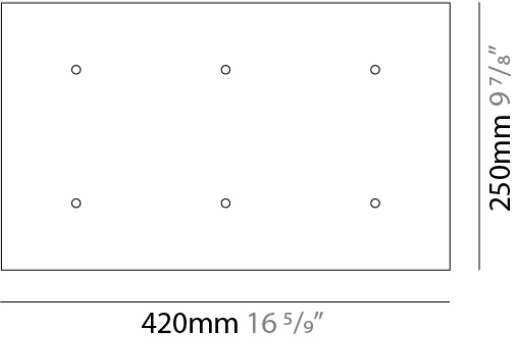

D8LAD-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

D89097

DESCRIPTION

Surface - 9 Light Canopy - 725mm / 16 5/9" x 420mm / 16 5/9" - White

GENERAL

Brand: Panzeri  
Division: Design

PHYSICAL



Shape: Rectangle  
Length (mm): 725  
Length (in): 28 4/7  
Width (mm): 420  
Width (in): 16 5/9  
Height (mm): 25  
Height (in): 1  
Weight (kg): 2.45  
Weight (lbs): 5.4  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 9  
Lamp Type: LED Retrofit / Halogen  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

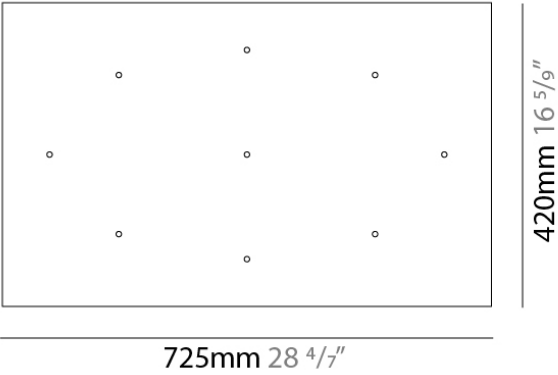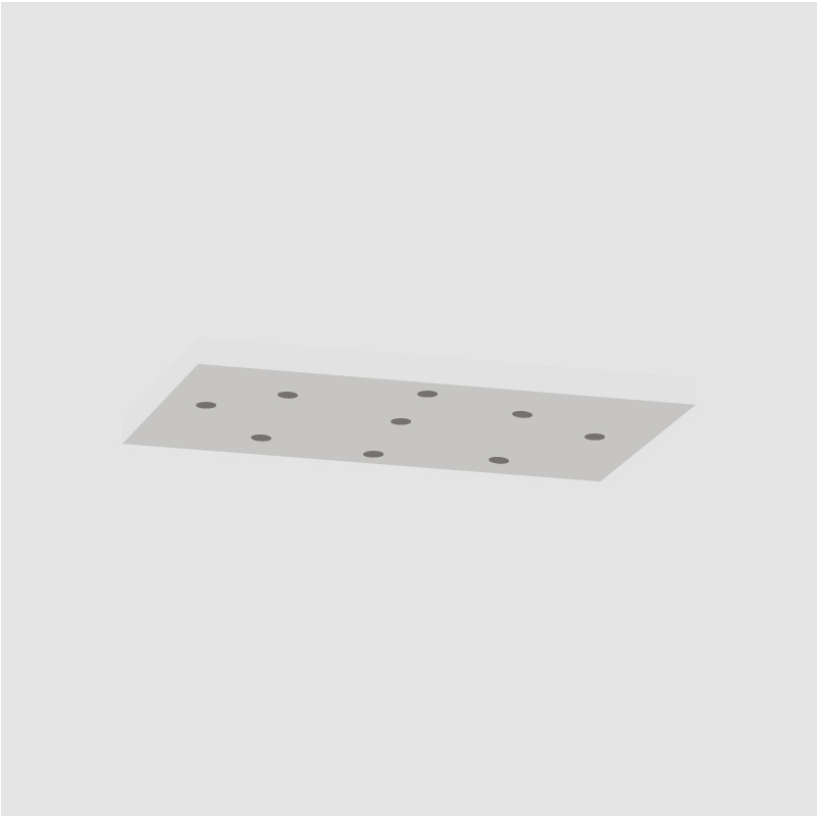

D8LAD-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

D89098

DESCRIPTION

Surface - 15 Light Canopy - 725mm / 28 4/7" x 420mm / 16 5/9" - White

GENERAL

Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Ceiling

PHYSICAL


Shape: Rectangle  
Length (mm): 725  
Length (in): 28 4/7  
Width (mm): 420  
Width (in): 16 5/9  
Height (mm): 25  
Height (in): 1  
Weight (kg): 2.45  
Weight (lbs): 5.4  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Number of Lamps: Max. 15  
Lamp Type: LED Retrofit / Halogen  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

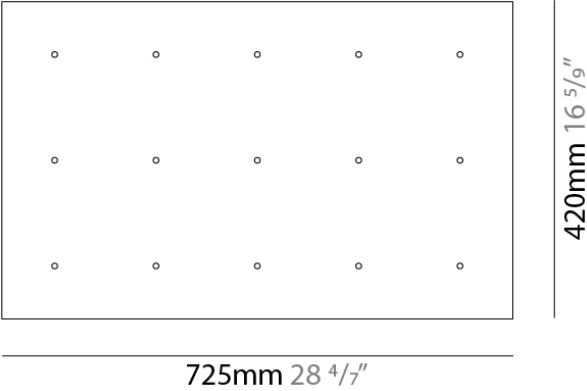

D8LAD-MOD-SYS COMPONENTS

D89099

DESCRIPTION

Surface - 3 Light Canopy - 395mm / 15 9/16" - White

GENERAL

Brand: Panzeri  
Division: Design

PHYSICAL

Shape: Round  
Diameter (mm): 395  
Diameter (in): 15 9/16  
Height (mm): 25  
Height (in): 1  
Weight (kg): 1.23  
Weight (lbs): 2.7  
Fixture Finish: WHI  
Fixture Material: Metal  
Upon Request: Custom Finishes - Black / Bronze / Matte Brass / Titanium



ELECTRICAL

Number of Lamps: Max. 3  
Lamp Type: LED Retrofit / Halogen  
Max. Wattage Per Lamp (W): 4 / 35  
Input Voltage (V): 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

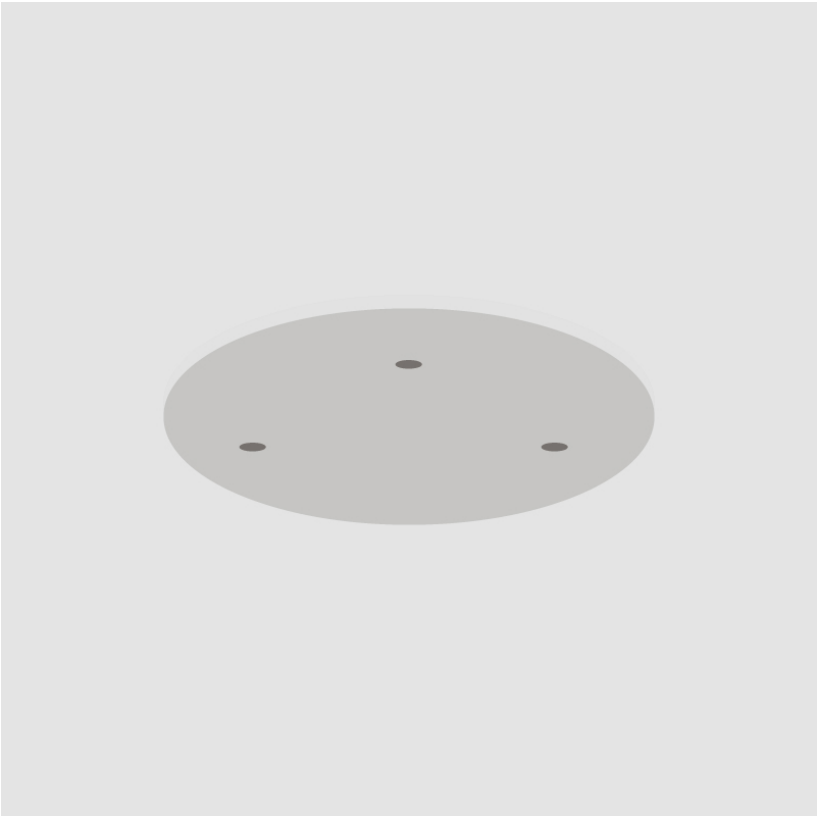






































































Ø395mm 15 4/7"













PROJECT
TYPE
NOTES
QUANTITY
DATE











LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)