

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81630R9-

DESCRIPTION

Zero Round - Suspension - 980mm / 38 3/5" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 980
Diameter (in): 38 3/5
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 1.43
Weight (lbs): 3.15
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 47
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: DP-Phase Dimming

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 4079 / 4079
CRI: >90 CRI
Efficiency (%): 82.45
Efficacy (lm/w): 109.93
Lamp Life (hrs): 60000
Upon Request: 3000K / 4000K


OPTICAL

Optic°: Diffused

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

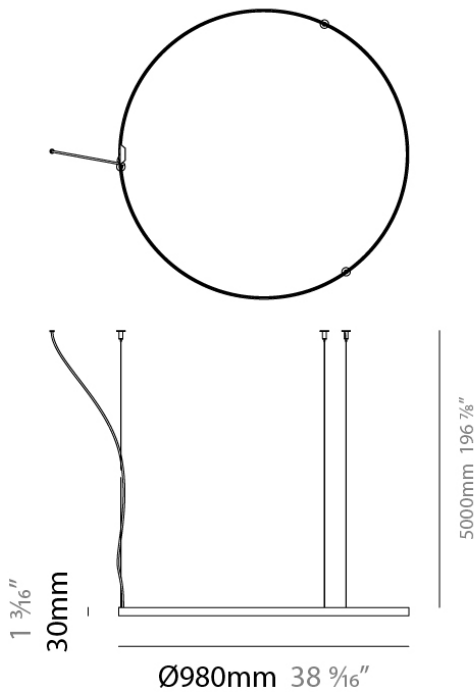

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81635R9-

DESCRIPTION

Zero Round - Suspension - 500mm / 19 11/16" - 25W LED - 24Vdc
- 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 0.83
Weight (lbs): 1.92
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 25
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: DP-Phase Dimming


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 2039 / 2039
CRI: >90 CRI
Efficiency (%): 82.433
Efficacy (lm/w): 103.04
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

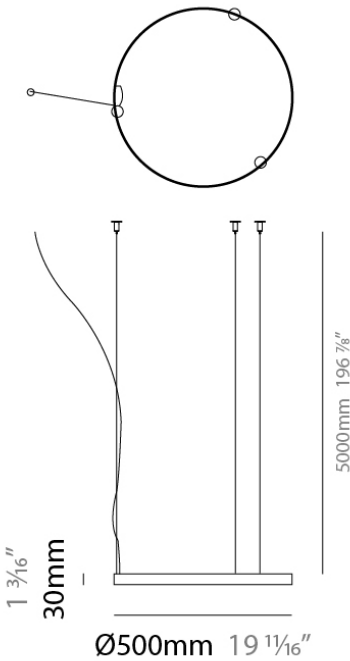

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81636R9-

DESCRIPTION

Zero Round - Suspension - 740mm / 29 1/8" - 34W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 740
Diameter (in): 29 1/8
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 1.12
Weight (lbs): 2.47
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"
Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 34
Total Output Wattage (W): 27
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: (DP-Phase Dimming)


LED

Delivered Lumen Range: 2000 - 3999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 3059 / 3059
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

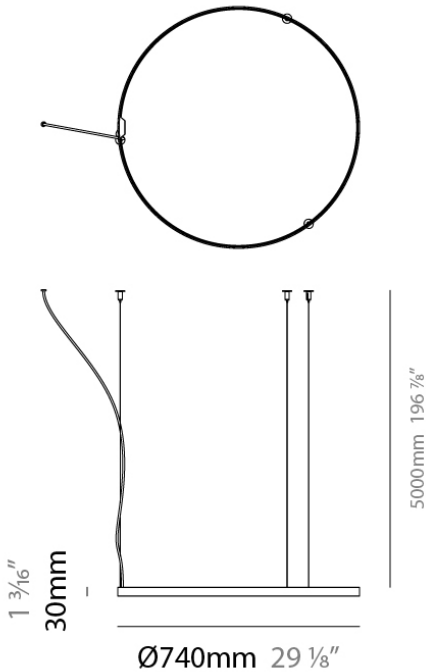

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81655R9-

DESCRIPTION

Zero Ellipse - Suspension - 1300mm / 51 3/16" x 590mm / 23 7/32" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Ellipse
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Oval
Length (mm): 1300
Length (in): 51 3/16
Width (mm): 590
Width (in): 23 7/32
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 1/16
Light Distribution: Direct / Indirect
Weight (kg): 1.55
Weight (lbs): 3.41
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Extruded Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 47
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: DP-Phase Dimming


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 4079 / 4079
CRI: >90 CRI
Efficiency (%): 82.45
Efficacy (lm/w): 109.93
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

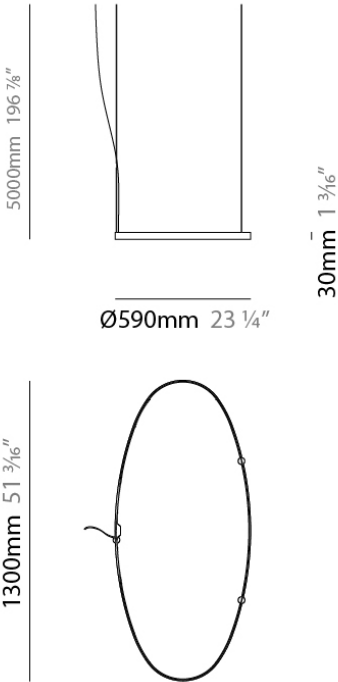

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81656R9-

DESCRIPTION

Zero Round Vertical - Suspension - 500mm / 19 11/16" - 25W LED
- 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 500
Height (in): 19 11/16
Max. Overall Height (mm): 5500
Max. Overall Height (in): 216 1/2
Light Distribution: Direct / Indirect
Weight (kg): 0.83
Weight (lbs): 1.83
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 25
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 2039 / 2039
CRI: >90 CRI
Efficiency (%): 82.433
Efficacy (lm/w): 103.04
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

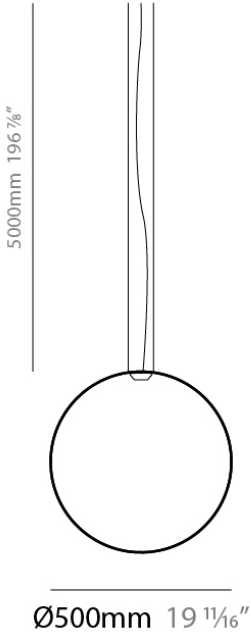

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81657R9-

DESCRIPTION

Zero Round Vertical - Suspension - 740mm / 29 1/8" - 34W - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 740
Diameter (in): 29 1/8
Height (mm): 740
Height (in): 29 1/8
Max. Overall Height (mm): 5740
Max. Overall Height (in): 226
Light Distribution: Direct / Indirect
Weight (kg): 1.12
Weight (lbs): 2.47
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 34
Total Output Wattage (W): 27
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 3059 / 3059
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

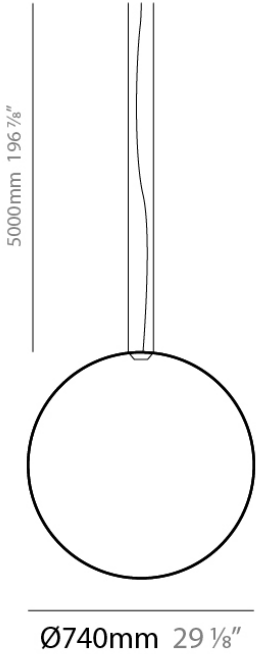

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81658R9-

DESCRIPTION

Zero Round Vertical - Suspension - 980mm / 38 9/16" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 980
Diameter (in): 38 9/16
Height (mm): 980
Height (in): 38 9/16
Max. Overall Height (mm): 5980
Max. Overall Height (in): 235 7/16
Light Distribution: Direct / Indirect
Weight (kg): 1.43
Weight (lbs): 3.15
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 47
Dimming: 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 4079 / 4079
CRI: >90 CRI
Efficiency (%): 82.45
Efficacy (lm/w): 109.93
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

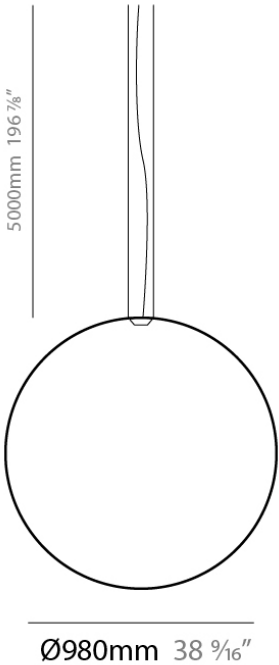

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81659R9-

DESCRIPTION

Zero Square - Suspension - 450mm / 18 1/8" x 450mm / 18 1/8" - 25W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Square
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Square
Length (mm): 460
Length (in): 18 1/8
Width (mm): 460
Width (in): 18 1/8
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 1/16
Light Distribution: Direct / Indirect
Weight (kg): 0.95
Weight (lbs): 2.09
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 25
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: (0-10Vdc dimming / 277Vac) (DP - Phase Dimming)


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 2039 / 2039
CRI: >90 CRI
Efficiency (%): 82.433
Efficacy (lm/w): 103.04
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

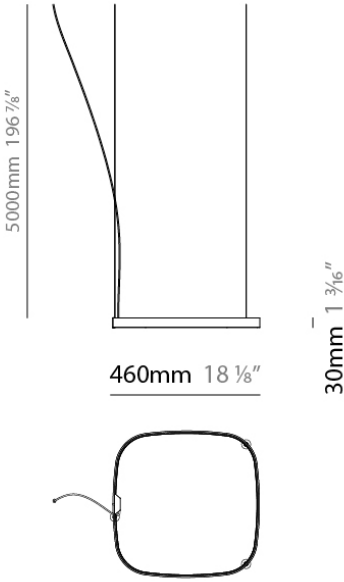

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81660R9-

DESCRIPTION

Zero Square - Suspension - 680mm / 26 3/4" x 680mm / 26 3/4" - 34W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Square
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Square
Length (mm): 680
Length (in): 26 3/4
Width (mm): 680
Width (in): 26 3/4
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 1/16
Light Distribution: Direct / Indirect
Weight (kg): 1.21
Weight (lbs): 2.67
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: 5000mm / 196 7/8"

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 34
Total Output Wattage (W): 27
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): Universal
Output Voltage (V): 24
Upon Request: DP - Phase Dimming


LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 3059 / 3059
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

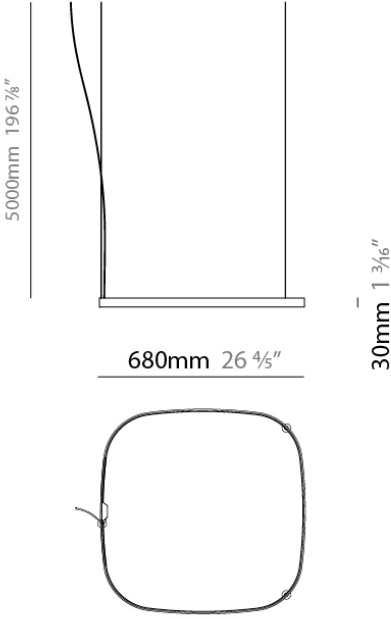

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81692-

DESCRIPTION

Zero Round - Suspension - 1460mm / 57 1/2" - 71W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 1460
Diameter (in): 57 1/2
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 1.58
Weight (lbs): 3.48
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"
Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Input Wattage Range: 50 - 79 W
Lamp Type: LED
Input Wattage (W): 71
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24



LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 6120 / 6120
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

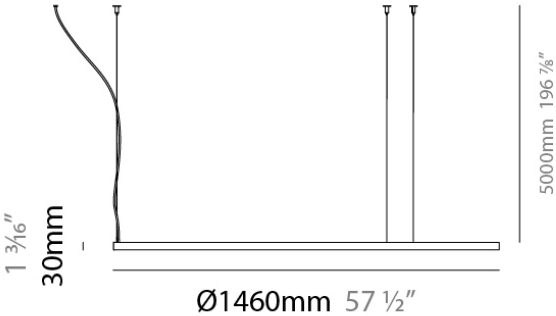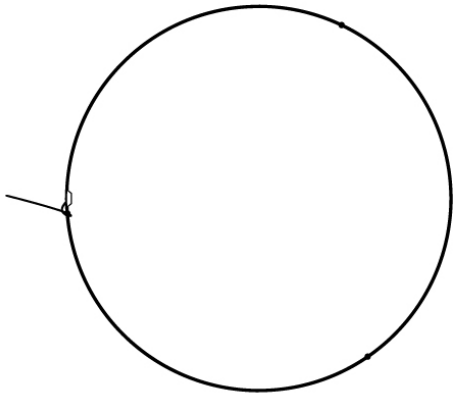

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81698-

DESCRIPTION

Zero Round - Suspension - 1220mm / 48 1/16" - 62W LED - 24Vdc
- 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 1220
Diameter (in): 48 1/16
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 1.06
Weight (lbs): 2.34
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"
Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Input Wattage Range: 50 - 79 W
Lamp Type: LED
Input Wattage (W): 62
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24



LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 5099 / 5099
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

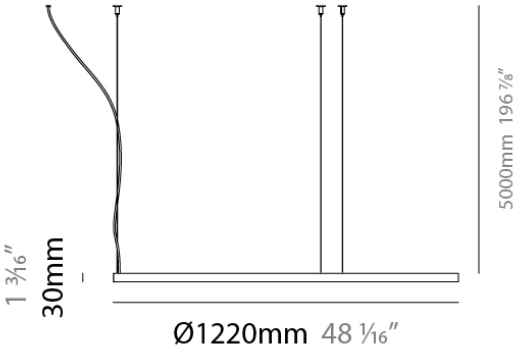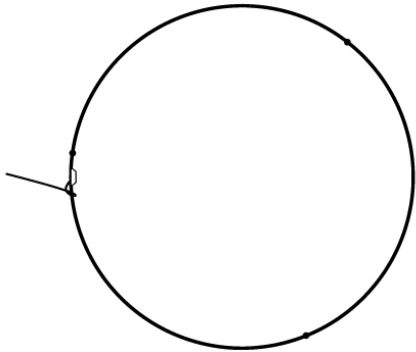

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D81705-

DESCRIPTION

Zero Round - Suspension - 2000mm / 76" - 88W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 1930
Diameter (in): 76
Height (mm): 30
Height (in): 1 3/16
Max. Overall Height (mm): 5030
Max. Overall Height (in): 198 7/16
Light Distribution: Direct / Indirect
Weight (kg): 2.34
Weight (lbs): 5.16
Installation Requirement: Canopy to be ordered separately
Diffuser: Extruded Polycarbonate
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum
Cable Details: Transparent PVC 5000mm / 196 7/8"
Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

ELECTRICAL

Input Wattage Range: 80 - 99 W
Lamp Type: LED
Input Wattage (W): 88
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120-277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24


LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 8158 / 8158
CRI: >90 CRI
Efficiency (%): 82.444
Efficacy (lm/w): 109.12
Lamp Life (hrs): 60000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

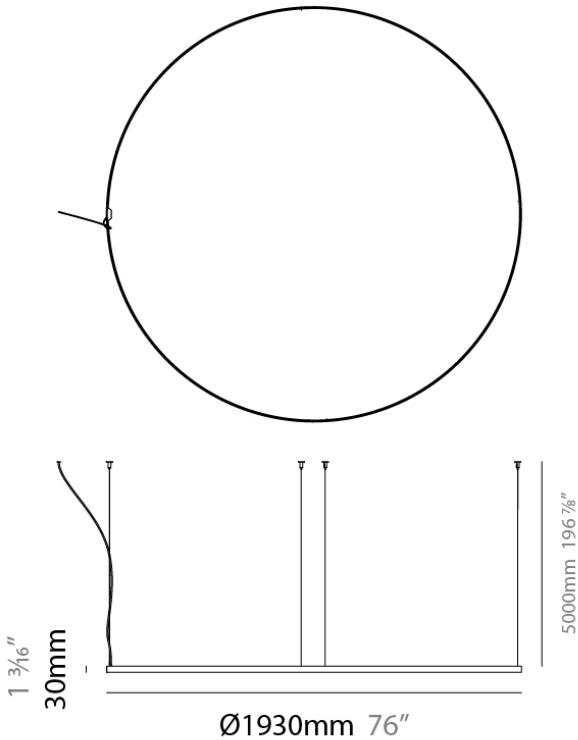

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89058-

DESCRIPTION

Zero Round Canopy - Ø206mm / 8 1/8" - For One Suspension -
Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 206
Diameter (in): 8 1/8
Height (mm): 41
Height (in): 1 5/16
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

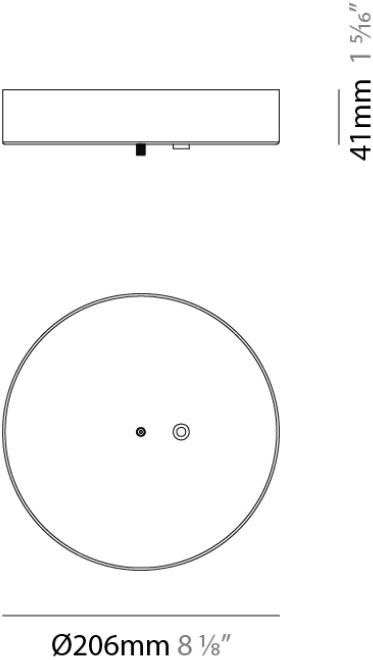

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89059-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Two
Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included
- 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

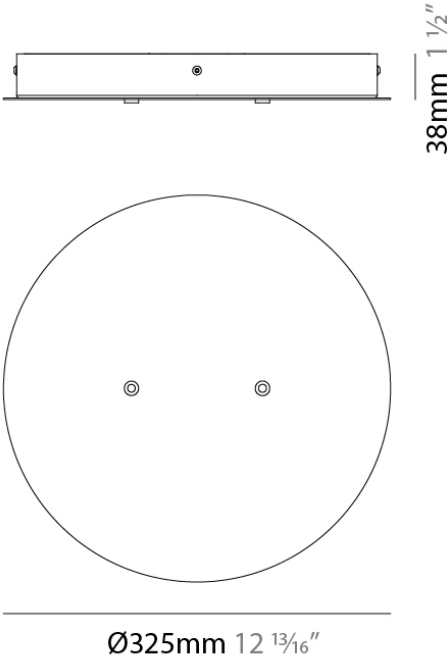

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89060-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Three
Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included
- 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Round
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

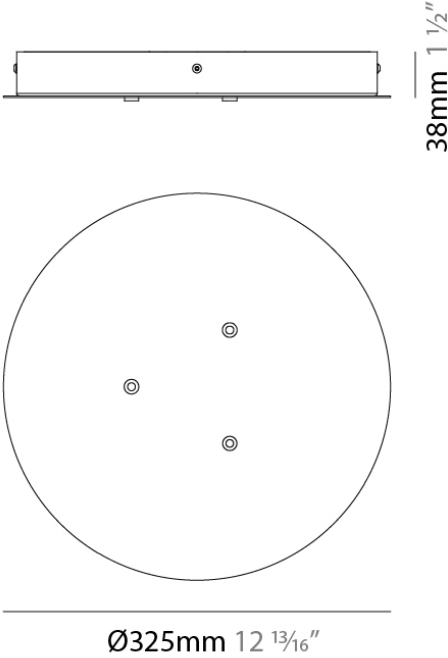

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89061-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Four
Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included
- 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

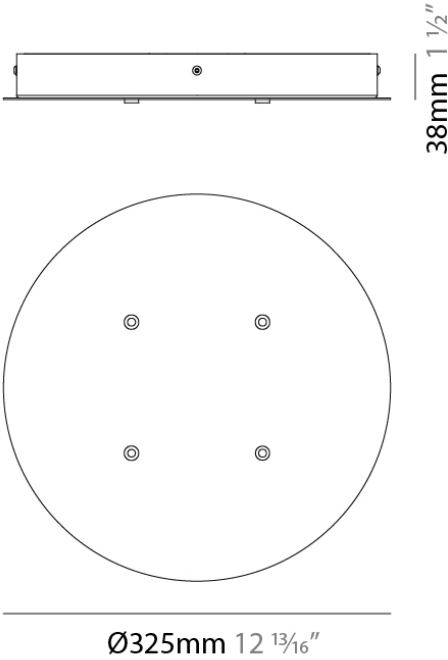

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89062-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Two
Suspensions with joined steel cables - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

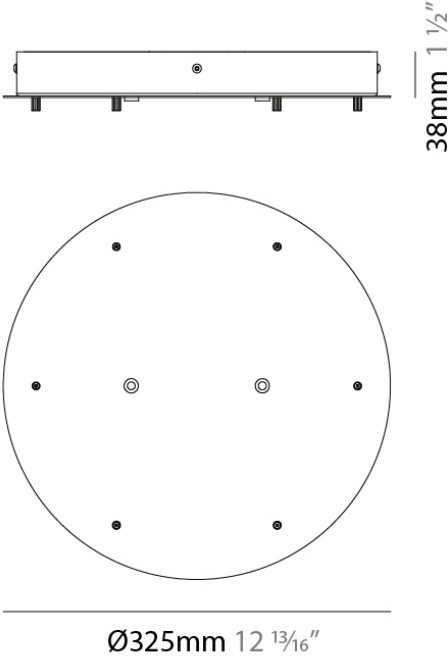

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89063-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Three
Suspensions with joined steel cables - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

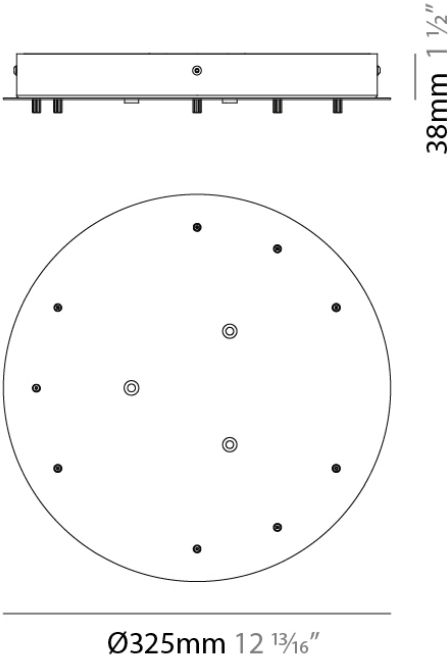

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89064-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Four
Suspensions with joined steel cables - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

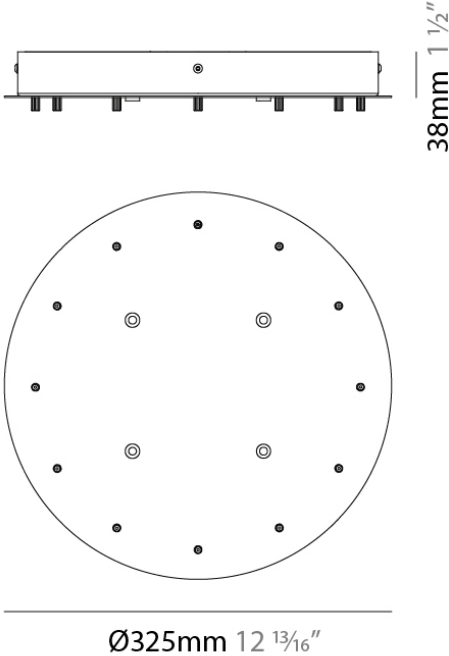

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89085-

DESCRIPTION

Zero Round Canopy - Ø206mm / 8 1/8" - For One Vertical
Suspension - Non-dimming / 0-10Vdc Dimming Driver Included -
120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 206
Diameter (in): 8 1/8
Height (mm): 41
Height (in): 1 5/8
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

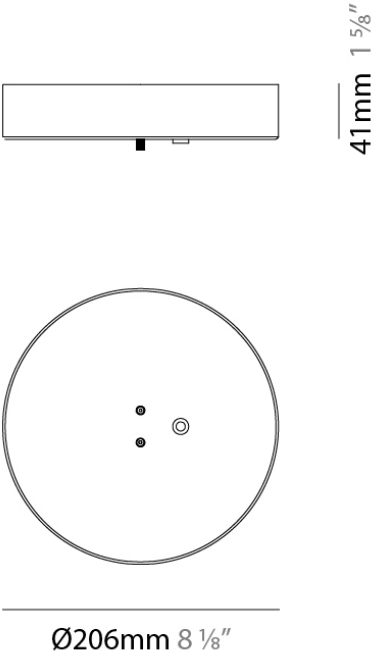

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89086-

DESCRIPTION

Zero Shapes - Canopy for Vertical Suspension - 3 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 395
Diameter (in): 15 9/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

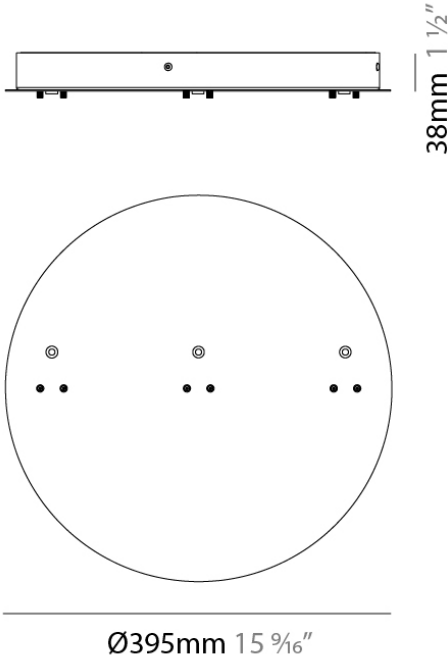

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89087-

DESCRIPTION

Zero Shapes - Canopy for 1 Vertical and 1 Horizontal Suspension
- 2 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 395
Diameter (in): 15 9/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

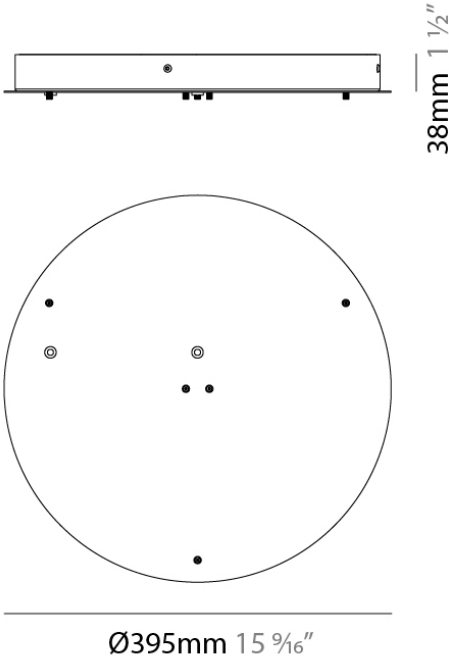

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89088-

DESCRIPTION

Zero Shapes - Canopy for 1 Vertical and 2 Horizontal Suspension
- 3 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 395
Diameter (in): 15 9/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

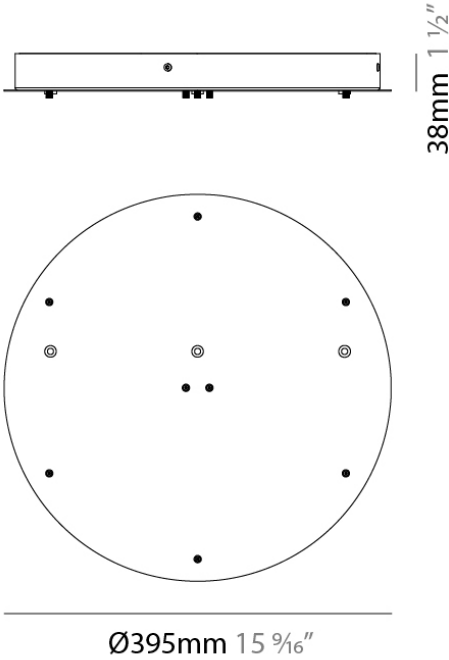

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89089-

DESCRIPTION

Zero Shapes - Canopy for 2 Vertical and 2 Horizontal Suspension
- 4 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc
Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round Vertical
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 395
Diameter (in): 15 9/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

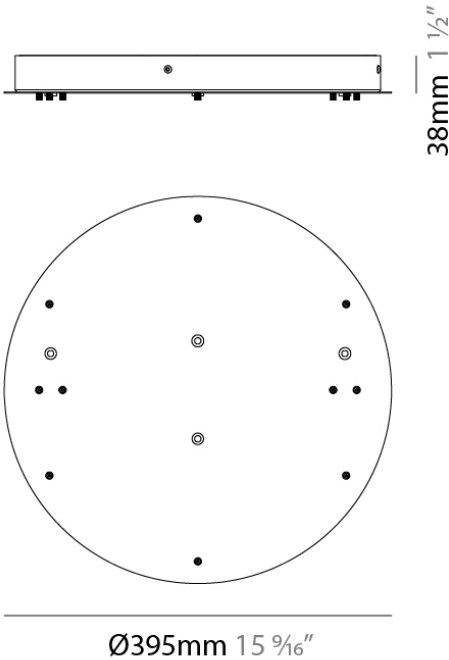

D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89103-

DESCRIPTION

Zero Shapes - Canopy for 1 Horizontal Suspension with joined steel cables - including power supply - 0-10V Dimming

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 206
Diameter (in): 8 2⁄16
Height (mm): 41
Height (in): 1 5⁄16
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum



ELECTRICAL

Input Wattage Range: 50 - 79 W
Lamp Type: LED
Input Wattage (W): 75
Total Output Wattage (W): 60
Dimming: 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

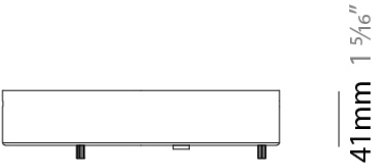

Ø206mm 8 1⁄8"



D8ZERO-ELL-MOD-SYS COMPONENTS
SUSPENSION

D89141-

DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For One Suspension
- Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

GENERAL

Series: Zero Round
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL

Shape: Cylinder
Diameter (mm): 325
Diameter (in): 12 13/16
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / BRZ / MBR / TIM
Fixture Material: Aluminum


ELECTRICAL

Dimming: 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

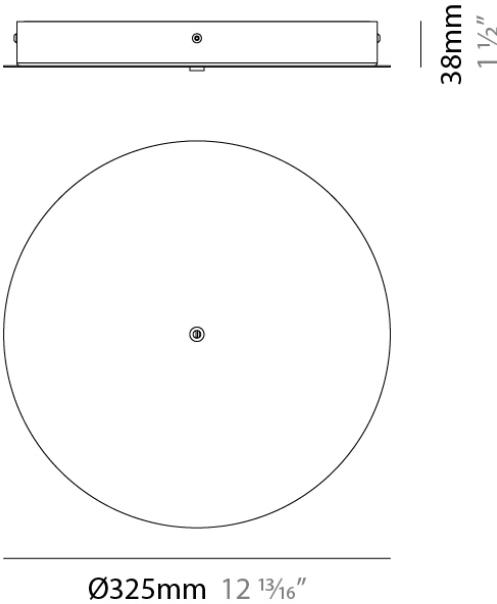

PROJECT
TYPE
NOTES
QUANTITY
DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)