

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81630R9-

#### DESCRIPTION

Zero Round - Suspension - 980mm / 38 3/5" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Round  
 Diameter (mm): 980  
 Diameter (in): 38 3/5"  
 Height (mm): 30  
 Height (in): 1 3/16"  
 Max. Overall Height (mm): 5030  
 Max. Overall Height (in): 198 7/16"  
 Light Distribution: Direct / Indirect  
 Weight (kg): 1.43  
 Weight (lbs): 3.15  
 Installation Requirement: Canopy to be ordered separately  
 Diffuser: Extruded Polycarbonate  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum  
 Cable Details: Transparent PVC 5000mm / 196 7/8"

#### ELECTRICAL

Input Wattage Range: 30 - 49 W  
 Lamp Type: LED  
 Input Wattage (W): 47  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: See canopy components  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24  
 Upon Request: DP-Phase Dimming

#### LED


Delivered Lumen Range: 3000 - 4999 lm  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 4079 / 4079  
 CRI: >90 CRI  
 Efficiency (%): 82.45  
 Efficacy (lm/w): 109.93  
 Lamp Life (hrs): 60000  
 Upon Request: 3000K / 4000K

#### OPTICAL

Optic: Diffused

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

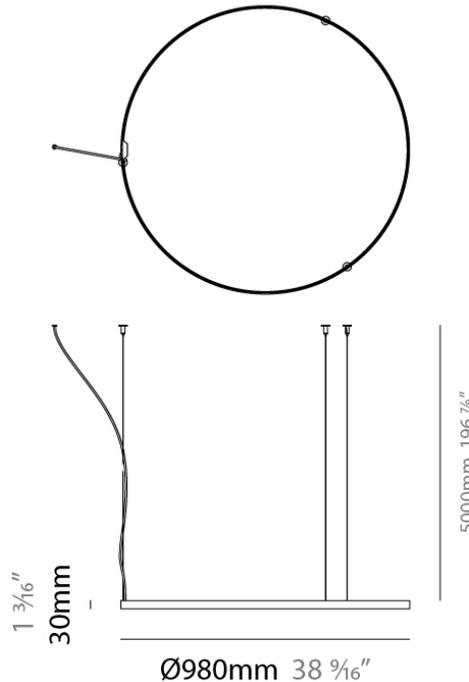

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81635R9-

#### DESCRIPTION

Zero Round - Suspension - 500mm / 19 11/16" - 25W LED - 24Vdc  
- 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Round

Diameter (mm): 500

Diameter (in): 19 11/16

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 7/16

Light Distribution: Direct / Indirect

Weight (kg): 0.83

Weight (lbs): 1.92

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

Cable Details: Transparent PVC 5000mm / 196 7/8"

#### ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED

Input Wattage (W): 25

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: See canopy components

Driver Type: Constant Voltage - 120-277Vac

Driver Class: Class 2

Input Voltage (V): Universal

Output Voltage (V): 24

Upon Request: DP-Phase Dimming

#### LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 2039 / 2039

CRI: >90 CRI

Efficiency (%): 82.433


Efficacy (lm/w): 103.04

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

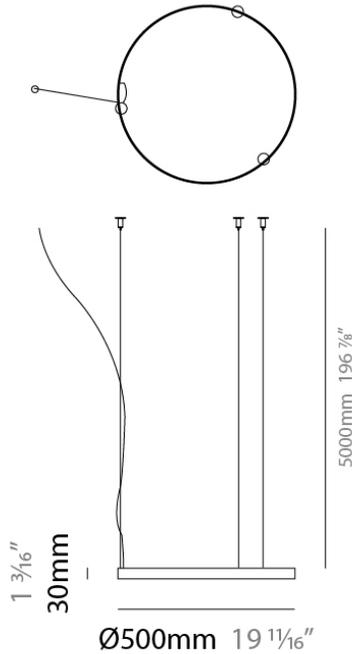

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81636R9-

#### DESCRIPTION

Zero Round - Suspension - 740mm / 29 1/8" - 34W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Round

Diameter (mm): 740

Diameter (in): 29 1/8

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 7/16

Light Distribution: Direct / Indirect

Weight (kg): 1.12

Weight (lbs): 2.47

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

Cable Details: Transparent PVC 5000mm / 196 7/8"

Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

#### ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED

Input Wattage (W): 34

Total Output Wattage (W): 27

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: See canopy components

Driver Type: Constant Voltage - 120-277Vac

Driver Class: Class 2

Input Voltage (V): Universal

Output Voltage (V): 24

Upon Request: (DP-Phase Dimming)

#### LED

Delivered Lumen Range: 2000 - 3999 lm

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 3059 / 3059

CRI: >90 CRI

Efficiency (%): 82.444



Efficacy (lm/w): 109.12

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

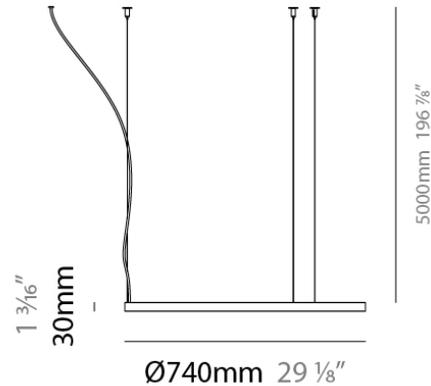

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81655R9-

#### DESCRIPTION

Zero Ellipse - Suspension - 1300mm / 51 3/16" x 590mm / 23 7/32" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Ellipse

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Oval

Length (mm): 1300

Length (in): 51 3/16

Width (mm): 590

Width (in): 23 7/32

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 1/16

Light Distribution: Direct / Indirect

Weight (kg): 1.55

Weight (lbs): 3.41

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Extruded Aluminum

Cable Details: 5000mm / 196 7/8"

#### ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED

Input Wattage (W): 47

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: See canopy components

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): Universal

Output Voltage (V): 24

Upon Request: DP-Phase Dimming

#### LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 4079 / 4079

CRI: >90 CRI

Efficiency (%): 82.45

Efficacy (lm/w): 109.93

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

NOTES

QUANTITY

DATE



## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81656R9-

**DESCRIPTION**  
 Zero Round Vertical - Suspension - 500mm / 19 11/16" - 25W LED  
 - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)


**GENERAL**  
 Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

**PHYSICAL**  
 Shape: Round  
 Diameter (mm): 500  
 Diameter (in): 19 11/16  
 Height (mm): 500  
 Height (in): 19 11/16  
 Max. Overall Height (mm): 5500  
 Max. Overall Height (in): 216 1/2  
 Light Distribution: Direct / Indirect  
 Weight (kg): 0.83  
 Weight (lbs): 1.83  
 Diffuser: Extruded Polycarbonate  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum  
 Cable Details: 5000mm / 196 7/8"

**ELECTRICAL**  
 Input Wattage Range: 20 - 29 W  
 Lamp Type: LED  
 Input Wattage (W): 25  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - 120-277Vac  
 Driver Class: Class 2  
 Input Voltage (V): Universal  
 Output Voltage (V): 24  
 Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)

**LED**  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 2039 / 2039  
 CRI: >90 CRI  
 Efficiency (%): 82.433  
 Efficacy (lm/w): 103.04  
 Lamp Life (hrs): 60000

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

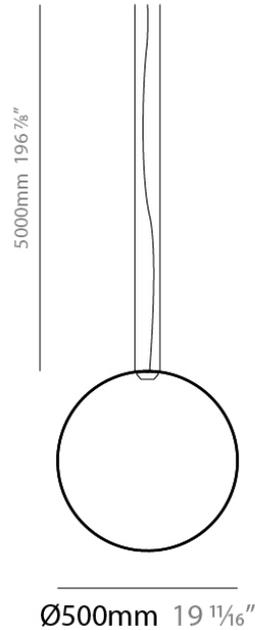

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81657R9-

#### DESCRIPTION

Zero Round Vertical - Suspension - 740mm / 29 1/8" - 34W - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Round  
 Diameter (mm): 740  
 Diameter (in): 29 1/8  
 Height (mm): 740  
 Height (in): 29 1/8  
 Max. Overall Height (mm): 5740  
 Max. Overall Height (in): 226  
 Light Distribution: Direct / Indirect  
 Weight (kg): 1.12  
 Weight (lbs): 2.47  
 Installation Requirement: Canopy to be ordered separately  
 Diffuser: Extruded Polycarbonate  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum  
 Cable Details: 5000mm / 196 7/8"

#### ELECTRICAL


Input Wattage Range: 30 - 49 W  
 Lamp Type: LED  
 Input Wattage (W): 34  
 Total Output Wattage (W): 27  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - 120-277Vac  
 Driver Class: Class 2  
 Input Voltage (V): Universal  
 Output Voltage (V): 24  
 Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)

#### LED

Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 3059 / 3059  
 CRI: >90 CRI  
 Efficiency (%): 82.444  
 Efficacy (lm/w): 109.12  
 Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

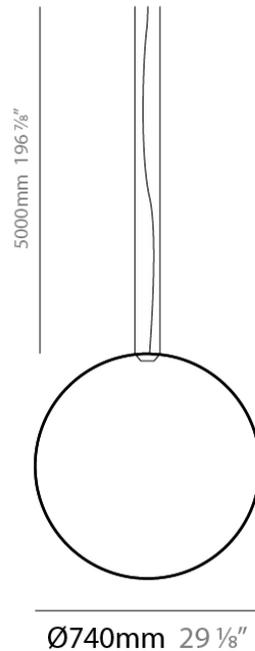

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81658R9-

#### DESCRIPTION

Zero Round Vertical - Suspension - 980mm / 38 9/16" - 47W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Round  
 Diameter (mm): 980  
 Diameter (in): 38 9/16  
 Height (mm): 980  
 Height (in): 38 9/16  
 Max. Overall Height (mm): 5980  
 Max. Overall Height (in): 235 7/16  
 Light Distribution: Direct / Indirect  
 Weight (kg): 1.43  
 Weight (lbs): 3.15  
 Installation Requirement: Canopy to be ordered separately  
 Diffuser: Extruded Polycarbonate  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum  
 Cable Details: 5000mm / 196 7/8"

#### ELECTRICAL


Input Wattage Range: 30 - 49 W  
 Lamp Type: LED  
 Input Wattage (W): 47  
 Dimming: 0-10V Dimming  
 Driver Included: No  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - 120-277Vac  
 Driver Class: Class 2  
 Input Voltage (V): Universal  
 Output Voltage (V): 24  
 Upon Request: (0-10Vdc dimming / 277Vac) (DP-Phase Dimming)

#### LED

Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 4079 / 4079  
 CRI: >90 CRI  
 Efficiency (%): 82.45  
 Efficacy (lm/w): 109.93  
 Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

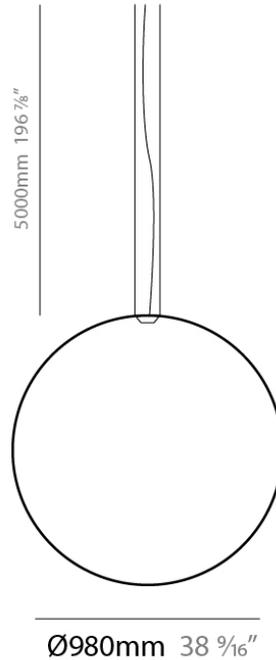

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81659R9-

#### DESCRIPTION

Zero Square - Suspension - 450mm / 18 1/8" x 450mm / 18 1/8" - 25W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Square

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Square

Length (mm): 460

Length (in): 18 1/8"

Width (mm): 460

Width (in): 18 1/8"

Height (mm): 30

Height (in): 1 3/16"

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 1/16"

Light Distribution: Direct / Indirect

Weight (kg): 0.95

Weight (lbs): 2.09

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

Cable Details: 5000mm / 196 7/8"

#### ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED

Input Wattage (W): 25

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: Integrated

Driver Type: Constant Voltage - 120-277Vac

Driver Class: Class 2

Input Voltage (V): Universal

Output Voltage (V): 24

Upon Request: (0-10Vdc dimming / 277Vac) (DP - Phase Dimming)

#### LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 2039 / 2039

CRI: >90 CRI

Efficiency (%): 82.433


Efficacy (lm/w): 103.04

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

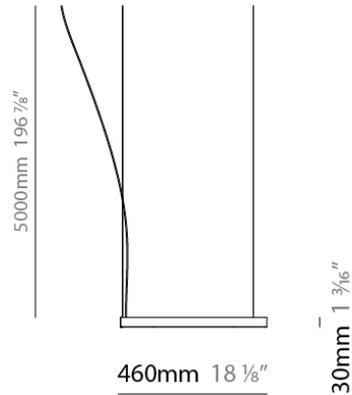

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81660R9-

#### DESCRIPTION

Zero Square - Suspension - 680mm / 26 3/4" x 680mm / 26 3/4" -  
34W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required  
(sold separately)

#### GENERAL

Series: Zero Square

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Square

Length (mm): 680

Length (in): 26 3/4

Width (mm): 680

Width (in): 26 3/4

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 1/16

Light Distribution: Direct / Indirect

Weight (kg): 1.21

Weight (lbs): 2.67

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

Cable Details: 5000mm / 196 7/8"

#### ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED

Input Wattage (W): 34

Total Output Wattage (W): 27

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: Integrated

Driver Type: Constant Voltage - 120-277Vac

Driver Class: Class 2

Input Voltage (V): Universal

Output Voltage (V): 24

Upon Request: DP - Phase Dimming

#### LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 3059 / 3059

CRI: >90 CRI

Efficiency (%): 82.444


Efficacy (lm/w): 109.12

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

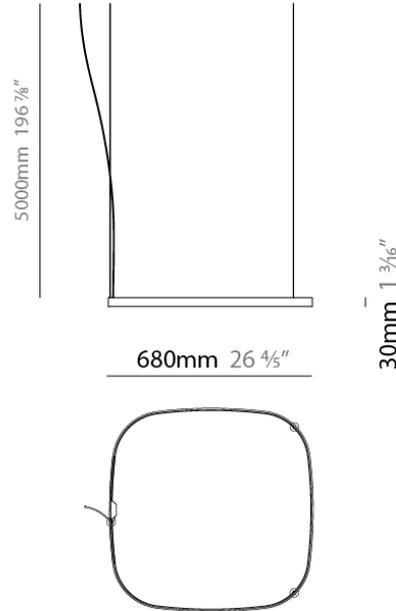

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81692-

#### DESCRIPTION

Zero Round - Suspension - 1460mm / 57 1/2" - 71W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Round

Diameter (mm): 1460

Diameter (in): 57 1/2

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 5030

Max. Overall Height (in): 198 7/16

Light Distribution: Direct / Indirect

Weight (kg): 1.58

Weight (lbs): 3.48

Installation Requirement: Canopy to be ordered separately

Diffuser: Extruded Polycarbonate

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

Cable Details: Transparent PVC 5000mm / 196 7/8"

Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

#### ELECTRICAL

Input Wattage Range: 50 - 79 W

Lamp Type: LED

Input Wattage (W): 71

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: See canopy components

Driver Type: Constant Voltage - 120-277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

#### LED

Delivered Lumen Range: 5000 - 9999 lm

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 6120 / 6120

CRI: >90 CRI

Efficiency (%): 82.444



Efficacy (lm/w): 109.12

Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

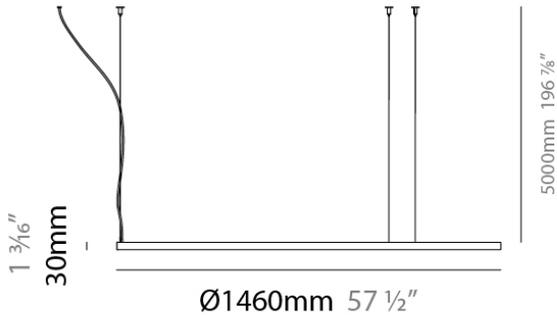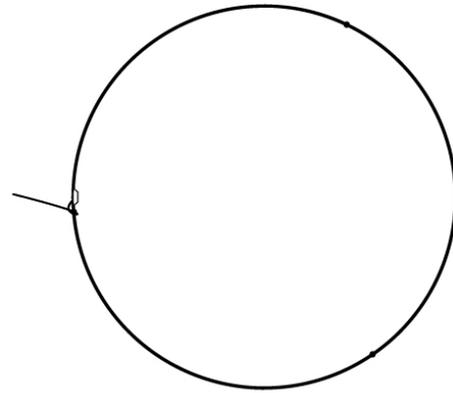

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81698-

#### DESCRIPTION

Zero Round - Suspension - 1220mm / 48 1/16" - 62W LED - 24Vdc  
- 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

#### PHYSICAL

Shape: Round  
Diameter (mm): 1220  
Diameter (in): 48 1/16  
Height (mm): 30  
Height (in): 1 3/16  
Max. Overall Height (mm): 5030  
Max. Overall Height (in): 198 7/16  
Light Distribution: Direct / Indirect  
Weight (kg): 1.06  
Weight (lbs): 2.34  
Installation Requirement: Canopy to be ordered separately  
Diffuser: Extruded Polycarbonate  
Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
Fixture Material: Aluminum  
Cable Details: Transparent PVC 5000mm / 196 7/8"  
Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

#### ELECTRICAL



Input Wattage Range: 50 - 79 W  
Lamp Type: LED  
Input Wattage (W): 62  
Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: No  
Driver Location: See canopy components  
Driver Type: Constant Voltage - 120-277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24

#### LED

Delivered Lumen Range: 5000 - 9999 lm  
Color Temperature (°K): 2700 / 3000  
Max. Delivered Lumen (lm): 5099 / 5099  
CRI: >90 CRI  
Efficiency (%): 82.444  
Efficacy (lm/w): 109.12  
Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

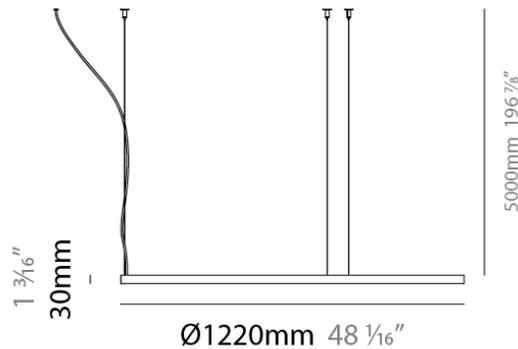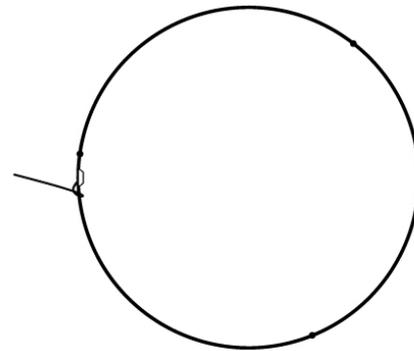

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D81705-

#### DESCRIPTION

Zero Round - Suspension - 2000mm / 76" - 88W LED - 24Vdc - 2700K / 3000K - CRI >90 - Canopy required (sold separately)

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Round  
 Diameter (mm): 1930  
 Diameter (in): 76  
 Height (mm): 30  
 Height (in): 1 3/16  
 Max. Overall Height (mm): 5030  
 Max. Overall Height (in): 198 7/16  
 Light Distribution: Direct / Indirect  
 Weight (kg): 2.34  
 Weight (lbs): 5.16  
 Installation Requirement: Canopy to be ordered separately  
 Diffuser: Extruded Polycarbonate  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum  
 Cable Details: Transparent PVC 5000mm / 196 7/8"  
 Upon Request: Matte White / Black / Bronze / Matte Brass / Titanium

#### ELECTRICAL



Input Wattage Range: 80 - 99 W  
 Lamp Type: LED  
 Input Wattage (W): 88  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: See canopy components  
 Driver Type: Constant Voltage - 120-277Vac  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### LED

Delivered Lumen Range: 5000 - 9999 lm  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 8158 / 8158  
 CRI: >90 CRI  
 Efficiency (%): 82.444  
 Efficacy (lm/w): 109.12  
 Lamp Life (hrs): 60000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

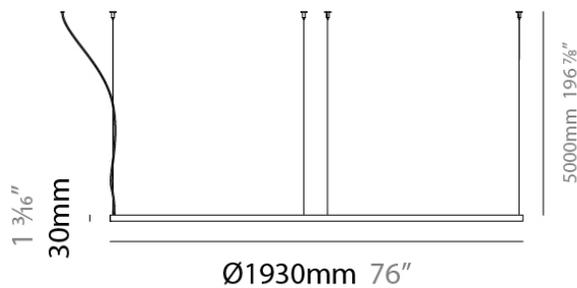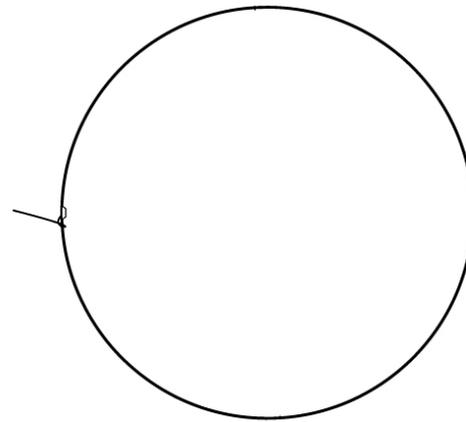

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89058-

#### DESCRIPTION

Zero Round Canopy - Ø206mm / 8 1/8" - For One Suspension - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 206

Diameter (in): 8 1/8

Height (mm): 41

Height (in): 1 5/16

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24


#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



41mm 1 5/16"



Ø206mm 8 1/8"



|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89059-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Two Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 325  
 Diameter (in): 12 13/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

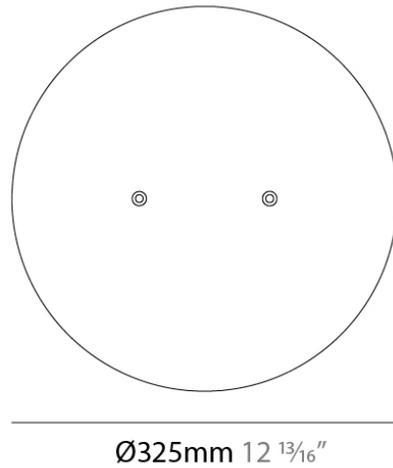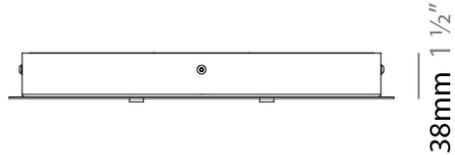

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89060-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Three Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Round  
 Diameter (mm): 325  
 Diameter (in): 12 13/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

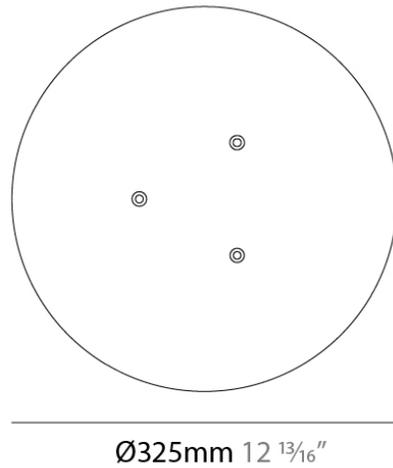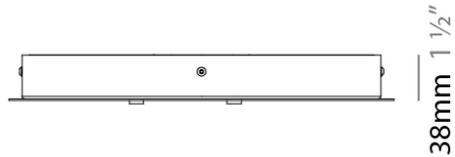

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89061-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Four Suspensions - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 325  
 Diameter (in): 12 13/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

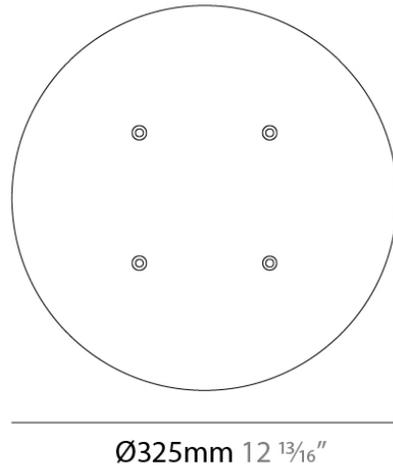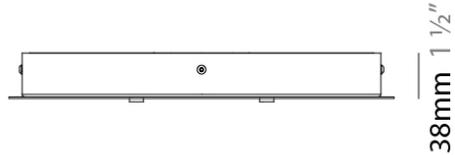

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89062-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Two Suspensions with joined steel cables - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 325  
 Diameter (in): 12 13/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

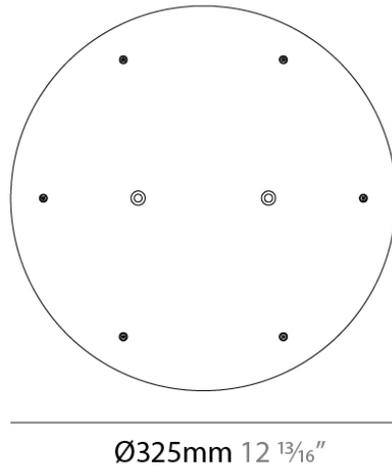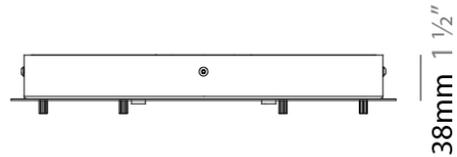

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89063-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Three Suspensions with joined steel cables - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 325  
 Diameter (in): 12 13/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

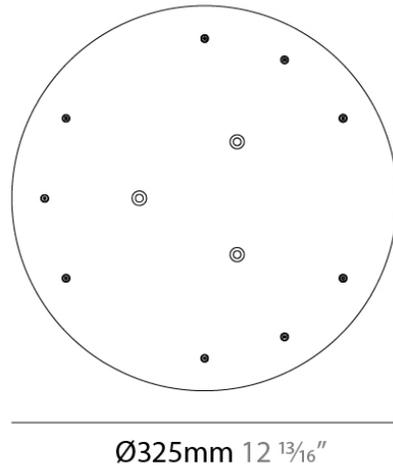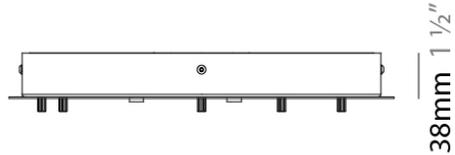

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89064-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For Four  
Suspensions with joined steel cables - Non-dimming / 0-10Vdc  
Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
Diameter (mm): 325  
Diameter (in): 12 13/16  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

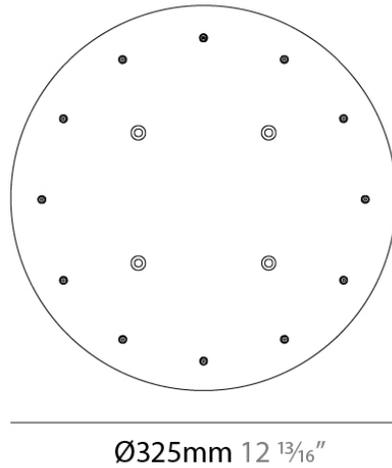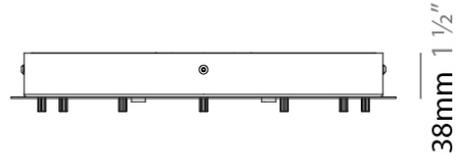

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89085-

#### DESCRIPTION

Zero Round Canopy - Ø206mm / 8 1/8" - For One Vertical Suspension - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round  
Brand: Panzeri  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

#### PHYSICAL

Shape: Cylinder  
Diameter (mm): 206  
Diameter (in): 8 1/8  
Height (mm): 41  
Height (in): 1 5/8  
Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
Fixture Material: Aluminum


#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: Yes  
Driver Location: Integrated  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

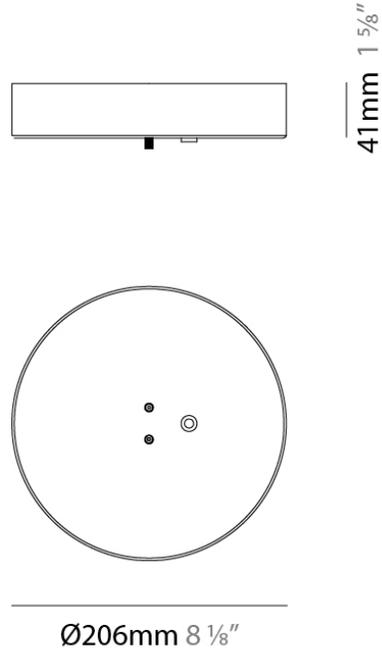

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89086-

#### DESCRIPTION

Zero Shapes - Canopy for Vertical Suspension - 3 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 395  
 Diameter (in): 15 9/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

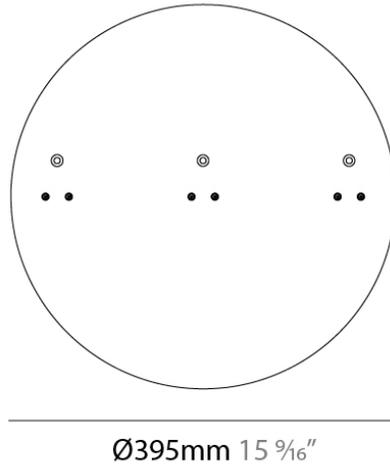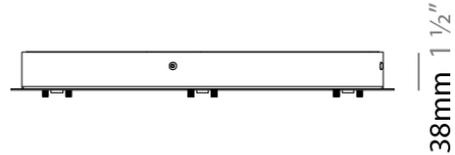

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89087-

#### DESCRIPTION

Zero Shapes - Canopy for 1 Vertical and 1 Horizontal Suspension  
 - 2 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc  
 Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL


Shape: Cylinder  
 Diameter (mm): 395  
 Diameter (in): 15 9/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

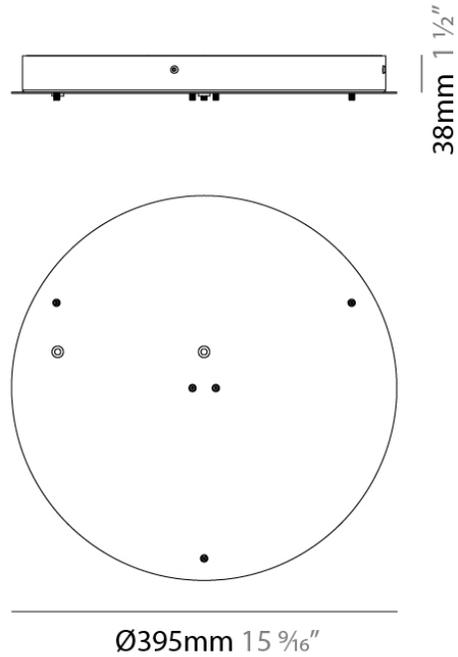

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89088-

#### DESCRIPTION

Zero Shapes - Canopy for 1 Vertical and 2 Horizontal Suspension  
 - 3 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc  
 Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL


Shape: Cylinder  
 Diameter (mm): 395  
 Diameter (in): 15 9/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

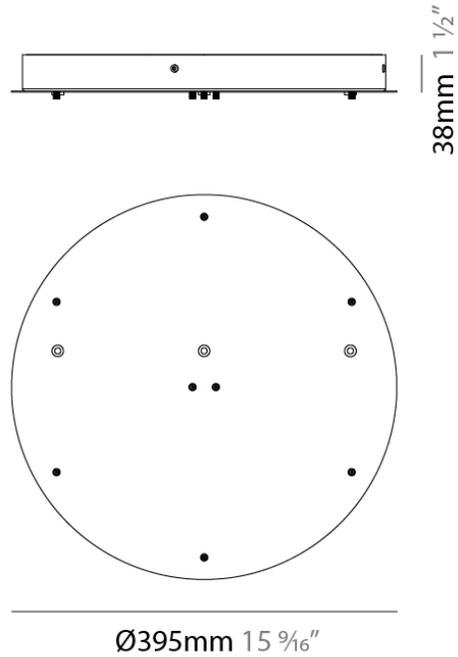

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89089-

#### DESCRIPTION

Zero Shapes - Canopy for 2 Vertical and 2 Horizontal Suspension  
 - 4 Suspensions - 395mm / 15 9/16" - Non-dimming / 0-10Vdc  
 Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round Vertical  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 395  
 Diameter (in): 15 9/16  
 Height (mm): 38  
 Height (in): 1 1/2  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

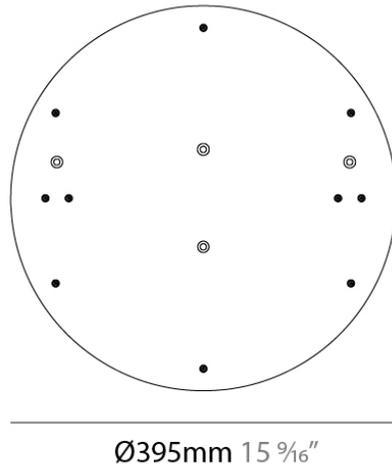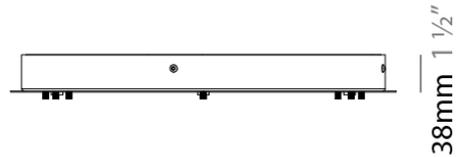

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89103-

#### DESCRIPTION

Zero Shapes - Canopy for 1 Horizontal Suspension with joined steel cables - including power supply - 0-10V Dimming

#### GENERAL

Series: Zero Round  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL



Shape: Cylinder  
 Diameter (mm): 206  
 Diameter (in): 8 1/8"  
 Height (mm): 41  
 Height (in): 1 5/16"  
 Fixture Finish: WHI / BLK / BRZ / MBR / TIM  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 50 - 79 W  
 Lamp Type: LED  
 Input Wattage (W): 75  
 Total Output Wattage (W): 60  
 Dimming: 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

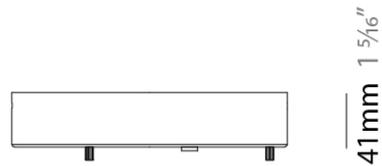

Ø206mm 8 1/8"



## D8ZERO-VER-MOD-SYS COMPONENTS SUSPENSION

### D89141-

#### DESCRIPTION

Zero Round Canopy - Ø325mm / 12 13/16" - For One Suspension  
- Non-dimming / 0-10Vdc Dimming Driver Included - 120/277Vac

#### GENERAL

Series: Zero Round

Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 325

Diameter (in): 12 13/16

Height (mm): 38

Height (in): 1 1/2

Fixture Finish: WHI / BLK / BRZ / MBR / TIM

Fixture Material: Aluminum

#### ELECTRICAL

Dimming: 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

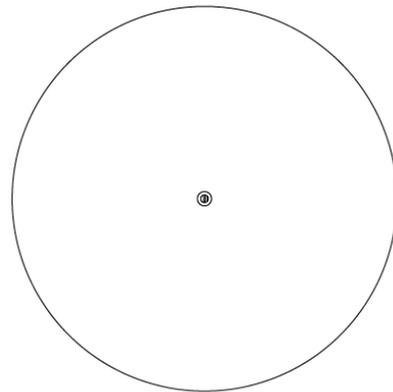

Ø325mm 12 13/16"



## D8ZERO-VER-MOD-SYS COMPONENTS

### LEGEND

|  |  |  |
|--|--|--|
|  floor-mounted   |  pivotable  |  special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  wall and ceiling: recessed and surface mounted              |  rotating   |  warm dim / natural dimming LED   |
|  ceiling-mounted and wall-mounted                            |  illuminate tilted  |  rechargeable battery powered   |
|  wall-mounted  |  color of suspension cable                                    |  fixture with natural vivid LED (upon request)  |
|  omni-directional light distribution                         |  length of suspension cable                                   |  color rendering index  |
|  direct light distribution                                   |  reflector degree selection                                   |  color temperature  |
|  direct/indirect light distribution                          |  super spot   |  lumen (luminous flux)  |
|  indirect light distribution                                 |  lens   |  efficacy (lumens per watt)   |
|  asymmetric light distribution                               |  lens pack  |  Unified Glare Rating (UGR) range from 5-40   |
|  aura light distribution                                     |  shine ring   |  marine grade (AISI 316 stainless steel)  |
|  round wall or ceiling cut-out                               |  integrated shine ring with diffuser                          |  walk on  |
|  square wall or ceiling cut-out                              |  free individual colors 01-29                                 |  drive on   |
|  the supplied jig specifies the cutout dimensions            |  individual colors: 00 (free of charge), 01-25 (extra charge) |  Dark Sky Compliance  |
|  minimum distance (meters) lamp - object                     |  luminaire part to be colored (F1)                            |  Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  recessed depth  |  luminaire part to be colored (F2)                            |  lamp protected against explosion   |
|  ceiling thickness in mm                                    |  luminaire part to be colored (F3)                           |  blown glass using traditional methods by master glass blower                                  |
|  ceiling thickness selection                               |  luminaire part to be colored (F4)                          |  acoustic material  |
|  dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  luminaire part to be colored (F5)                          |  protection class I, protection insulation  |
|  included or excluded LED driver/transformer/control gear  |  color of 3-circuit adaptor                                 |  protection class II, protection insulation   |
|  separately switchable                                     |  indirect diffuser  |  ETL Certified to UL and CSA Standards  |
|  sensor  |  direct diffuser  |  UL Certified to UL and CSA Standards   |
|  remote control  |  ball-proof (upon request)                                  |  CSA Certified to UL and CSA Standards  |
|  available upon request                                    |  accessory  |  Certified for North American Standards   |

### IP RATING

|  |  |
|--|--|
|  IP20 | protected against ingress of solid bodies greater than 12.5mm (finger)   |
|  IP33 | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  IP40 | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  IP43 | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  IP44 | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  IP65 | protected against ingress of dust<br>protected against jets of water   |
|  IP66 | protected against ingress of dust<br>protected against powerful jets of water or heavy seas  |
|  IP67 | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  IP68 | protected against ingress of dust<br>protected against immersion of water under pressure for long periods  |

### IK RATING

|  |   |
|--|---|
|  IK01 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  IK03 | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  IK06 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  IK08 | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |