


Date: _____ Project: _____
 Fixture Type: _____ Specifier/Rep: _____

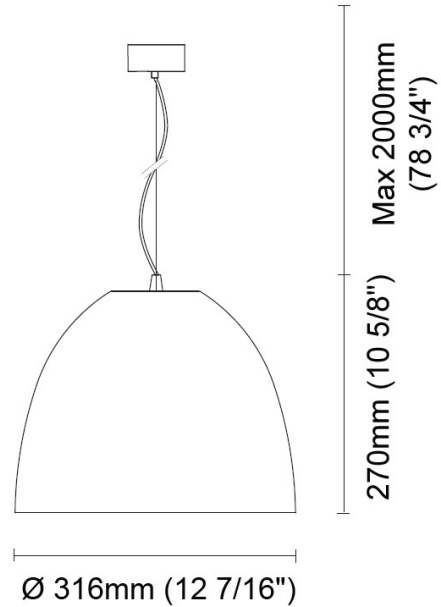



△ 3.1kg / 6.83lbs

Certified by Standards
 us CSA certified, listed to UL & CSA

Available for International specifications by adding "INT" at the end of the existing Model # International spec sheets are available upon request

Exact Measurements: Metric

Model:	L1010006
Installation:	Suspension - Ceiling
Light Color:	Natural White
Color Temperature:	4000K
Delivered Lumen:	4520lm
CRI:	80 (>90 upon request)
Fixture Finish:	Matte White
Fixture Material:	Aluminum and Steel powder coated
Optic:	30°
Lamp Type:	LED
Number of LEDs:	1
Max Wattage Per Lamp:	37W
Total Wattage:	37W
Input Voltage:	120VAC
IP Rating:	IP20
Width:	316mm / 12 7/16"
Height:	270mm / 10 5/8"
Max. Overall Height:	2270mm / 89 3/8"
Weight:	3.10kg / 6.83lbs
Power Supply:	Integral 120V/1050mA LED Driver (Dimming and 277V options available with remote driver upon request)

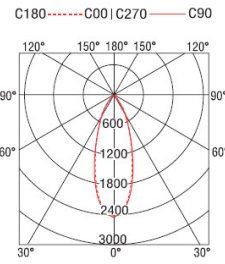

(m)	∅ (m)		(lx)	
	Alpha=16.3°+16.3°	Beta=15.8°+15.8°	max	med
1.0	0.59	0.56	7038	4297
2.0	1.17	1.13	1760	1074
3.0	1.76	1.69	782	477
4.0	2.34	2.26	440	269
5.0	2.93	2.82	282	172



Additional Details

Main body made of aluminum and steel, powder coated. Custom RAL and veneer finishes available upon request; min. 4 pieces required; surcharge applicable. Optic tray made of die-cast aluminum powder coated. Reflector in pure aluminum. Passive cooling Led. Protection glass. Frosted glass and CRI>90 on request.

Date: _____ Project: _____

Fixture Type: _____ Specifier/Rep: _____

Alternative Finish Models

Aurora XS - [L1010008] -- 316 mm / 12 7/16" - 37W LED - 4000K - Gray - 30°
Aurora XS - [L1010007] -- 316 mm / 12 7/16" - 37W LED - 4000K - Black - 30°

Available Sizes and / or Lamping

Aurora XS - [L1010000] -- 316 mm / 12 7/16" - 37W LED - 3000K - White - 30°
Aurora XS - [L1010003] -- 316 mm / 12 7/16" - 37W LED - 3000K - White - 60°
Aurora XS - [L1010009] -- 316 mm / 12 7/16" - 37W LED - 4000K - White - 60°