

A39013-

base number Finishes

DESCRIPTION

Suspension Power Feed 3x0.75, 2000mm

1.To build a product code in our configurator select the specify button on the base model #

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Brand: Prolicht Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 114

Diameter (in): $4\frac{1}{2}$

Length (mm): 2000

Length (in): 78 3/4

Width (mm): 81

Width (in): 3 1/16

Height (mm): 32

Height (in): 1 $\frac{1}{4}$

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



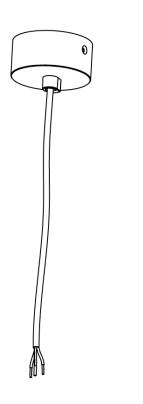






A39013-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

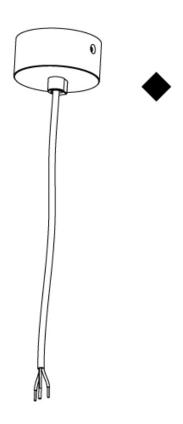





COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish

Aluminum Natural Anodized - 00 (ANA)	Sparkling Silver - 01 (SSR)	Black Velvet - 02 (BKV)	Crystal White - 03 (CWI)	Creamy - 04 (CRY)	Hampton Bay - 05 (HAB)
Lagoon - 06 (LAG)	Urban Forest - 07 (UFT)	In the Army - 08 (ITA)	Rusty Angel - 09 (RUA)	Rusty Rush - 10 (RUR)	Milk and Chocolate - 11 (MIC)
Fade to Gray - 12 (FTG)	Mysterious Gray - 13 (MYG)	Twilight - 14 (TWT)	Lost Dream - 15 (LOD)	Purple Sky - 16 (PUS)	Fresh Oh - 17 (FRO)
Funky P 18 (FUP)	Kissing Aphrodite - 19 (KIA)	Poseidon's Paradise - 20 (POP)	Blue Sky - 21 (BLS)	Spring Green - 22 (SPG)	Mellow Yellow - 23 (MEY)
Golden Heart - 24 (GOH)	Gun Metal - 25 (GUM)	Champagne Cream - 26 (CHC)	Copper Mine - 27 (COM)	Ancient Bronze - 28 (ABZ)	Jazz Gold - 29 (JAG)

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.





PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

LEGEND

=	loor-mounted				
-	1001-Indulted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
/ w	vall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
↑ ce	eiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow \parallel w$	vall-mounted	T	color of suspension cable	71400	fixture with natural vivid LED (upon request)
Y or	omni-directional light distribution		length of suspension cable	CRI	color rendering index
∆ di	direct light distribution		reflector degree selection	(K)	color temperature
di	direct/indirect light distribution	s s	super spot	(X)	lumen (luminous flux)
in	ndirect light distribution	*	lens	(₹	efficacy (lumens per watt)
as	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
au	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
ℴ ro	ound wall or ceiling cut-out	\odot	integrated shine ring with diffuser	3	walk on
SC SC	quare wall or ceiling cut-out		free individual colors 01-29	②	drive on
ද්දි th	he supplied jig specifies the cutout dimensions	0	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d•≱ m	ninimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u></u> re	ecessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
<u></u> Се	eiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1 ce	eiling thickness selection		luminaire part to be colored (F4)		acoustic material
== (s	dimmable DP (phase), DV (0-10V), DD (dali), DS step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
in cc	ncluded or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8 Se	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
ಿ ″/ se	sensor	0	direct diffuser	։ (Մ) us	UL Certified to UL and CSA Standards
[re	emote control	0	ball-proof (upon request)	(B)	CSA Certified to UL and CSA Standards
J av	available upon request	9	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)