

#### D141203-

base number

Finish Options

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

#### FI FCTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

#### LED


#### OPTICAL

#### RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$ 

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	










D141203-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

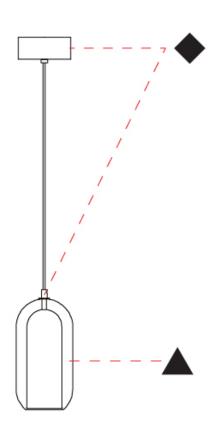





#### D141204-

base number

Finish	
Options	

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cubantanan a Ambiant	

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 8	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: GU24 / 277Vac	

#### LED


#### OPTICAL

# **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	










D141204-

PROJECT	
ТУРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

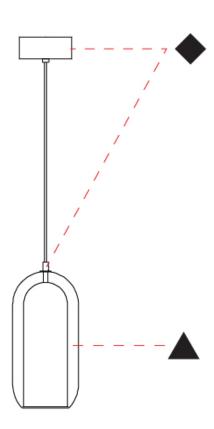





# D141205-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Holder Finish: CHR / SGD / SBK Fixture Material: Glass / Metal

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable

Е	LECTRICAL
N	lumber of Lamps: 1
L	amp Type: LED Retrofit
В	ulb Included: Bulb Not Included
M	lax. Wattage Per Lamp (W): 8
L	amp Base: E26
Ir	nput Voltage (V): 120
ū	Ipon Request: GU24 / 277Vac

#### LED


#### OPTICAL

# **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	








Page 5/20



D141205-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

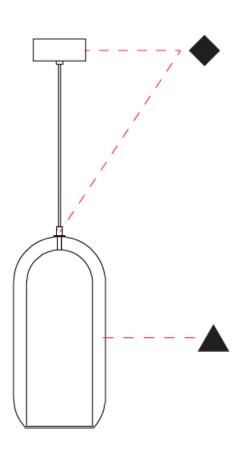





# **D141206-** -

base number Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 280
Diameter (in): 11
Height (mm): 550
Height (in): 21 <sup>5</sup> / <sub>8</sub>
Max. Overall Height (mm): 2050
Max. Overall Height (in): 80 <sup>11</sup> / <sub>16</sub>
Light Distribution: Omnidirectional
Weight (kg): 3.570
Weight (lbs): 7.87
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal

#### FI FCTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8
Lamp Base: E26
Input Voltage (V): 120
Upon Request: GU24 / 277Vac

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable


#### LED

# OPTICAL RATINGS AND CERTIFICATIONS

#### Certified By: Certified for North American Standards





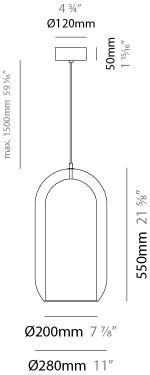






D141206-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

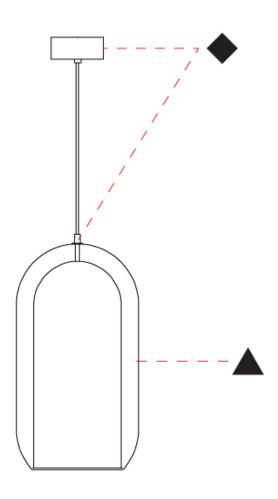





# **AERON 3 LIGHT LINEAR SUSPENSION**

#### D141211-

base number

inish	Finish
Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Aeron	
Subseries: Aeron 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cubestages a Ambient	_

Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 130
Diameter (in): 5 ½
Length (mm): 1200
Length (in): 47 1/4
Height (mm): 130
Height (in): 5 1/8
Max. Overall Height (mm): 1630
Max. Overall Height (in): 63 $^3\!\!/_{\!\scriptscriptstyle 16}$
Light Distribution: Omnidirectional
Weight (kg): 2.800
Weight (lbs): 6.18
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal
Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable
EI ECTDICAI

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

#### LED


#### OPTICAL

# **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



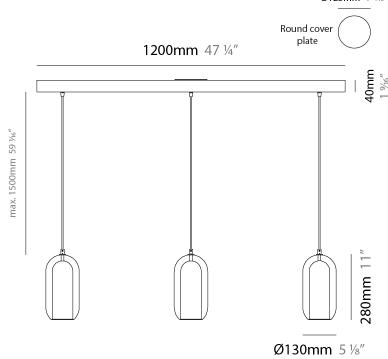




Page 9/20



# **AERON 3 LIGHT LINEAR SUSPENSION**

D141211-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

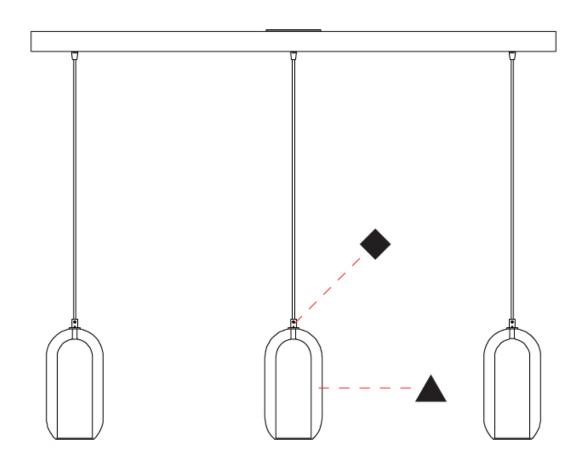





# **AERON 3 LIGHT CLUSTER SUSPENSION**

#### D141212-

base number

Finish Options

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Aeron	
Subseries: Aeron 3 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

PHYSICAL	
Shape: Cylinder	
Diameter (mm): 540	
Diameter (in): 21 1/4	
Height (mm): 210	
Height (in): 8 1/4	

Max. Overall Height (mm): 1710

Max. Overall Height (in): 67 1/16

Light Distribution: Omnidirectional

Weight (kg): 6.830 Weight (lbs): 15.06

Subcategory: Ambient

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK Fixture Material: Glass / Metal

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable

#### ELECTRICAL

ELECTRICAL
Number of Lamps: 2 + 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8 + 4
Lamp Base: E26 + E12
Input Voltage (V): 120

#### LED


#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





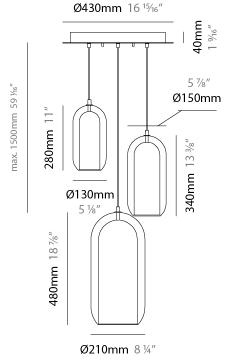






# **AERON 3 LIGHT CLUSTER SUSPENSION**

D141212-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE

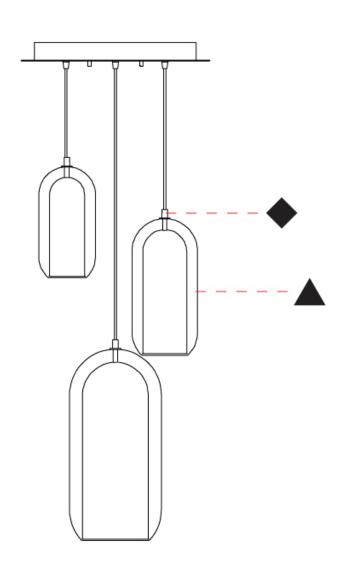





D144033-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Aeron
Brand: Cangini & Tucci
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 130

Diameter (in): 5 ½

Height (mm): 290

 $\frac{\text{Height (in): } 11 \sqrt[7]{_{16}}}{\text{Light Distribution: Omnidirectional}}$ 

Weight (kg): 1.210 Weight (lbs): 2.68

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal
Cable Details: Black Rubber Cable

#### **ELECTRICAL**

Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

#### LED

# OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D144033-



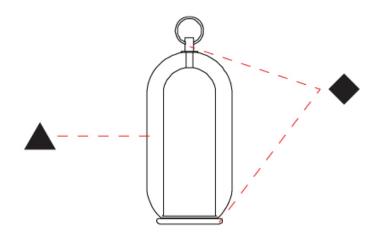





D144034-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Aeron	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

#### ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

#### LED

# OPTICAL

#### RATINGS AND CERTIFICATIONS


Cable Details: Black Rubber Cable

Certified By: Certified for North American Standards

IP rating: IP20












D144034-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

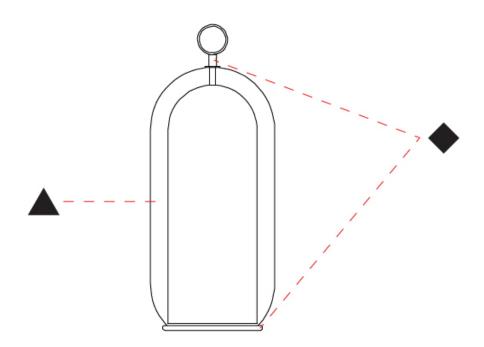





D144035-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Aeron Brand: Cangini & Tucci Division: Design Mounting Type: Portable Mounting Location: Table Subcategory: Table

PHYSICAL Shape: Cylinder Diameter (mm): 280 Diameter (in): 11 Height (mm): 560 Height (in): 22 1/16 Light Distribution: Omnidirectional

Weight (kg): 5.670

Weight (lbs): 12.50

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK Fixture Material: Glass / Metal Cable Details: Black Rubber Cable

#### **ELECTRICAL**

Number of Lamps: 1 Lamp Type: LED Retrofit Bulb Included: Bulb Not Included Input Voltage (V): 120

#### LED


# OPTICAL

#### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards












D144035-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

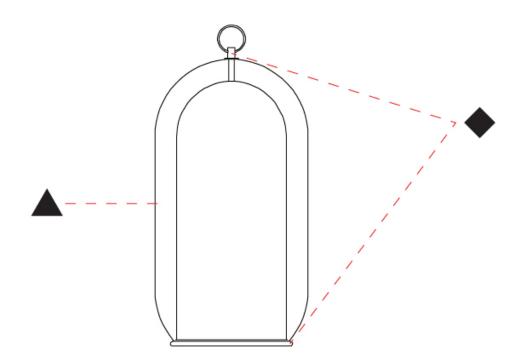





# **AERON**

COLOR FINISH CHART

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

#### **Fixture Finish**

















### **Holder Finish**







**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





### **AERON**

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

# **LEGEND**

ПП	we s				special LED (upon request) PGR_PGRW_tunable
<u></u>	floor-mounted	Á	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	T	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	<b>←</b> …	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
<b>€</b> €	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□</b> **	minimum distance (meters) lamp - object	<b>•</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>(</b> )	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
<b>₩</b>	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>(II)</b>	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	O	direct diffuser	ւ <b>Մ</b> ) ու	UL Certified to UL and CSA Standards
	remote control	(3)	ball-proof (upon request)	<b>(</b>	CSA Certified to UL and CSA Standards
J	available upon request	0	accessory	<b>(Z</b> )	Certified for North American Standards

### **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### **IK RATING**

above the surface)

IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) $$

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)  $\,$