

BIONIQ SQUARE ADJUSTABLE COMFORT
TRIMLESS

A35212-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Ceiling Thickness	Reflector Options
-------------	----------------	----------------------	-----------------------	------------------------	----------------------	----------------------	----------------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL
Series: Bioniq
Subseries: Bioniq Square Adjustable Comfort
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL
Shape: Square
Length (mm): 106
Length (in): 4 3/16
Width (mm): 106
Width (in): 4 3/16
Height (mm): 134
Height (in): 5 1/4
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1
Min. Recessing Depth (mm): 150
Min. Recessing Depth (in): 5 7/8
Light Distribution: Adjustable / Downlight
Weight (kg): 0.655
Weight (lbs): 1.44
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 120mm / 4 3/4" x 120mm / 4 3/4"
Upon Request: Unique Ceiling Thickness

ELECTRICAL
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 15.5
Total Output Wattage (W): 14.5
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Recessed Housing
Driver Type: Constant Current - Universal
Driver Class: Class 2
Housing: See components
Input Voltage (V): 120 - 277
Constant Current (MA): 500



LED
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 940 / 980 / 1029 / 1050
Nominal Lumen (lm): 1386 / 1438 / 1511 / 1542
CRI: >90 CRI
Efficiency (%): 87.9 / 88.4 / 87.9
Lamp Life (hrs): 50000
Upon Request: RGB-W Tunable White Special Color Temperature
Special LED

OPTICAL
Reflector*: 20 / 40 / 60
Adjustability: Rotational 355°; Tilt 30°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS
Zaneen Inc. © 2022, 10000 88-3382, F 416-247-9319, www.zaneen.com

Available for international specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
Certified By: Certified for North American Standards
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com
IP rating: IP20


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

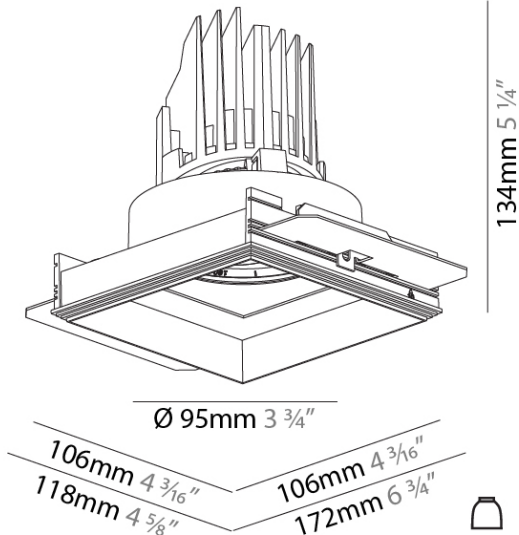

BIONIQ SQUARE ADJUSTABLE COMFORT
TRIMLESS

A35212-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

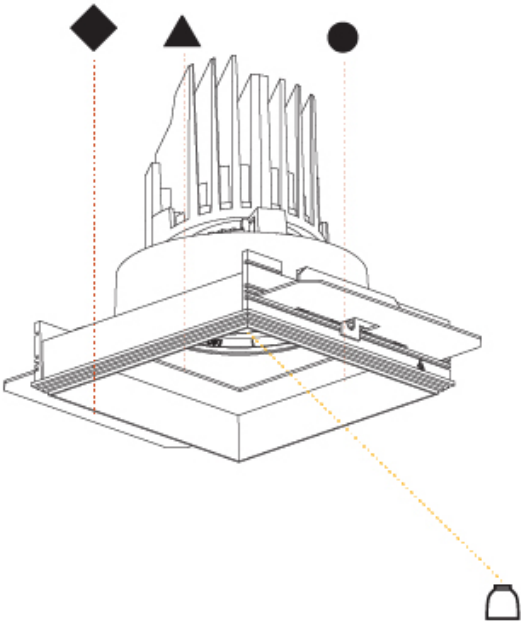

BIONIQ SQUARE ADJUSTABLE COMFORT
TRIMLESS

A35215-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Ceiling Thickness
-------------	----------------	----------------------	-----------------------	------------------------	----------------------	----------------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq
Subseries: Bioniq Square Adjustable Comfort
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Square
Length (mm): 106
Length (in): 4 3/16
Width (mm): 106
Width (in): 4 3/16
Height (mm): 134
Height (in): 5 1/4
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1
Min. Recessing Depth (mm): 150
Min. Recessing Depth (in): 5 7/8
Light Distribution: Adjustable / Downlight
Weight (kg): 0.655
Weight (lbs): 1.44
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 120mm / 4 3/4" x 120mm / 4 3/4"
Upon Request: Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 13.2 / 16.5
Total Output Wattage (W): 12.1 / 14.7
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Recessed Housing
Driver Type: Constant Current - Universal
Driver Class: Class 2
Housing: See components
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 850 / 950 / 1019 / 1040
Nominal Lumen (lm): 960 / 1070 / 1156 / 1180
CRI: >90 CRI
Efficiency (%): 88.5
Lamp Life (hrs): 50000
Upon Request: RGB-W Tunable White Special Color Temperature
Special LED

OPTICAL



Reflector°: 10
Adjustability: Rotational 355°; Tilt 30°
Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Zaneen Lighting Inc. © 2022, 1000-880-3382, F 416-247-9319, www.zaneen.com

Available for international specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com
IP rating: IP20


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

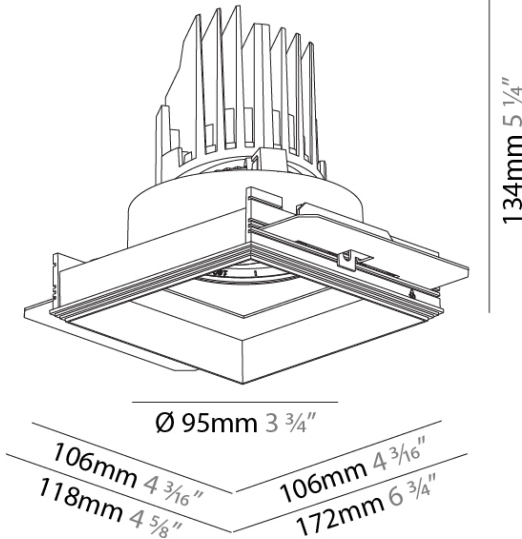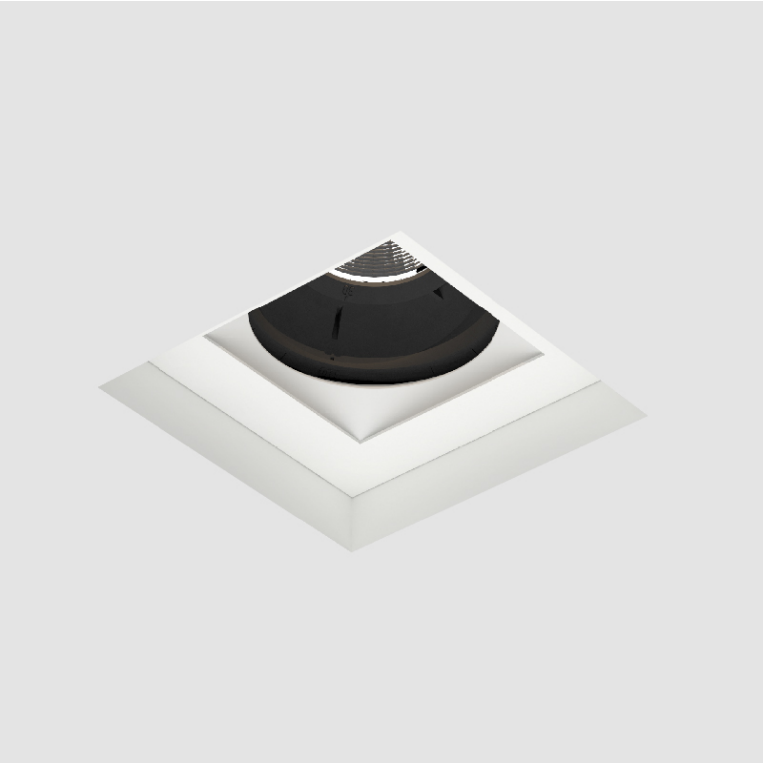

BIONIQ SQUARE ADJUSTABLE COMFORT
TRIMLESS

A35215-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

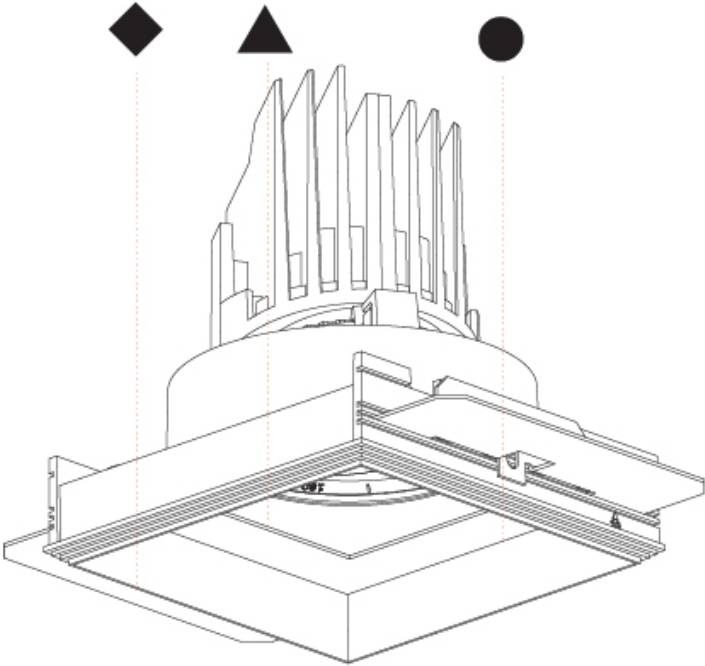

BIONIQ SQUARE ADJUSTABLE COMFORT
RECESSED

A35362-

base number

Color
Temperature

Finishes
(Diamond)

Finishes
(Triangle)

Finishes
(Circle)

Reflector
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq

Subseries: Bioniq Square Adjustable Comfort

Brand: Prolight

Division: Architectural

Mounting Type: Recessed

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Square

Length (mm): 119

Length (in): 4 11⁄16

Width (mm): 119

Width (in): 4 11⁄16

Depth (mm): 132

Depth (in): 5 3⁄16

Ceiling Thickness (mm): 10 / 12.5 / 15

Ceiling Thickness (in): 3⁄8 or 1⁄2 or 9⁄16

Min. Recessing Depth (mm): 150

Min. Recessing Depth (in): 5 7⁄8

Light Distribution: Adjustable / Downlight

Weight (kg): 0.607

Weight (lbs): 1.34

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 114mm / 4 1⁄2" x 114mm / 4 1⁄2"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 16.5

Total Output Wattage (W): 14

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 940 / 980 / 1029 / 1050

Nominal Lumen (lm): 1386 / 1438 / 1511 / 1542

CRI: >90 CRI

OPTICAL

Reflector°: 20 / 40 / 60

Adjustability: Rotational 355°; Tilt 30°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

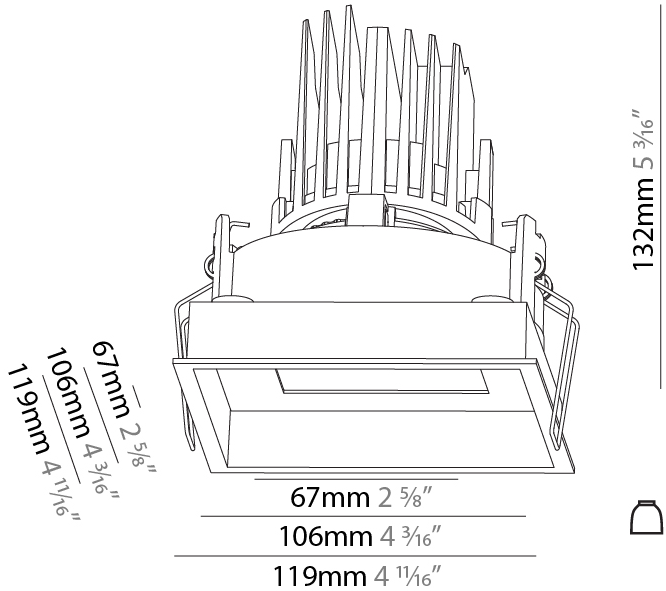


BIONIQ SQUARE ADJUSTABLE COMFORT
RECESSED

A35362-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

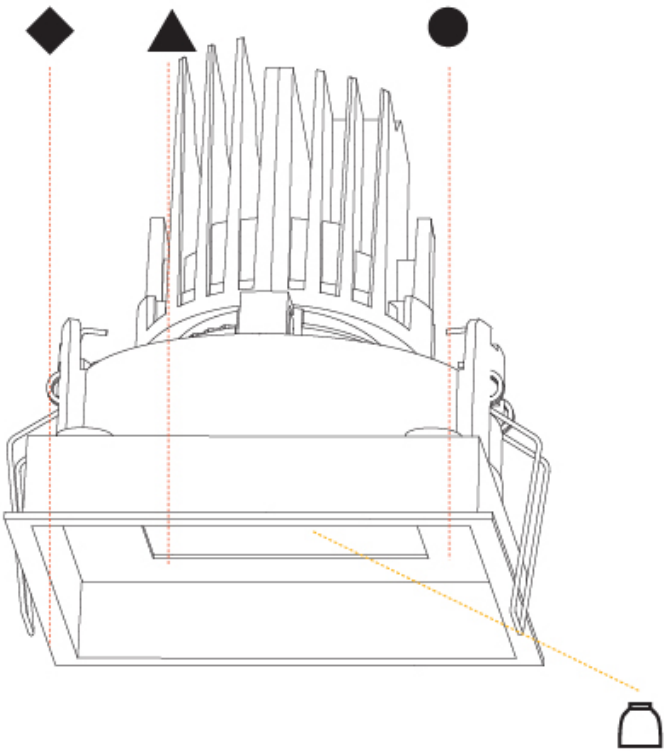

Color Temperature	27K	35K	30K	40K	°K
	2700K	3500K	3000K	4000K	
Reflector	20	40	60		
	20°	40°	60°		

ORDER-EXAMPLE: °K

L3XXXX- 02 02 02 30K 20

Black Black Black 3000K 20°



BIONIQ SQUARE ADJUSTABLE COMFORT
RECESSED

A35365-

base number

Color
Temperature

Finishes
(Diamond)

Finishes
(Triangle)

Finishes
(Circle)

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq

Subseries: Bioniq Square Adjustable Comfort

Brand: Prolight

Division: Architectural

Mounting Type: Recessed

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Square

Length (mm): 119

Length (in): 4 11⁄16

Width (mm): 119

Width (in): 4 11⁄16

Depth (mm): 132

Depth (in): 5 3⁄16

Ceiling Thickness (mm): 10 / 12.5 / 15

Ceiling Thickness (in): 3⁄8 or 1⁄2 or 9⁄16

Min. Recessing Depth (mm): 150

Min. Recessing Depth (in): 5 7⁄8

Light Distribution: Adjustable / Downlight

Weight (kg): 0.608

Weight (lbs): 1.34

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 114mm / 4 1⁄2" x 114mm / 4 1⁄2"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 13.2 / 16.5

Total Output Wattage (W): 12 / 14

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See components

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 850 / 950 / 1029 / 1050

Nominal Lumen (lm): 960 / 1070 / 1156 / 1180

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 10

Adjustability: Rotational 355°; Tilt 30°

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

7000lm 1000lm 1500lm 2000lm 2500lm 3000lm 3500lm 4000lm 4500lm 5000lm 5500lm 6000lm 6500lm 7000lm 7500lm 8000lm 8500lm 9000lm 9500lm 10000lm 10500lm 11000lm 11500lm 12000lm 12500lm 13000lm 13500lm 14000lm 14500lm 15000lm 15500lm 16000lm 16500lm 17000lm 17500lm 18000lm 18500lm 19000lm 19500lm 20000lm 20500lm 21000lm 21500lm 22000lm 22500lm 23000lm 23500lm 24000lm 24500lm 25000lm 25500lm 26000lm 26500lm 27000lm 27500lm 28000lm 28500lm 29000lm 29500lm 30000lm 30500lm 31000lm 31500lm 32000lm 32500lm 33000lm 33500lm 34000lm 34500lm 35000lm 35500lm 36000lm 36500lm 37000lm 37500lm 38000lm 38500lm 39000lm 39500lm 40000lm 40500lm 41000lm 41500lm 42000lm 42500lm 43000lm 43500lm 44000lm 44500lm 45000lm 45500lm 46000lm 46500lm 47000lm 47500lm 48000lm 48500lm 49000lm 49500lm 50000lm 50500lm 51000lm 51500lm 52000lm 52500lm 53000lm 53500lm 54000lm 54500lm 55000lm 55500lm 56000lm 56500lm 57000lm 57500lm 58000lm 58500lm 59000lm 59500lm 60000lm 60500lm 61000lm 61500lm 62000lm 62500lm 63000lm 63500lm 64000lm 64500lm 65000lm 65500lm 66000lm 66500lm 67000lm 67500lm 68000lm 68500lm 69000lm 69500lm 70000lm 70500lm 71000lm 71500lm 72000lm 72500lm 73000lm 73500lm 74000lm 74500lm 75000lm 75500lm 76000lm 76500lm 77000lm 77500lm 78000lm 78500lm 79000lm 79500lm 80000lm 80500lm 81000lm 81500lm 82000lm 82500lm 83000lm 83500lm 84000lm 84500lm 85000lm 85500lm 86000lm 86500lm 87000lm 87500lm 88000lm 88500lm 89000lm 89500lm 90000lm 90500lm 91000lm 91500lm 92000lm 92500lm 93000lm 93500lm 94000lm 94500lm 95000lm 95500lm 96000lm 96500lm 97000lm 97500lm 98000lm 98500lm 99000lm 99500lm 100000lm 100500lm 101000lm 101500lm 102000lm 102500lm 103000lm 103500lm 104000lm 104500lm 105000lm 105500lm 106000lm 106500lm 107000lm 107500lm 108000lm 108500lm 109000lm 109500lm 110000lm 110500lm 111000lm 111500lm 112000lm 112500lm 113000lm 113500lm 114000lm 114500lm 115000lm 115500lm 116000lm 116500lm 117000lm 117500lm 118000lm 118500lm 119000lm 119500lm 120000lm 120500lm 121000lm 121500lm 122000lm 122500lm 123000lm 123500lm 124000lm 124500lm 125000lm 125500lm 126000lm 126500lm 127000lm 127500lm 128000lm 128500lm 129000lm 129500lm 130000lm 130500lm 131000lm 131500lm 132000lm 132500lm 133000lm 133500lm 134000lm 134500lm 135000lm 135500lm 136000lm 136500lm 137000lm 137500lm 138000lm 138500lm 139000lm 139500lm 140000lm 140500lm 141000lm 141500lm 142000lm 142500lm 143000lm 143500lm 144000lm 144500lm 145000lm 145500lm 146000lm 146500lm 147000lm 147500lm 148000lm 148500lm 149000lm 149500lm 150000lm 150500lm 151000lm 151500lm 152000lm 152500lm 153000lm 153500lm 154000lm 154500lm 155000lm 155500lm 156000lm 156500lm 157000lm 157500lm 158000lm 158500lm 159000lm 159500lm 160000lm 160500lm 161000lm 161500lm 162000lm 162500lm 163000lm 163500lm 164000lm 164500lm 165000lm 165500lm 166000lm 166500lm 167000lm 167500lm 168000lm 168500lm 169000lm 169500lm 170000lm 170500lm 171000lm 171500lm 172000lm 172500lm 173000lm 173500lm 174000lm 174500lm 175000lm 175500lm 176000lm 176500lm 177000lm 177500lm 178000lm 178500lm 179000lm 179500lm 180000lm 180500lm 181000lm 181500lm 182000lm 182500lm 183000lm 183500lm 184000lm 184500lm 185000lm 185500lm 186000lm 186500lm 187000lm 187500lm 188000lm 188500lm 189000lm 189500lm 190000lm 190500lm 191000lm 191500lm 192000lm 192500lm 193000lm 193500lm 194000lm 194500lm 195000lm 195500lm 196000lm 196500lm 197000lm 197500lm 198000lm 198500lm 199000lm 199500lm 200000lm 200500lm 201000lm 201500lm 202000lm 202500lm 203000lm 203500lm 204000lm 204500lm 205000lm 205500lm 206000lm 206500lm 207000lm 207500lm 208000lm 208500lm 209000lm 209500lm 210000lm 210500lm 211000lm 211500lm 212000lm 212500lm 213000lm 213500lm 214000lm 214500lm 215000lm 215500lm 216000lm 216500lm 217000lm 217500lm 218000lm 218500lm 219000lm 219500lm 220000lm 220500lm 221000lm 221500lm 222000lm 222500lm 223000lm 223500lm 224000lm 224500lm 225000lm 225500lm 226000lm 226500lm 227000lm 227500lm 228000lm 228500lm 229000lm 229500lm 230000lm 230500lm 231000lm 231500lm 232000lm 232500lm 233000lm 233500lm 234000lm 234500lm 235000lm 235500lm 236000lm 236500lm 237000lm 237500lm 238000lm 238500lm 239000lm 239500lm 240000lm 240500lm 241000lm 241500lm 242000lm 242500lm 243000lm 243500lm 244000lm 244500lm 245000lm 245500lm 246000lm 246500lm 247000lm 247500lm 248000lm 248500lm 249000lm 249500lm 250000lm 250500lm 251000lm 251500lm 252000lm 252500lm 253000lm 253500lm 254000lm 254500lm 255000lm 255500lm 256000lm 256500lm 257000lm 257500lm 258000lm 258500lm 259000lm 259500lm 260000lm 260500lm 261000lm 261500lm 262000lm 262500lm 263000lm 263500lm 264000lm 264500lm 265000lm 265500lm 266000lm 266500lm 267000lm 267500lm 268000lm 268500lm 269000lm 269500lm 270000lm 270500lm 271000lm 271500lm 272000lm 272500lm 273000lm 273500lm 274000lm 274500lm 275000lm 275500lm 276000lm 276500lm 277000lm 277500lm 278000lm 278500lm 279000lm 279500lm 280000lm 280500lm 281000lm 281500lm 282000lm 282500lm 283000lm 283500lm 284000lm 284500lm 285000lm 285500lm 286000lm 286500lm 287000lm 287500lm 288000lm 288500lm 289000lm 289500lm 290000lm 290500lm 291000lm 291500lm 292000lm 292500lm 293000lm 293500lm 294000lm 294500lm 295000lm 295500lm 296000lm 296500lm 297000lm 297500lm 298000lm 298500lm 299000lm 299500lm 300000lm 300500lm 301000lm 301500lm 302000lm 302500lm 303000lm 303500lm 304000lm 304500lm 305000lm 305500lm 306000lm 306500lm 307000lm 307500lm 308000lm 308500lm 309000lm 309500lm 310000lm 310500lm 311000lm 311500lm 312000lm 312500lm 313000lm 313500lm 314000lm 314500lm 315000lm 315500lm 316000lm 316500lm 317000lm 317500lm 318000lm 318500lm 319000lm 319500lm 320000lm 320500lm 321000lm 321500lm 322000lm 322500lm 323000lm 323500lm 324000lm 324500lm 325000lm 325500lm 326000lm 326500lm 327000lm 327500lm 328000lm 328500lm 329000lm 329500lm 330000lm 330500lm 331000lm 331500lm 332000lm 332500lm 333000lm 333500lm 334000lm 334500lm 335000lm 335500lm 336000lm 336500lm 337000lm 337500lm 338000lm 338500lm 339000lm 339500lm 340000lm 340500lm 341000lm 341500lm 342000lm 342500lm 343000lm 343500lm 344000lm 344500lm 345000lm 345500lm 346000lm 346500lm 347000lm 347500lm 348000lm 348500lm 349000lm 349500lm 350000lm 350500lm 351000lm 351500lm 352000lm 352500lm 353000lm 353500lm 354000lm 354500lm 355000lm 355500lm 356000lm 356500lm 357000lm 357500lm 358000lm 358500lm 359000lm 359500lm 360000lm 360500lm 361000lm 361500lm 362000lm 362500lm 363000lm 363500lm 364000lm 364500lm 365000lm 365500lm 366000lm 366500lm 367000lm 367500lm 368000lm 368500lm 369000lm 369500lm 370000lm 370500lm 371000lm 371500lm 372000lm 372500lm 373000lm 373500lm 374000lm 374500lm 375000lm 375500lm 376000lm 376500lm 377000lm 377500lm 378000lm 378500lm 379000lm 379500lm 380000lm 380500lm 381000lm 381500lm 382000lm 382500lm 383000lm 383500lm 384000lm 384500lm 385000lm 385500lm 386000lm 386500lm 387000lm 387500lm 388000lm 388500lm 389000lm 389500lm 390000lm 390500lm 391000lm 391500lm 392000lm 392500lm 393000lm 393500lm 394000lm 394500lm 395000lm 395500lm 396000lm 396500lm 397000lm 397500lm 398000lm 398500lm 399000lm 399500lm 400000lm 400500lm 401000lm 401500lm 402000lm 402500lm 403000lm 403500lm 404000lm 404500lm 405000lm 405500lm 406000lm 406500lm 407000lm 407500lm 408000lm 408500lm 409000lm 409500lm 410000lm 410500lm 411000lm 411500lm 412000lm 412500lm 413000lm 413500lm 414000lm 414500lm 415000lm 415500lm 416000lm 416500lm 417000lm 417500lm 418000lm 418500lm 419000lm 419500lm 420000lm 420500lm 421000lm 421500lm 422000lm 422500lm 423000lm 423500lm 424000lm 424500lm 425000lm 425500lm 426000lm 426500lm 427000lm 427500lm 428000lm 428500lm 429000lm 429500lm 430000lm 430500lm 431000lm 431500lm 432000lm 432500lm 433000lm 433500lm 434000lm 434500lm 435000lm 435500lm 436000lm 436500lm 437000lm 437500lm 438000lm 438500lm 439000lm 439500lm 440000lm 440500lm 441000lm 441500lm 442000lm 442500lm 443000lm 443500lm 444000lm 444500lm 445000lm 445500lm 446000lm 446500lm 447000lm 447500lm 448000lm 448500lm 449000lm 449500lm 450000lm 450500lm 451000lm 451500lm 452000lm 452500lm 453000lm 453500lm 454000lm 454500lm 455000lm 455500lm 456000lm 456500lm 457000lm 457500lm 458000lm 458500lm 459000lm 459500lm 460000lm 460500lm 461000lm 461500lm 462000lm 462500lm 463000lm 463500lm 464000lm 464500lm 465000lm 465500lm 466000lm 466500lm 467000lm 467500lm 468000lm 468500lm 469000lm 469500lm 470000lm 470500lm 471000lm 471500lm 472000lm 472500lm 473000lm 473500lm 474000lm 474500lm 475000lm 475500lm 476000lm 476500lm 477000lm 477500lm 478000lm 478500lm 479000lm 479500lm 480000lm 480500lm 481000lm 481500lm 482000lm 482500lm 483000lm 483500lm 484000lm 484500lm 485000lm 485500lm 486000lm 486500lm 487000lm 487500lm 488000lm 488500lm 489000lm 489500lm 490000lm 490500lm 491000lm 491500lm 492000lm 492500lm 493000lm 493500lm 494000lm 494500lm 495000lm 495500lm 496000lm 496500lm 497000lm 497500lm 498000lm 498500lm 499000lm 499500lm 500000lm 500500lm 501000lm 501500lm 502000lm 502500lm 503000lm 503500lm 504000lm 504500lm 505000lm 505500lm 506000lm 506500lm 507000lm 507500lm 508000lm 508500lm 509000lm 509500lm 510000lm 510500lm 511000lm 511500lm 512000lm 512500lm 513000lm 513500lm 514000lm 514500lm 515000lm 515500lm 516000lm 516500lm 517000lm 517500lm 518000lm 518500lm 519000lm 519500lm 520000lm 520500lm 521000lm 521500lm 522000lm 522500lm 523000lm 523500lm 524000lm 524500lm 525000lm 525500lm 526000lm 526500lm 527000lm 527500lm 528000lm 528500lm 529000lm 529500lm 530000lm 530500lm 531000lm 531500lm 532000lm 532500lm 533000lm 533500lm 534000lm 534500lm 535000lm 535500lm 536000lm 536500lm 537000lm 537500lm 538000lm 538500lm 539000lm 539500lm 540000lm 540500lm 541000lm 541500lm 542000lm 542500lm 543000lm 543500lm 544000lm 544500lm 545000lm 545500lm 546000lm 546500lm 547000lm 547500lm 548000lm 548500lm 549000lm 549500lm 550000lm 550500lm 551000lm 551500lm 552000lm 552500lm 553000lm 553500lm 554000lm 554500lm 555000lm 555500lm 556000lm 556500lm 557000lm 557500lm 558000lm 558500lm 559000lm 559500lm 560000lm 560500lm 561000lm 561500lm 562000lm 562500lm 563000lm 563500lm 564000lm 564500lm 565000lm 565500lm 566000lm 566500lm 567000lm 567500lm 568000lm 568500lm 569000lm 569500lm 570000lm 570500lm 571000lm 571500lm 572000lm 572500lm 573000lm 573500lm 574000lm 574500lm 575000lm 575500lm 576000lm 576500lm 577000lm 577500lm 578000lm 578500lm 579000lm 579500lm 580000lm 580500lm 581000lm 581500lm 582000lm 582500lm 583000lm 583500lm 584000lm 584500lm 585000lm 585500lm 586000lm 586500lm 587000lm 587500lm 588000lm 588500lm 589000lm 589500lm 590000lm 590500lm 591000lm 591500lm 592000lm 592500lm 593000lm 593500lm 594000lm 594500lm 595000lm 595500lm 596000lm 596500lm 597000lm 597500lm 598000lm 598500lm 599000lm 599500lm 600000lm 600500lm 601000lm 601500lm 602000lm 602500lm 603000lm 603500lm 604000lm 604500lm 605000lm 605500lm 606000lm 606500lm 607000lm 607500lm 608000lm 608500lm 609000lm 609500lm 610000lm 610500lm 611000lm 611500lm 612000lm 612500lm 613000lm 613500lm 614000lm 614500lm 615000lm 615500lm 616000lm 616500lm 617000lm 617500lm 618000lm 618500lm 619000lm 619500lm 620000lm 620500lm 621000lm 621500lm 622000lm 622500lm 623000lm 623500lm 624000lm 624500lm 625000lm 625500lm 626000lm 626500lm 627000lm 627500lm 628000lm 628500lm 629000lm 629500lm 630000lm 630500lm 631000lm 631500lm 632000lm 632500lm 633000lm 633500lm 634000lm 634500lm 635000lm 635500lm 636000lm 636500lm 637000lm 637500lm 638000lm 638500lm 639000lm 639500lm 640000lm 640500lm 641000lm 641500lm 642000lm 642500lm 643000lm 643500lm 644000lm 644500lm 645000lm 645500lm 646000lm 646500lm 647000lm 647500lm 648000lm 648500lm 649000lm 649500lm 650000lm 650500lm 651000lm 651500lm 652000lm 652500lm 653000lm 653500lm 654000lm 654500lm 655000lm 655500lm 656000lm 656500lm 657000lm 657500lm 658000lm 658500lm 659000lm 659500lm 660000lm 660500lm 661000lm 661500lm 662000lm 662500lm 663000lm 663500lm 664000lm 664500lm 665000lm 665500lm 666000lm 666500lm 667000lm 667500lm 668000lm 668500lm 669000lm 669500lm 670000lm 670500lm 671000lm 671500lm 672000lm 672500lm 673000lm 673500lm 674000lm 674500lm 675000lm 675500lm 676000lm 676500lm 677000lm 677500lm 678000lm 678500lm 679000lm 679500lm 680000lm 680500lm 681000lm 681500lm 682000lm 682500lm 683000lm 683500lm 684000lm 684500lm 685000lm 685500lm 686000lm 686500lm 687000lm 687500lm 688000lm 688500lm 689000lm 689500lm 690000lm 690500lm 691000lm 691500lm 692000lm 692500lm 693000lm 693500lm 694000lm 694500lm 695000lm 695500lm 696000lm 696500lm 697000lm 697500lm 698000lm 698500lm 699000lm 699500lm 700000lm 700500lm 701000lm 701500lm 702000lm 702500lm 703000lm 703500lm 704000lm 704500lm 705000lm 705500lm 706000lm 706500lm 707000lm 707500lm 70

BIONIQ SQUARE ADJUSTABLE COMFORT
RECESSED

A35365-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

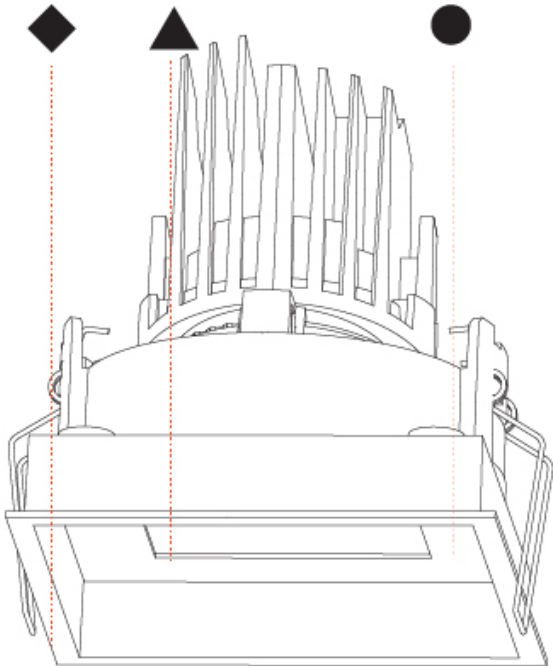

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish

Sparkling Silver - 01 (SSR) 	Black Velvet - 02 (BKV) 	Crystal White - 03 (CWI) 	Creamy - 04 (CRY) 	Hampton Bay - 05 (HAB) 	Lagoon - 06 (LAG) 
Urban Forest - 07 (UFT) 	In the Army - 08 (ITA) 	Rusty Angel - 09 (RUA) 	Rusty Rush - 10 (RUR) 	Milk and Chocolate - 11 (MIC) 	Fade to Gray - 12 (FTG) 
Mysterious Gray - 13 (MYG) 	Twilight - 14 (TWT) 	Lost Dream - 15 (LOD) 	Purple Sky - 16 (PUS) 	Fresh Oh - 17 (FRO) 	Funky P. - 18 (FUP) 
Kissing Aphrodite - 19 (KIA) 	Poseidon's Paradise - 20 (POP) 	Blue Sky - 21 (BLS) 	Spring Green - 22 (SPG) 	Mellow Yellow - 23 (MEY) 	Golden Heart - 24 (GOH) 
Gun Metal - 25 (GUM) 	Champagne Cream - 26 (CHC) 	Copper Mine - 27 (COM) 	Ancient Bronze - 28 (ABZ) 	Jazz Gold - 29 (JAG) 	Olive Breeze - 30 (OBR) 
Moonlight Silver - 31 (MOS) 	Rosewood Red - 32 (ROR) 				

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between devices.
Physical: When texture is involved, there will be variations in color, character and tone within a product and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles to ensure a highly individual effect and no luminaire being identical.
Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)