

D54006-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	_
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table	
PHYSICAL	
Shape: Cylinder	
Diameter (mm): 380	
Diameter (in): 14 ¹⁵ / ₁₆	
Height (mm): 700	
Height (in): 27 %	
Light Distribution: Direct	
Diffuser: Cotton Shade	
Fixture Finish: WHI / BLK	
Fixture Material: Metal	
Upon Request: Bolt Down	
ELECTRICAL	


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

 rating ID20			












D54006-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

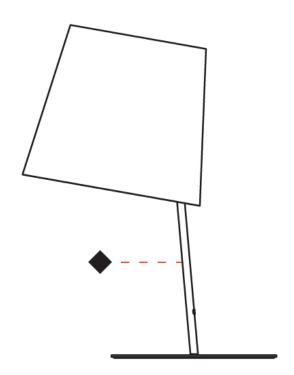





D54007-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 ½
Height (mm): 440
Height (in): 17 ⁵ / ₁₆
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54007-

ROJECT	
YPE	
PECIFIER	
UANTITY	_
ATE	







D54008-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	
PHYSICAL	
Character Coding days	

Mounting Type: Portable
Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 $\frac{1}{1_{16}}$
Height (mm): 510
Height (in): 20 ½
Extension (mm): 740
Extension (in): 29 ½
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

opon request. Bott bown
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54008-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

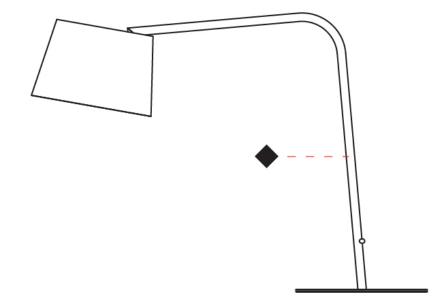





D54009-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

Mounting Location: Floor	
Subcategory: Floor	
PHYSICAL	
Shape: Abstract	
Diameter (mm): 380	
Diameter (in): 14 ¹⁵ / ₁₆	
Height (mm): 1700	
Height (in): 66 15/16	
Light Distribution: Direct	
Diffuser: Cotton Shade	
Fixture Finish: WHI / BLK	
Holder Finish: WHI / BLK	
Fixture Material: Metal	
Upon Request: Bolt Down	
ELECTRICAL	

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 12
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





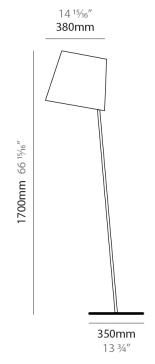






D54009-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

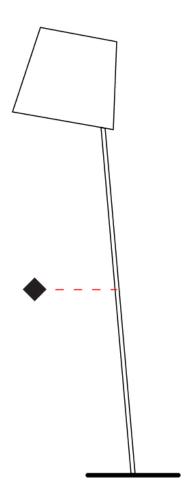





D54010-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

2111010111 2 201611
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Abstract
Diameter (mm): 380
Diameter (in): 14 15/16
Height (mm): 1840
Height (in): 72 ⁷ / ₁₆
Extension (mm): 1920
Extension (in): 75 $\frac{9}{16}$
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 12
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE










D54010-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

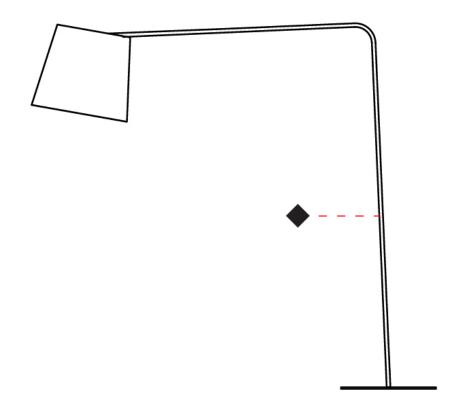





D54046-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 380
Diameter (in): 14 ¹⁵ / ₁₆
Height (mm): 700
Height (in): 27 ⁹ / ₁₆
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
FLECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54046-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

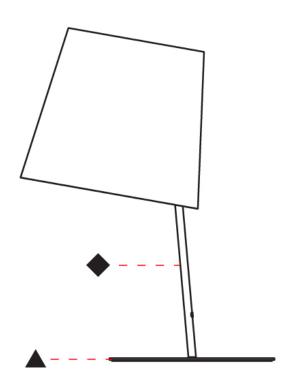





D54047-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table

Subcategory, rable
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 ½ 1/16
Height (mm): 440
Height (in): 17 ⁵ / ₁₆
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	


LED

OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54047-









D54048-

base number Fini

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Mounting Type: Portable
Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 $\frac{1}{1_{16}}$
Height (mm): 510
Height (in): 20 ½
Extension (mm): 740
Extension (in): 29 1/8
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL


ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

	certified by. certified for Mortiff fillefied in Standards	
-		۱
	D ti ID20	

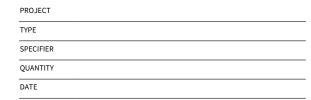






740mm 29 1/8"





D54048-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

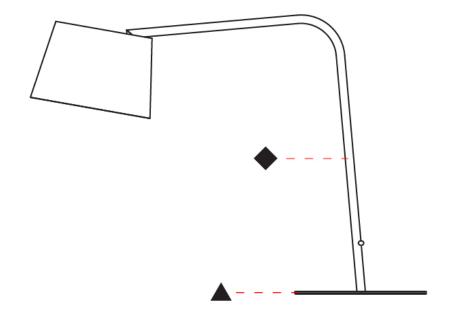





D54049-

base number F

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

mountaing Education 1 to 01
Subcategory: Floor
PHYSICAL
Shape: Abstract
Diameter (mm): 380
Diameter (in): 14 ¹⁵ / ₁₆
Height (mm): 1700
Height (in): 66 ¹⁵ / ₁₆
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 12	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Cer	tified	By: Certified for North American Standards





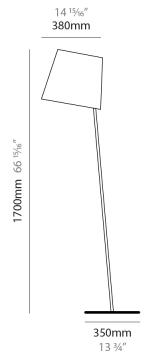






D54049-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

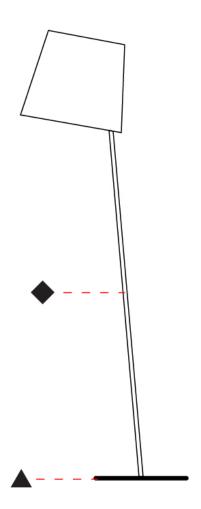





D54051-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Excentrica
	Brand: Fambuena
	Division: Design
	Mounting Type: Portable
	Mounting Location: Floor
	Subcategory: Floor

Subcategory: Floor	
PHYSICAL	
Shape: Cylinder	
Diameter (mm): 230	
Diameter (in): 9 ½	
Height (mm): 1350	
Height (in): 53 1/8	
Light Distribution: Direct	
Diffuser: Cotton Shade	
Fixture Finish: BRA / PWT	
Holder Finish: BLM / WHM	
Fixture Material: Metal / Marble	

EL ECTDICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54051-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	
ATE	

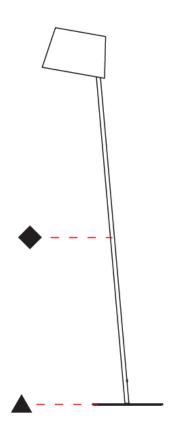





EXCENTRICA

COLOR FINISH CHART

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Fixture Finish









Holder Finish









Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





EXCENTRICA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

					special LED (upon request) PGB_PGBW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ←,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C. CO	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	շ (Մը) us	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	® :	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	②	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) $$
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) $$
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm