JULIA OVAL SUSPENSION

D101674-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Shape: Oval	
Length (mm): 1850	
Length (in): 72 ¹³ / ₁₆	
Width (mm): 600	
Width (in): 23 ½	
Height (mm): 350	
Height (in): 13 $\frac{3}{4}$	
Max. Overall Height (mm): 2350	
Max. Overall Height (in): 92 ½	
Light Distribution: Omnidirectional	
Diffuser: Stainless Steel / Brass & Transparen	t
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	
ELECTRICAL	
Number of Lamps: 8	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 32	

Lamp Base: E12 Input Voltage (V): 120

Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Max. Wattage Per Lamp (W): 4

Certified By: Certified for North American Standards IP rating: IP20

TYPE SPECIFIER QUANTITY DATE	PROJECT		
QUANTITY	ТҮРЕ		
	SPECIFIER		
DATE	QUANTITY		
	DATE		



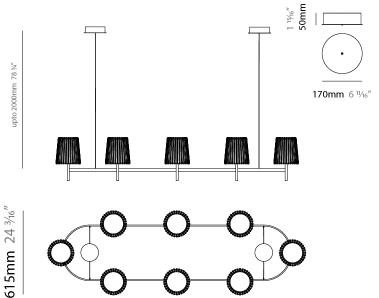

1850mm 72 ¹³/16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 1/16

JULIA OVAL SUSPENSION

D101674-

PRUJ	ECT			
TYPE				
SPEC	IFIER			
QUAN	ΝΤΙΤΥ			
DATE				

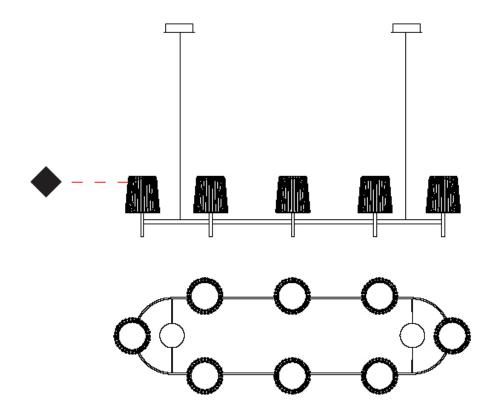

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

May 30, 2024, 4:46 pm

Page 2/16



JULIA ROUND SUSPENSION

D101747-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia
Subseries: Julia Round
Brand: Quasar
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 700
Diameter (in): 27 $\frac{1}{16}$
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 $\frac{1}{2}$
Light Distribution: Omnidirectional
Weight (kg): 10
Weight (lbs): 22.05
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			



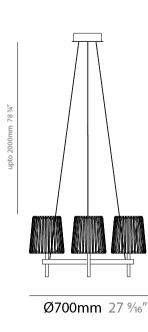



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

May 30, 2024, 4:46 pm

JULIA ROUND SUSPENSION

D101747-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

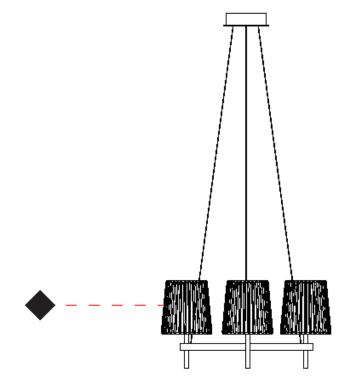



JULIA ROUND SUSPENSION

D101749-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Diameter (mm): 1000	
Diameter (in): 39 ¾	
Height (mm): 350	
Height (in): 13 ³ / ₄	
Max. Overall Height (mm): 2000	
Max. Overall Height (in): 78 $^{3}\!\!/_{\!\!\!4}$	
Light Distribution: Omnidirectional	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	
ELECTRICAL	
Number of Lamps: 6	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 24	
Max. Wattage Per Lamp (W): 4	

Input Voltage (V): 120 Lamp Voltage (V): 120

Lamp Base: E12

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			



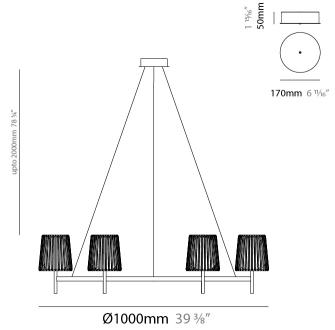

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 5/16

JULIA ROUND SUSPENSION

D101749-

PROJECT

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

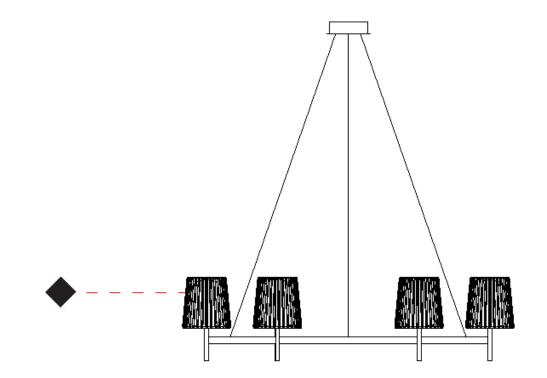

JULIA ROUND SUSPENSION

D101751-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Shape: Round	
Diameter (mm): 1300	
Diameter (in): 51 ³ / ₁₆	
Height (mm): 350	
Height (in): 13 ³ / ₄	
Max. Overall Height (mm): 2350	
Max. Overall Height (in): 92 ½	
Light Distribution: Omnidirectional	
Weight (kg): 17	
Weight (lbs): 37.48	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	
FLECTRICAL	

ELECTRICAL

Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



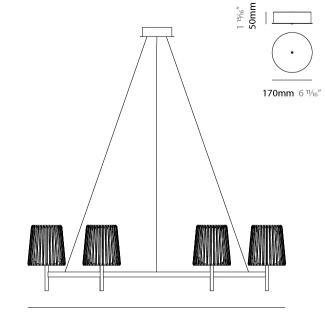

Ø1300mm 51 3/16"

upto 2000mm 78 3/4"

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 7/16

JULIA ROUND SUSPENSION

D101751-

PROJECT

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

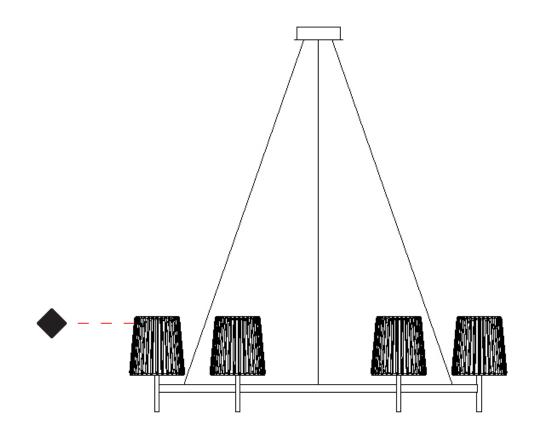

JULIA ROUND SUSPENSION

D101753-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	_
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	_
Subcategory: Ambient	
PHYSICAL	
Shape: Round	
Diameter (mm): 1600	
Diameter (in): 63	
Height (mm): 350	
Height (in): 13 ³ / ₄	_
Max. Overall Height (mm): 2350	
Max. Overall Height (in): 92 ½	_
Light Distribution: Omnidirectional	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	
ELECTRICAL	
Number of Lamps: 9	_
Lamp Type: LED	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 36	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Driver Included: No	
Input Voltage (V): 120	

LED

OPTICAL


Lamp Voltage (V): 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PF	JECT	
ΤY	1	
SF	CIFIER	
QI	NTITY	
DA	E	



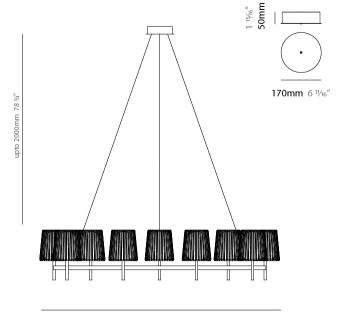

Ø1600mm 63"


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

JULIA ROUND SUSPENSION

D101753-

TYPE SPECIFIER QUANTITY DATE	PROJECT			
QUANTITY	TYPE			
	SPECIFIER			
DATE	QUANTITY			
	DATE			

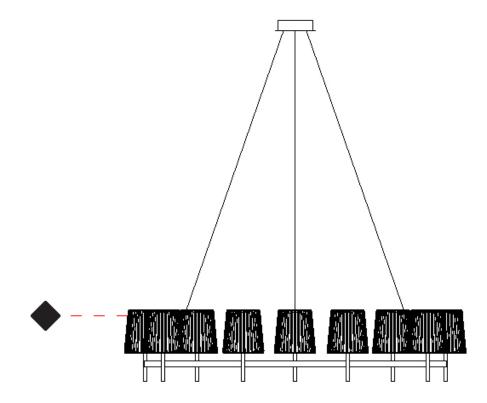

JULIA OVAL SUSPENSION

D101755-

Finish base number Options

Total Output Wattage (W): 16 Max. Wattage Per Lamp (W): 4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

Lamp Base: E12 Input Voltage (V): 120

IP rating: IP20

LED OPTICAL

Lamp Voltage (V): 120

1. To build a product code in our configurator select the specify button on the base model # product page


2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia
Subseries: Julia Oval
Brand: Quasar
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1000
Length (in): 39 ³ / ₈
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL
Number of Lamps: 4
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			



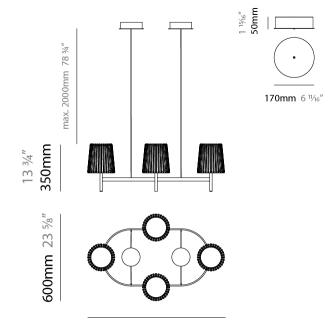

1000mm 39 3/8"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

JULIA OVAL SUSPENSION

D101755-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

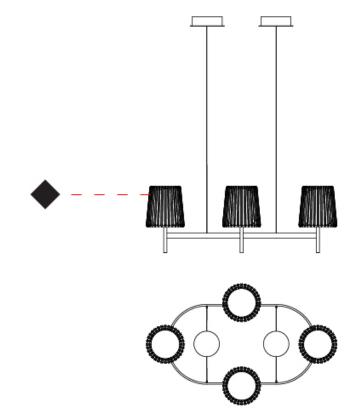

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|)

Page 12/16

JULIA CHANDELIER SUSPENSION

D101757-

Finish base number Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia
Subseries: Julia Chandelier
Brand: Quasar
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1300
Length (in): 51 ³ / ₁₆
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 ¾
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24

Lamp Base: E12

Input Voltage (V): 120 Lamp Voltage (V): 120

Max. Wattage Per Lamp (W): 4

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



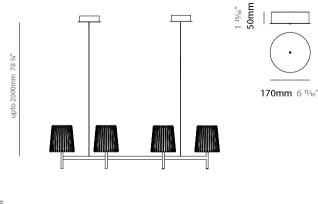



1300mm 51 ³/16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA CHANDELIER SUSPENSION

D101757-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

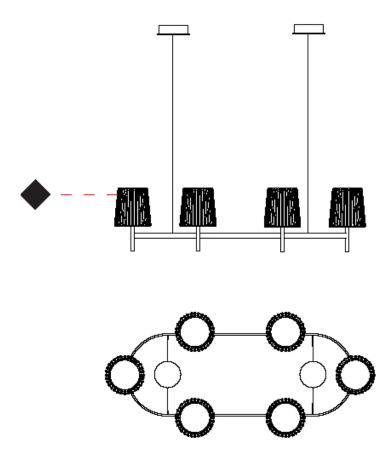

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|)



JULIA COLOR FINISH CHART

PROJECT

TYPE SPECIFIER QUANTITY DATE	PROJECT			
QUANTITY	TYPE			
	SPECIFIER			
DATE	QUANTITY			
	DATE			

Fixture Finish







Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.

JULIA

PROJECT

PROJEC

TYPE SPECIFIER

QUANTITY

DATE

LEGEND

↓	floor-mounted	¥	pivotable	\circledast	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
フ	wall and ceiling: recessed and surface mounted	U	rotating	0	warm dim / natural dimming LED
Î	ceiling-mounted and wall-mounted	Œ	illuminate tilted	Ø	rechargeable battery powered
\rightarrow	wall-mounted	P	color of suspension cable	1111 1140	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	°К	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
$\mathbf{\mathbf{x}}$	indirect light distribution	*	lens	₩.	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	318	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	٢	walk on
5	square wall or ceiling cut-out	Ċ	free individual colors 01-29	۲	drive on
୶ୖୣୣୖ୶	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
(++) M++	minimum distance (meters) lamp - object	۲	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
£	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)	(ه)	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
5	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
Ъ	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
シリ	sensor	D	direct diffuser	c (UL) us	UL Certified to UL and CSA Standards
	remote control	\odot	ball-proof (upon request)	<u>ج</u>	CSA Certified to UL and CSA Standards
2	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
КОб	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
К10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)