

D101672-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

mounting Typer outspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1300
Diameter (in): 51 ³ / ₁₆
Height (mm): 2050
Height (in): 80 11/16
Max. Overall Height (mm): 5050
Max. Overall Height (in): 198 $^{13}\!\!/_{16}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL
Number of Lamps: 9

ELECTRICAL
Number of Lamps: 9
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 36
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





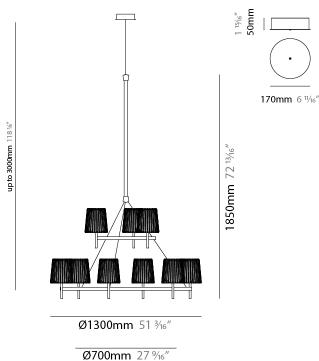






D101672-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

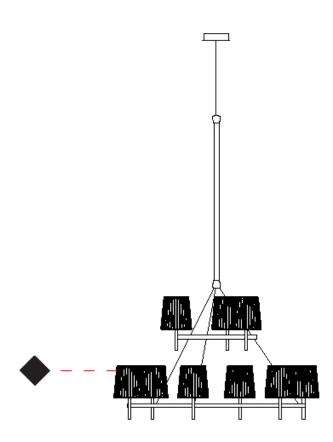





JULIA OVAL SUSPENSION

D101674-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cubaataaan Ambiant	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1850
Length (in): 72 ¹³ / ₁₆
Width (mm): 600
Width (in): $23\frac{5}{8}$
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 8
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 32
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





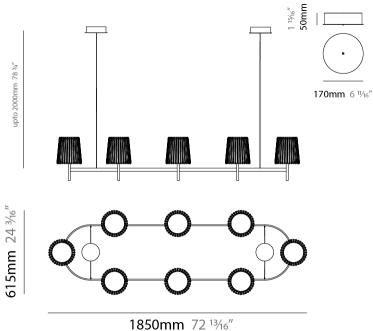






JULIA OVAL SUSPENSION

D101674-

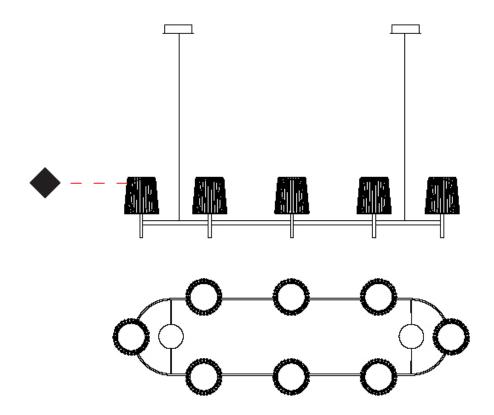





D101747-

base number

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 700
Diameter (in): 27 % 16
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Weight (kg): 10
Weight (lbs): 22.05
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 12	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS


Fixture Material: Metal
Cable Details: 2000mm Cable

Certified By: Certified for North American Standards
IP rating: IP20

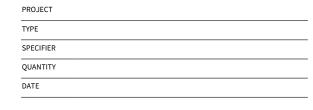












D101747-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

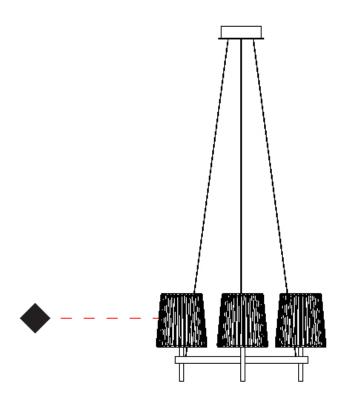





D101749-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL

Diameter (mm): 1000

Diameter (in): 39 ³ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 $\frac{3}{4}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

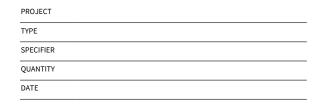










D101749-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

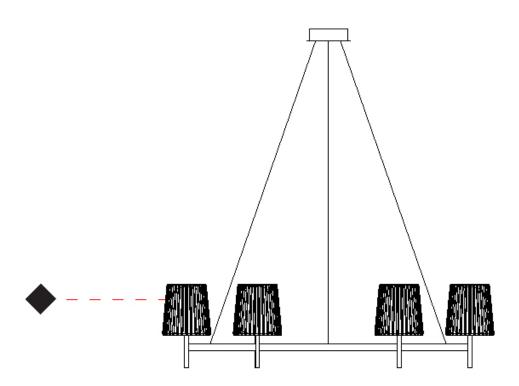





D101751-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1300
Diameter (in): 51 ³ / ₁₆
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Weight (kg): 17
Weight (lbs): 37.48
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20










D101751-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

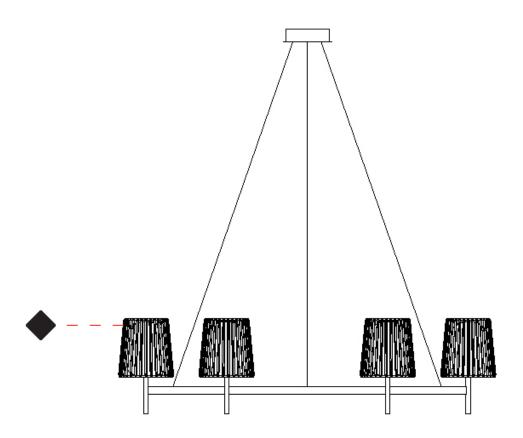



ZANEEN®

JULIA ROUND SUSPENSION

D101753-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1600
Diameter (in): 63
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL

Number of Lamps: 9
Lamp Type: LED
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 36
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Driver Included: No
Input Voltage (V): 120
Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONSCertified By: Certified for North American Standards

- - . . .

IP rating: IP20












D101753-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

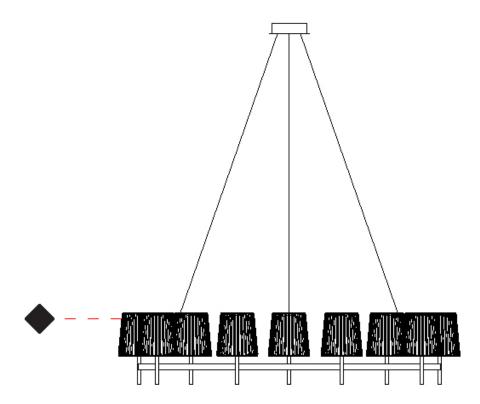



ZANEEN®

JULIA OVAL SUSPENSION

D101755-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location. Ceiting
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 $\frac{1}{2}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICA

ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 16	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20










JULIA OVAL SUSPENSION

D101755-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

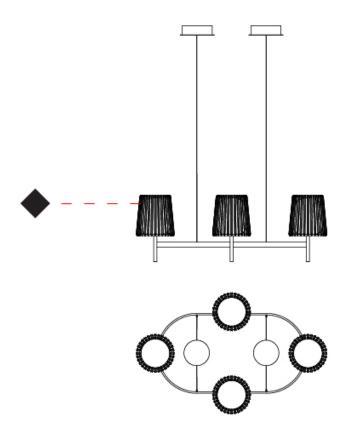





D101757-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1300
Length (in): 51 ³ / ₁₆
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 ¾
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20













D101757-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

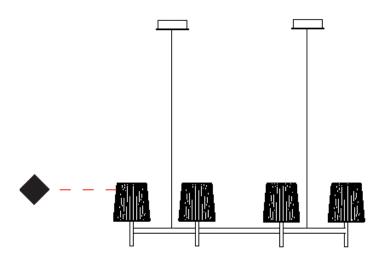







D101759-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1600
Diameter (in): 63
Height (mm): 1850
Height (in): 72 ¹³ / ₁₆
Max. Overall Height (mm): 4850
Max. Overall Height (in): 190 $^{15}\!\!/_{16}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

Cable Details: 2000mm Cable	
ELECTRICAL	
Number of Lamps: 15	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 60	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



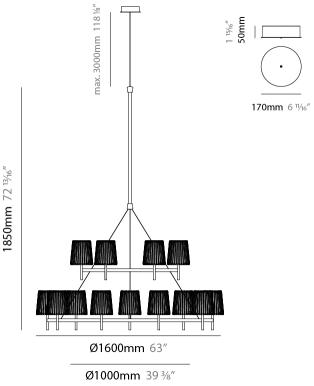






D101759-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

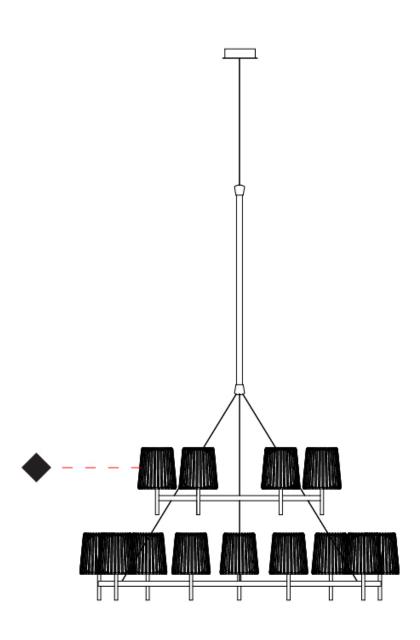






JULIA

COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.





JULIA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

				-	' LLED / DCD DCDW / LL
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution		length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
7	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ++	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ⑨	100
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
₹	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	® :	CSA Certified to UL and CSA Standards
J	available upon request	9	accessory	②	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	anaphotic (in the College of the Col
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) $$
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)