

#### D101672-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia               |  |
|-----------------------------|--|
| Subseries: Julia Chandelier |  |
| Brand: Quasar               |  |
| Division: Design            |  |
| Mounting Type: Suspension   |  |
| Mounting Location: Ceiling  |  |
| Subcategory: Ambient        |  |

| Mounting Location: Ceiling                                  |
|---|
| Subcategory: Ambient  |
| PHYSICAL  |
| Shape: Round  |
| Diameter (mm): 1300   |
| Diameter (in): 51 <sup>3</sup> / <sub>16</sub>              |
| Height (mm): 2050   |
| Height (in): 80 <sup>11</sup> / <sub>16</sub>               |
| Max. Overall Height (mm): 5050                              |
| Max. Overall Height (in): 198 <sup>13</sup> / <sub>16</sub> |
| Light Distribution: Omnidirectional                         |
| Diffuser: Stainless Steel / Brass & Transparent             |
| Fixture Finish: PCH / BRA                                   |
| Fixture Material: Metal                                     |
| Cable Details: 3000mm Cable                                 |
| ELECTRICAL  |
| Number of Lamps: 0  |


| ELECTRICAL                       |
|----------------------------------|
| Number of Lamps: 9               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 36     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |

#### LED


## OPTICAL

# RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





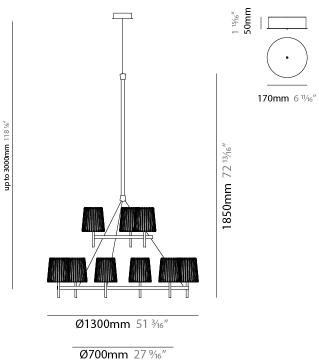






D101672-

| PROJECT   |  |  |
|-----------|--|--|
| TYPE      |  |  |
| SPECIFIER |  |  |
| QUANTITY  |  |  |
| DATE      |  |  |
|           |  |  |

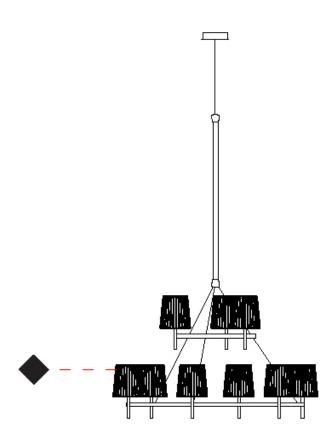





# **JULIA OVAL SUSPENSION**

#### D101674-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia              |  |
|----------------------------|--|
| Subseries: Julia Oval      |  |
| Brand: Quasar              |  |
| Division: Design           |  |
| Mounting Type: Suspension  |  |
| Mounting Location: Ceiling |  |
|                            |  |

| Mounting Location: Ceiting                      |
|---|
| Subcategory: Ambient                            |
| PHYSICAL  |
| Shape: Oval                                     |
| Length (mm): 1850                               |
| Length (in): 72 <sup>13</sup> / <sub>16</sub>   |
| Width (mm): 600                                 |
| Width (in): 23 <sup>5</sup> / <sub>8</sub>      |
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2350                  |
| Max. Overall Height (in): 92 ½                  |
| Light Distribution: Omnidirectional             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
| FLECTRICAL                                      |

| ELECTRICAL                       |
|----------------------------------|
| Number of Lamps: 8               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 32     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |
|                                  |

#### LED


#### OPTICAL

# **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

| PROJECT   |  |  |  |
|-----------|--|--|--|
| TYPE      |  |  |  |
| SPECIFIER |  |  |  |
| QUANTITY  |  |  |  |
| DATE      |  |  |  |
| DATE      |  |  |  |



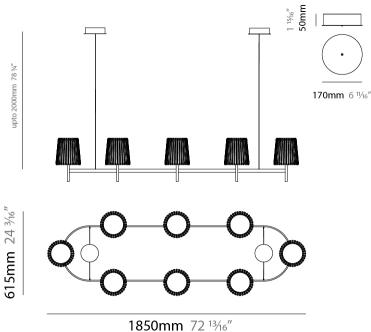






# **JULIA OVAL SUSPENSION**

D101674-

| PROJECT   |
|-----------|
| YPE       |
| SPECIFIER |
| QUANTITY  |
| DATE      |

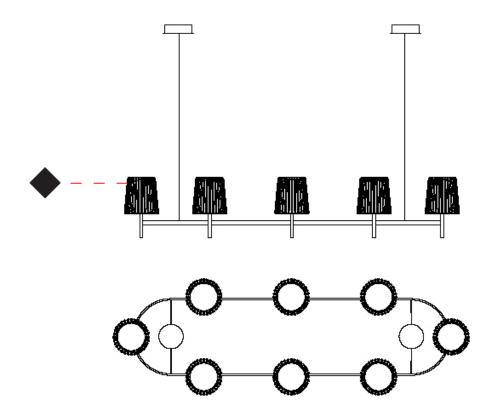





#### D101747-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia              |  |
|----------------------------|--|
| Subseries: Julia Round     |  |
| Brand: Quasar              |  |
| Division: Design           |  |
| Mounting Type: Suspension  |  |
| Mounting Location: Ceiling |  |
| Culturate and Augleiant    |  |

| Subcategory: Ambient                            |
|---|
| PHYSICAL  |
| Shape: Round                                    |
| Diameter (mm): 700                              |
| Diameter (in): 27 % 16                          |
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2350                  |
| Max. Overall Height (in): 92 ½                  |
| Light Distribution: Omnidirectional             |
| Weight (kg): 10                                 |
| Weight (lbs): 22.05                             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |


| ELECTRICAL                       |  |
|----------------------------------|--|
| Number of Lamps: 3               |  |
| Lamp Type: LED Retrofit          |  |
| Lamp Shape: B10                  |  |
| Bulb Included: Bulb Not Included |  |
| Total Output Wattage (W): 12     |  |
| Max. Wattage Per Lamp (W): 4     |  |
| Lamp Base: E12                   |  |
| Input Voltage (V): 120           |  |
| Lamp Voltage (V): 120            |  |
|                                  |  |

#### LED


# OPTICAL

#### RATINGS AND CERTIFICATIONS


Fixture Material: Metal
Cable Details: 2000mm Cable







 $\emptyset700mm$  27 %6''








D101747-

| ROJECT   |  |
|----------|--|
| YPE      |  |
| PECIFIER |  |
| UANTITY  |  |
| ATE      |  |

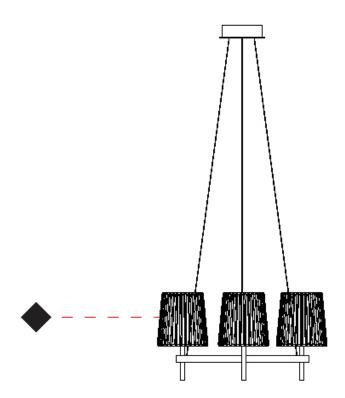





#### D101749-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$ 

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

| Series: Julia              |
|----------------------------|
| Subseries: Julia Round     |
| Brand: Quasar              |
| Division: Design           |
| Mounting Type: Suspension  |
| Mounting Location: Ceiling |
| Subcategory: Ambient       |

#### PHYSICAL

Diameter (mm): 1000

| Diameter (in): 39 <sup>3</sup> / <sub>8</sub>   |
|---|
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2000                  |
| Max. Overall Height (in): 78 3/4                |
| Light Distribution: Omnidirectional             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
|   |

#### FI FCTRICAL

Cable Details: 2000mm Cable


| ELECTRICAL                       |
|----------------------------------|
| Number of Lamps: 6               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 24     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |
|                                  |

#### LED


#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D101749-

| PROJECT   |
|-----------|
| ГҮРЕ      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

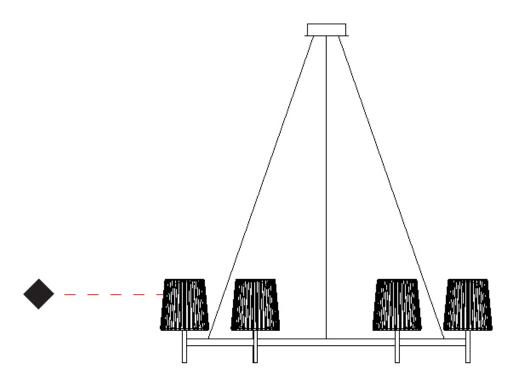





#### D101751-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia              |  |
|----------------------------|--|
| Subseries: Julia Round     |  |
| Brand: Quasar              |  |
| Division: Design           |  |
| Mounting Type: Suspension  |  |
| Mounting Location: Ceiling |  |
|                            |  |


| Subcategory: Ambient                            |
|---|
| PHYSICAL  |
| Shape: Round                                    |
| Diameter (mm): 1300                             |
| Diameter (in): 51 <sup>3</sup> / <sub>16</sub>  |
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2350                  |
| Max. Overall Height (in): 92 ½                  |
| Light Distribution: Omnidirectional             |
| Weight (kg): 17                                 |
| Weight (lbs): 37.48                             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
| ELECTRICAL                                      |

| ELECTRICAL                       |  |
|----------------------------------|--|
| Number of Lamps: 6               |  |
| Lamp Type: LED Retrofit          |  |
| Lamp Shape: B10                  |  |
| Bulb Included: Bulb Not Included |  |
| Total Output Wattage (W): 24     |  |
| Max. Wattage Per Lamp (W): 4     |  |
| Lamp Base: E12                   |  |
| Input Voltage (V): 120           |  |
| Lamp Voltage (V): 120            |  |
|                                  |  |


#### LED

# OPTICAL

# RATINGS AND CERTIFICATIONS












D101751-

| ROJECT   |   |
|----------|---|
| YPE      |   |
| PECIFIER | _ |
| QUANTITY | _ |
| ATE      |   |

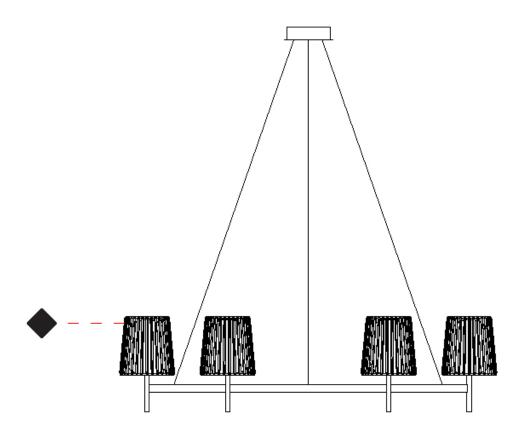



# **ZANEEN**®

# **JULIA ROUND SUSPENSION**

#### D101753-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$ 

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: J | ulia                |  |
|-----------|---------------------|--|
| Subserie  | s: Julia Round      |  |
| Brand: Q  | uasar               |  |
| Division: | Design              |  |
| Mountin   | g Type: Suspension  |  |
| Mountin   | g Location: Ceiling |  |
| <u> </u>  |                     |  |

| =   |
|---|
| Mounting Type: Suspension                       |
| Mounting Location: Ceiling                      |
| Subcategory: Ambient                            |
| PHYSICAL  |
| Shape: Round                                    |
| Diameter (mm): 1600                             |
| Diameter (in): 63                               |
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2350                  |
| Max. Overall Height (in): 92 ½                  |
| Light Distribution: Omnidirectional             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
| ELECTRICAL                                      |
| Number of Lamps: 9                              |


| LLLGTRIGHL                       |
|----------------------------------|
| Number of Lamps: 9               |
| Lamp Type: LED                   |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 36     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Driver Included: No              |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |
|                                  |

#### LED


#### OPTICAL

# RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

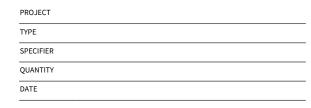










D101753-

| ROJECT   |   |
|----------|---|
| YPE      | _ |
| PECIFIER | _ |
| UANTITY  | _ |
| ATE      | _ |

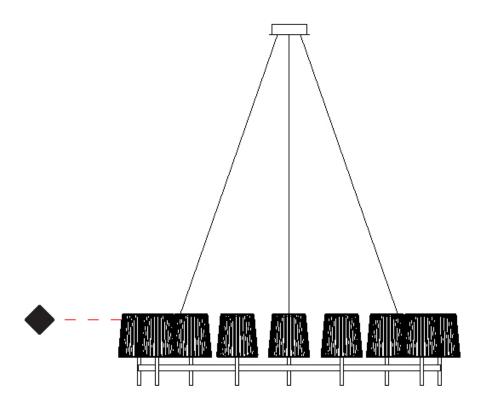



# **ZANEEN**®

# **JULIA OVAL SUSPENSION**

#### D101755-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia              |  |
|----------------------------|--|
| Subseries: Julia Oval      |  |
| Brand: Quasar              |  |
| Division: Design           |  |
| Mounting Type: Suspension  |  |
| Mounting Location: Ceiling |  |
| Subcategory: Ambient       |  |

| Mounting Location: Ceiling                      |
|---|
| Subcategory: Ambient                            |
| PHYSICAL  |
| Shape: Oval                                     |
| Length (mm): 1000                               |
| Length (in): 39 3/8                             |
| Width (mm): 600                                 |
| Width (in): 23 ½                                |
| Height (mm): 350                                |
| Height (in): 13 <sup>3</sup> / <sub>4</sub>     |
| Max. Overall Height (mm): 2350                  |
| Max. Overall Height (in): 92 $\frac{1}{2}$      |
| Light Distribution: Omnidirectional             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
|   |


#### ELECTRICAL

| ELECTRICAL                       |
|----------------------------------|
| Number of Lamps: 4               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 16     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |


#### LED

#### OPTICAL

# RATINGS AND CERTIFICATIONS












# **JULIA OVAL SUSPENSION**

D101755-

| PROJECT   |  |
|-----------|--|
| ТҮРЕ      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

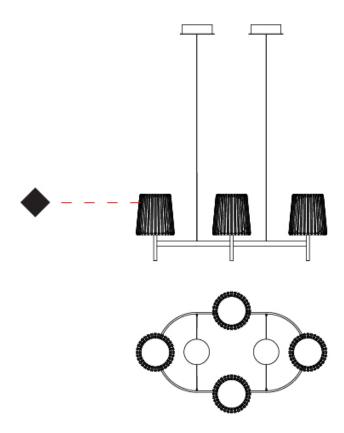





#### D101757-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL


| Series: Julia               |  |
|-----------------------------|--|
| Subseries: Julia Chandelier |  |
| Brand: Quasar               |  |
| Division: Design            |  |
| Mounting Type: Suspension   |  |
| Mounting Location: Ceiling  |  |
|                             |  |

| ELECTRICAL                       |
|----------------------------------|
| Number of Lamps: 6               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: B10                  |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 24     |
| Max. Wattage Per Lamp (W): 4     |
| Lamp Base: E12                   |
| Input Voltage (V): 120           |
| Lamp Voltage (V): 120            |
|                                  |


#### LED

#### OPTICAL

# **RATINGS AND CERTIFICATIONS**













D101757-

| TYPE SPECIFIER QUANTITY DATE | PROJECT   |  |  |
|------------------------------|-----------|--|--|
| QUANTITY                     | TYPE      |  |  |
|                              | SPECIFIER |  |  |
| DATE                         | QUANTITY  |  |  |
|                              | DATE      |  |  |

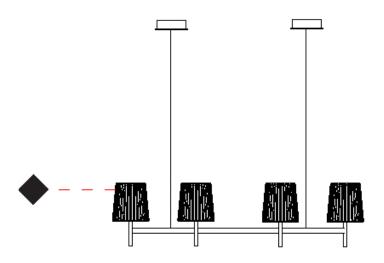







#### D101759-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

| Series: Julia               |  |
|-----------------------------|--|
| Subseries: Julia Chandelier |  |
| Brand: Quasar               |  |
| Division: Design            |  |
| Mounting Type: Suspension   |  |
| Mounting Location: Ceiling  |  |
|                             |  |

| Mounting Location: Ceiling                      |
|---|
| Subcategory: Ambient                            |
| PHYSICAL  |
| Shape: Round                                    |
| Diameter (mm): 1600                             |
| Diameter (in): 63                               |
| Height (mm): 1850                               |
| Height (in): 72 <sup>13</sup> / <sub>16</sub>   |
| Max. Overall Height (mm): 4850                  |
| Max. Overall Height (in): 190 $^{15}\!\!/_{16}$ |
| Light Distribution: Omnidirectional             |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA                       |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
| FLECTRICAL                                      |

| Cubic Details. 2000iiiii Cubic   |  |
|----------------------------------|--|
| ELECTRICAL                       |  |
| Number of Lamps: 15              |  |
| Lamp Type: LED Retrofit          |  |
| Lamp Shape: B10                  |  |
| Bulb Included: Bulb Not Included |  |
| Total Output Wattage (W): 60     |  |
| Max. Wattage Per Lamp (W): 4     |  |
| Lamp Base: E12                   |  |
| Input Voltage (V): 120           |  |
| Lamp Voltage (V): 120            |  |
|                                  |  |

#### LED

## OPTICAL


# **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE



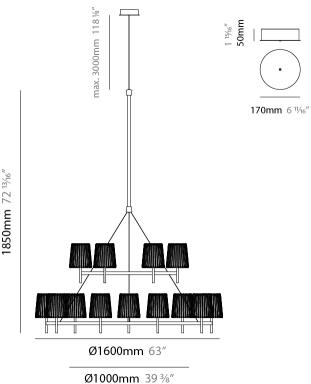






D101759-

| PROJECT  |   |
|----------|---|
| YPE      | _ |
| PECIFIER | _ |
| QUANTITY | _ |
| DATE     | _ |

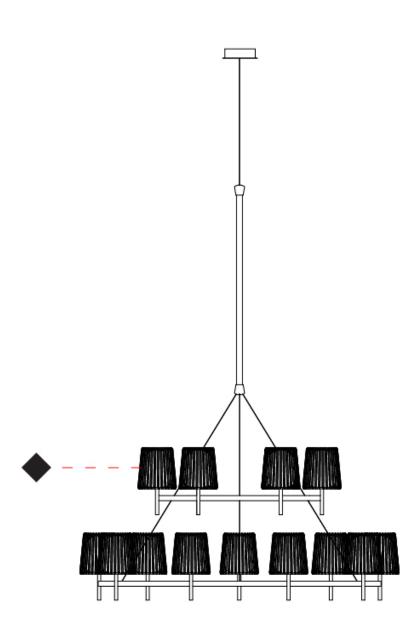





# **JULIA**

#### COLOR FINISH CHART

| PROJECT   |  |
|-----------|--|
| ТҮРЕ      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

#### **Fixture Finish**





**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.





# **JULIA**

|  | PROJECT   |
|--|-----------|
|  | ТҮРЕ      |
|  | SPECIFIER |
|  | QUANTITY  |
|  | DATE      |
|  | QUANTITY  |

# **LEGEND**

|             | floor-mounted  | ¥                       | pivotable  | *            | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|-------------|--|-------------------------|--|--------------|--|
| 崇           | wall and ceiling: recessed and surface mounted   | ·<br>ن                  | rotating   | 6            | warm dim / natural dimming LED   |
| <b></b>     | ceiling-mounted and wall-mounted   | <u> </u>                | illuminate tilted  | 0            | rechargeable battery powered   |
|             | wall-mounted   | Ī                       | color of suspension cable                                    |              | fixture with natural vivid LED (upon request)  |
| 8           | omni-directional light distribution  | 1                       | length of suspension cable                                   | CRI          | color rendering index  |
|             | direct light distribution  | $\dot{\wedge}$          | reflector degree selection                                   | (°K)         | color temperature  |
|             | direct/indirect light distribution   | s i                     | 3  | (M)          | lumen (luminous flux)  |
|             | TOWNS INCLUDE MANAGEMENT STOCKES OF COMMENTS STOCKES S | S<br>₹                  | super spot   | $\sim$       | ACTIONS - CONTROL MATERIAL ACTIVITIES AND CONTROL OF   |
|             | indirect light distribution  | $\overline{\mathbb{A}}$ | lens   | ₩)           | efficacy (lumens per watt)   |
|             | asymmetric light distribution  | $\otimes$               | lens pack  | UGR          | Unified Glare Rating (UGR) range from 5-40   |
|             | aura light distribution  | 0                       | shine ring   | *            | marine grade (AISI 316 stainless steel)  |
| R           | round wall or ceiling cut-out  | 0                       | integrated shine ring with diffuser                          | 30           | walk on  |
| $\Box$      | square wall or ceiling cut-out   | Ġ                       | free individual colors 01-29                                 | <b>②</b>     | drive on   |
| 4           | the supplied jig specifies the cutout dimensions   | Ĉ                       | individual colors: 00 (free of charge), 01-25 (extra charge) | 6sc          | Dark Sky Compliance  |
| <b>d</b> ≯  | minimum distance (meters) lamp - object  | <b>♦</b>                | luminaire part to be colored (F1)                            | Ġ            | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| $\hat{\pm}$ | recessed depth   |                         | luminaire part to be colored (F2)                            |              | lamp protected against explosion   |
| <u></u>     | ceiling thickness in mm  | •                       | luminaire part to be colored (F3)                            |              | blown glass using traditional methods by master glass blower                                   |
| 1           | ceiling thickness selection  |                         | luminaire part to be colored (F4)                            | 10)          | acoustic material  |
|             | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)  | •                       | luminaire part to be colored (F5)                            |              | protection class I, protection insulation  |
| 4           | included or excluded LED driver/transformer/<br>control gear   | •                       | color of 3-circuit adaptor                                   |              | protection class II, protection insulation   |
| ४           | separately switchable  | $\odot$                 | indirect diffuser  |              | ETL Certified to UL and CSA Standards  |
| <b>9</b>    | sensor   | O                       | direct diffuser  | շՄՆա         | UL Certified to UL and CSA Standards   |
|             | remote control   | 0                       | ball-proof (upon request)                                    | <b>(II</b> ) | CSA Certified to UL and CSA Standards  |
| 9           | available upon request   | 0                       | accessory  | <b>Z</b>     | Certified for North American Standards   |

### **IP RATING**

| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger)  |
|------|---|
| IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)      |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture                               |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions                        |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions              |
| IP65 | protected against ingress of dust protected against jets of water   |
| IP66 | protected against ingress of dust<br>protected against powerful jets of water or heavy seas   |
| IP67 | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                    |
| IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods  |

### **IK RATING**

above the surface)

| IK02        | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|-------------|---|
| <b>ІКОЗ</b> | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04        | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
| IK05        | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
| IK06        | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
| IK07        | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$  |
| IKOB        | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
| IK09        | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm