LUZ OCULTA METAL PORTABLE

D54021-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Metal |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Floor |
| Subcategory: Floor |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 380 |
| Diameter (in): 14 ¹⁵ / ₁₆ |
| Height (mm): 1600 |
| Height (in): 63 |
| Light Distribution: Direct / Indirect |
| Fixture Finish: BRA / BRZ / ABR |
| Fixture Material: Metal |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |

| Number of Lamps: 1 |
|----------------------------------|
| Lamp Type: LED Retrofit |
| Lamp Shape: A19 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 7 |
| Lamp Base: E26 |
| Input Voltage (V): 120 |
| Upon Request: 277Vac / GU24 |

LED OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards IP rating: IP20



| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



380mm 1415/16"

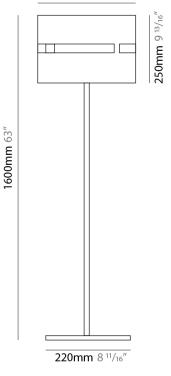


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54021-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

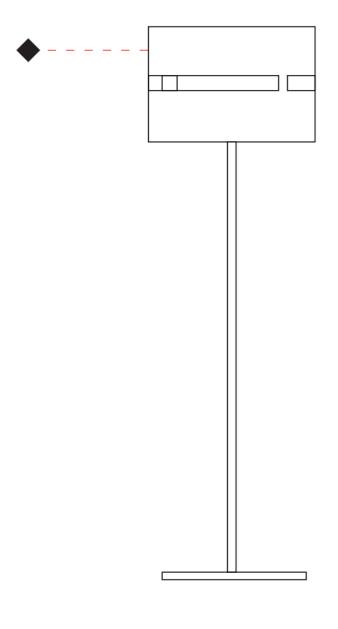

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54022-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta | |
|--|--|
| Subseries: Luz Oculta Metal | |
| Brand: Fambuena | |
| Division: Design | |
| Mounting Type: Portable | |
| Mounting Location: Floor | |
| Subcategory: Floor | |
| PHYSICAL | |
| Shape: Cylinder | |
| Diameter (mm): 220 | |
| Diameter (in): 8 ¹¹ / ₁₆ | |
| Height (mm): 1500 | |
| Height (in): 59 1/16 | |
| Light Distribution: Direct / Indirect | |
| Fixture Finish: BRA / BRZ / ABR | |
| Fixture Material: Metal | |
| Upon Request: Bolt Down | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: LED Retrofit | |

| Lamp Type: LED Retrofit |
|----------------------------------|
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | |
|-----------|--|
| ТҮРЕ | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |



220 mm 8 11/16"



170 mm 6 ¹¹/₁₆"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 3/28

LUZ OCULTA METAL PORTABLE

D54022-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

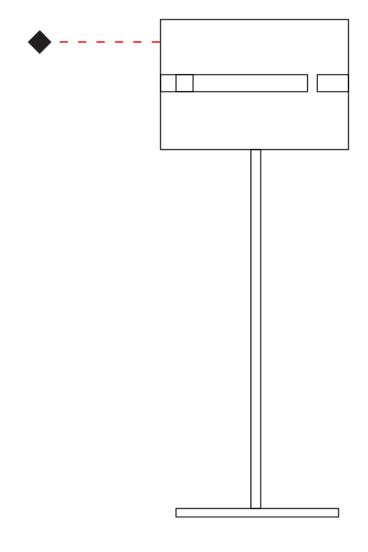

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54023-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---------------------------------------|
| Subseries: Luz Oculta Metal |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Floor |
| Subcategory: Floor |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 130 |
| Diameter (in): 5 1/ ₈ |
| Height (mm): 1450 |
| Height (in): 57 $\frac{1}{16}$ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: BRA / BRZ / ABR |
| Fixture Material: Metal |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |

| Lamp Type: LED Retrofit |
|----------------------------------|
| Lamp Shape: T4 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 5 |
| Lamp Base: G9 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



130mm 5 1/8"




220mm 8 11/16"

LUZ OCULTA METAL PORTABLE

D54023-

PROJECT

| PRUJECI | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

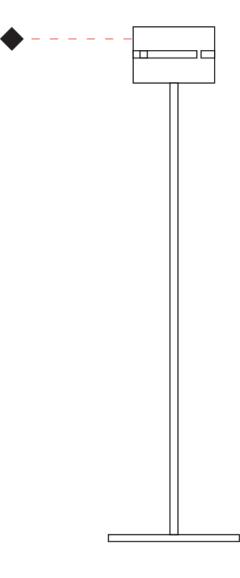

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 6/28

LUZ OCULTA METAL PORTABLE

D54024-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta | |
|--|--|
| Subseries: Luz Oculta Metal | |
| Brand: Fambuena | |
| Division: Design | |
| Mounting Type: Portable | |
| Mounting Location: Floor | |
| Subcategory: Floor | |
| PHYSICAL | |
| Shape: Cylinder | |
| Diameter (mm): 100 | |
| Diameter (in): $3\frac{15}{16}$ | |
| Height (mm): 1500 | |
| Height (in): 59 ¹ / ₁₆ | |
| Light Distribution: Direct / Indirect | |
| Fixture Finish: BRA / BRZ / ABR | |
| Fixture Material: Metal | |
| Upon Request: Bolt Down | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: LED Retrofit | |

Lamp Type: LED Retrofit

| Lamp Shape: T4 | |
|----------------------------------|--|
| Bulb Included: Bulb Not Included | |
| Max. Wattage Per Lamp (W): 5 | |
| Lamp Base: G9 | |
| Input Voltage (V): 120 | |
| | |

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20



| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |



3 15/16" 100mm



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 7/28

LUZ OCULTA METAL PORTABLE

D54024-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

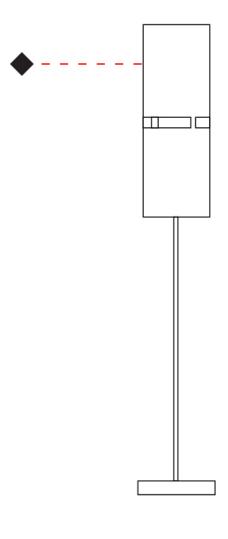

LUZ OCULTA METAL PORTABLE

D54025-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta | |
|---|--|
| Subseries: Luz Oculta Metal | |
| Brand: Fambuena | |
| Division: Design | |
| Mounting Type: Portable | |
| Mounting Location: Table | |
| Subcategory: Table | |
| PHYSICAL | |
| Shape: Cylinder | |
| Diameter (mm): 220 | |
| Diameter (in): $8^{11}/_{16}$ | |
| Height (mm): 600 | |
| Height (in): 23 ⁵ / ₈ | |
| Light Distribution: Direct / Indirect | |
| Fixture Finish: BRA / BRZ / ABR | |
| Fixture Material: Metal | |
| Upon Request: Bolt Down | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: LED Retrofit | |

| Lamp Shape: B10 |
|----------------------------------|
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards IP rating: IP20



| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



220 mm 8 11/16"




Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54025-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

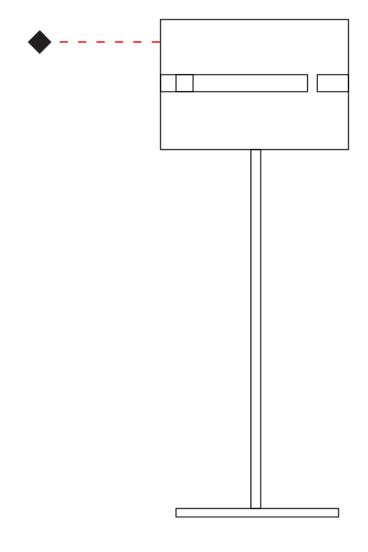

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA METAL PORTABLE

D54026-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Metal |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Table |
| Subcategory: Table |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 120 |
| Diameter (in): 4 ³ / ₄ |
| Height (mm): 500 |
| Height (in): 19 ¹¹ / ₁₆ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: BRA / BRZ / ABR |
| Fixture Material: Metal |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |

| Lamp Shape: T4 |
|----------------------------------|
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 5 |
| Lamp Base: G9 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards IP rating: IP20



| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



130mm 5 1/8"

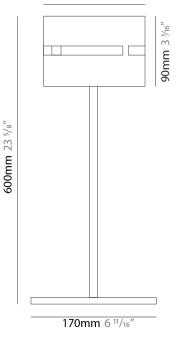


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54026-

| PROJECT |
|-----------|
| ТҮРЕ |
| SPECIFIER |
| QUANTITY |
| DATE |
| |

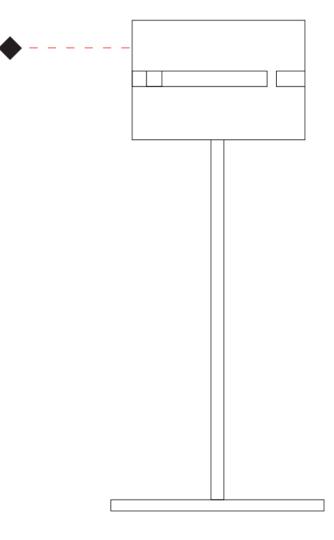

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA METAL PORTABLE

D54027-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Metal |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Table |
| Subcategory: Table |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 100 |
| Diameter (in): $3^{15}/_{16}$ |
| Height (mm): 600 |
| Height (in): 23 ⁵ / ₈ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: BRA / BRZ / ABR |
| Fixture Material: Metal |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |

| Lamp Shape: T4 |
|----------------------------------|
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 5 |
| Lamp Base: G9 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards IP rating: IP20



| PROJECT | |
|-----------|--|
| ТҮРЕ | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |



100mm 3 15/16"

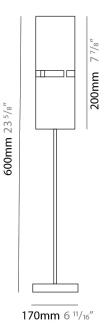


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA METAL PORTABLE

D54027-

PROJECT

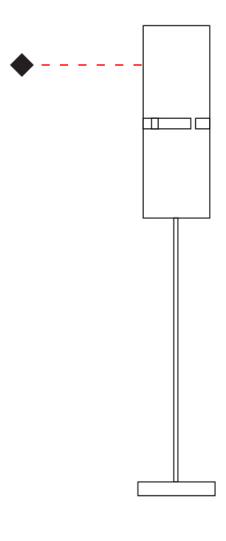

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA WOOD PORTABLE

D54030-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Wood |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Floor |
| Subcategory: Floor |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 360 |
| Diameter (in): 14 $\frac{3}{16}$ |
| Height (mm): 1650 |
| Height (in): 64 ¹⁵ / ₁₆ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: DOW / NAT |
| Holder Finish: BRA / BRZ |
| Fixture Material: Metal / Wood |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |
| Lamp Shape: A19 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 7 |
| Lamp Base: E26 |
| Input Voltage (V): 120 |

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Upon Request: 277Vac / GU24

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | |
|-----------|--|
| ТҮРЕ | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |



Ø360mm 14 3/16"

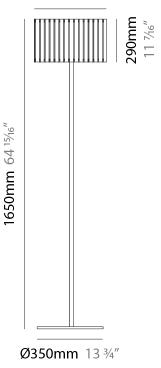

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA WOOD PORTABLE

D54030-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

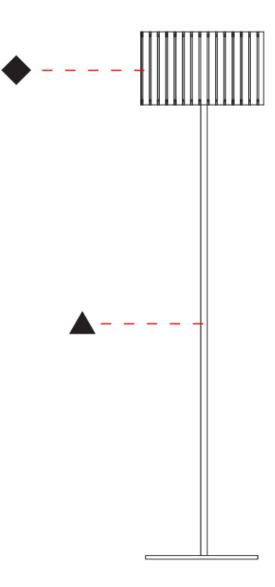

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA WOOD PORTABLE

D54032-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta | |
|---------------------------------------|--|
| Subseries: Luz Oculta Wood | |
| Brand: Fambuena | |
| Division: Design | |
| Mounting Type: Portable | |
| Mounting Location: Floor | |
| Subcategory: Floor | |
| PHYSICAL | |
| Shape: Cylinder | |
| Diameter (mm): 260 | |
| Diameter (in): 10 $\frac{1}{4}$ | |
| Height (mm): 1550 | |
| Height (in): 61 | |
| Light Distribution: Direct / Indirect | |
| Fixture Finish: DOW / NAT | |
| Holder Finish: BRA / BRZ | |
| Fixture Material: Metal / Wood | |
| Upon Request: Bolt Down | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: LED Retrofit | |
| Lamp Shape: B10 | |

| LED | |
|----------|---------------------------|
| Input Vo | oltage (V): 120 |
| Lamp B | ase: E12 |
| Max. Wa | attage Per Lamp (W): 4 |
| Bulb Inc | cluded: Bulb Not Included |
| Lamp Sl | hape: B10 |
| Lamp 1 | ype. LED Retroit |

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



10 1⁄4″ Ø260mm

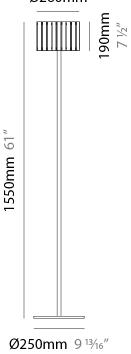


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA WOOD PORTABLE

D54032-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

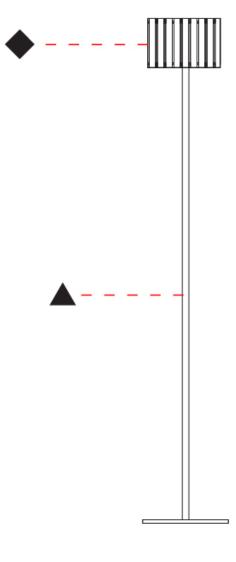

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA WOOD PORTABLE

D54034-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|--|
| Subseries: Luz Oculta Wood |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Floor |
| Subcategory: Floor |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 150 |
| Diameter (in): 5 $\frac{7}{8}$ |
| Height (mm): 1500 |
| Height (in): 59 ¹ / ₁₆ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: DOW / NAT |
| Holder Finish: BRA / BRZ |
| Fixture Material: Metal / Wood |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |
| Lamp Shape: T4 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 3 |

| Max. wattage Per Lamp (w): |
|----------------------------|
| Lamp Base: G9 |
| Input Voltage (V): 120 |

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



5 1/8" Ø150mm



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

LUZ OCULTA WOOD PORTABLE

D54034-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

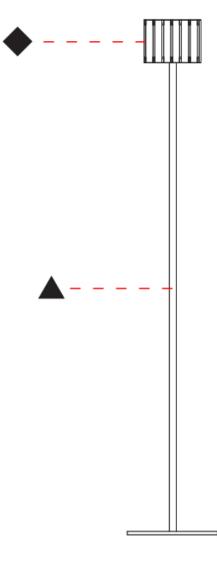

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA WOOD PORTABLE

D54036-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Wood |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Table |
| Subcategory: Table |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 360 |
| Diameter (in): 14 $\frac{3}{16}$ |
| Height (mm): 600 |
| Height (in): 23 ⁵ ⁄ ₈ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: DOW / NAT |
| Holder Finish: BRA / BRZ |
| Fixture Material: Metal / Wood |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |
| Lamp Shape: A19 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 7 |
| Lamp Base: E26 |

Upon Request: 277Vac / GU24 LED

OPTICAL


RATINGS AND CERTIFICATIONS

Input Voltage (V): 120

Certified By: CSA Certified to UL and CSA Standards IP rating: IP20

| ТҮРЕ |
|-----------|
| |
| SPECIFIER |
| QUANTITY |
| DATE |



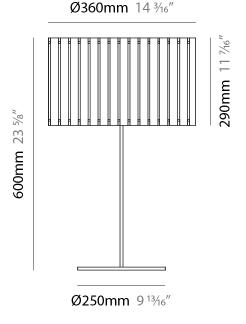

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 21/28

LUZ OCULTA WOOD PORTABLE

D54036-

| PROJECT |
|-----------|
| ТҮРЕ |
| SPECIFIER |
| QUANTITY |
| DATE |
| |

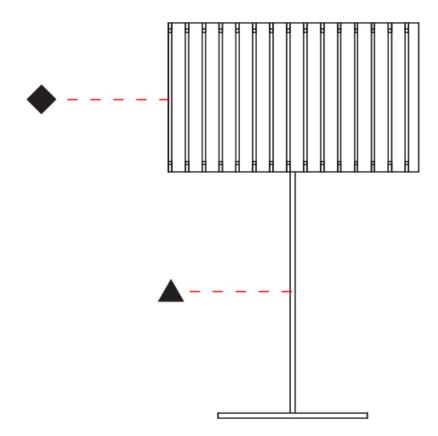

LUZ OCULTA WOOD PORTABLE

D54038-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta | |
|---|--|
| Subseries: Luz Oculta Wood | |
| Brand: Fambuena | |
| Division: Design | |
| Mounting Type: Portable | |
| Mounting Location: Table | |
| Subcategory: Table | |
| PHYSICAL | |
| Shape: Cylinder | |
| Diameter (mm): 260 | |
| Diameter (in): 10 ¹ / ₄ | |
| Height (mm): 550 | |
| Height (in): 21 ⁵ / ₈ | |
| Light Distribution: Direct / Indirect | |
| Fixture Finish: DOW / NAT | |
| Holder Finish: BRA / BRZ | |
| Fixture Material: Metal / Wood | |
| Upon Request: Bolt Down | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: LED Retrofit | |
| Lamp Shape: B10 | |
| Bulb Included: Bulb Not Included | |
| Max. Wattage Per Lamp (W): 4 | |
| Lamp Base: E12 | |

| Eamp | Dusc. L | 12 | |
|-------|---------|------|-----|
| Input | Voltage | (V): | 120 |

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |





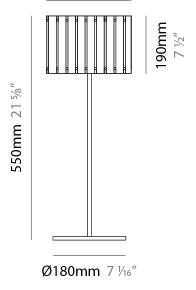

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

Page 23/28

LUZ OCULTA WOOD PORTABLE

D54038-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

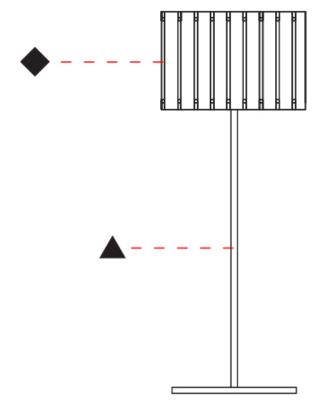

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

LUZ OCULTA WOOD PORTABLE

D54040-

| base number | Finish | Finish |
|-------------|---------|---------|
| | Options | Options |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Luz Oculta |
|---|
| Subseries: Luz Oculta Wood |
| Brand: Fambuena |
| Division: Design |
| Mounting Type: Portable |
| Mounting Location: Table |
| Subcategory: Table |
| PHYSICAL |
| Shape: Cylinder |
| Diameter (mm): 150 |
| Diameter (in): $5\frac{7}{8}$ |
| Height (mm): 500 |
| Height (in): 19 ¹¹ / ₁₆ |
| Light Distribution: Direct / Indirect |
| Fixture Finish: DOW / NAT |
| Holder Finish: BRA / BRZ |
| Fixture Material: Metal / Wood |
| Upon Request: Bolt Down |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |
| Lamp Shape: T4 |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 3 |

| Max. Wattage Per Lan |
|------------------------|
| Lamp Base: G9 |
| Input Voltage (V): 120 |
| |

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT |
|-----------|
| ТҮРЕ |
| SPECIFIER |
| QUANTITY |
| DATE |
| |



Ø150mm 5 %"

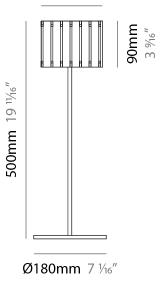

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 25/28

LUZ OCULTA WOOD PORTABLE

D54040-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

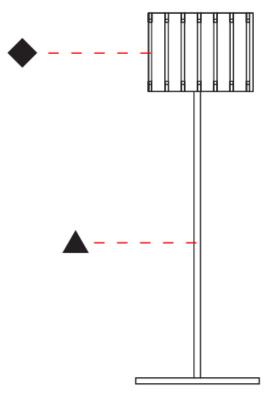




LUZ OCULTA COLOR FINISH CHART

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

Fixture Finish











Holder Finish



Bronze - BRZ

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

May 18, 2024, 2:24 am

Page 27/28





LUZ OCULTA

PROJECT

TYPE

SPECIFIER

QUANTITY DATE

LEGEND

| | | | | | anacial LED (upon request) BCD, BCDW(tupphla |
|-----------------------|--|-----------------------|--|---------------|--|
| ⊥ | floor-mounted | ¥ | pivotable | \circledast | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
| フ | wall and ceiling: recessed and surface mounted | S | rotating | 0 | warm dim / natural dimming LED |
| Î | ceiling-mounted and wall-mounted | Œ | illuminate tilted | Ø | rechargeable battery powered |
| \rightarrow | wall-mounted | T | color of suspension cable | 1 | fixture with natural vivid LED (upon request) |
| Y | omni-directional light distribution | ÷ | length of suspension cable | CRI | color rendering index |
| À | direct light distribution | Δ | reflector degree selection | ĸ | color temperature |
| X | direct/indirect light distribution | s s | super spot | (J | lumen (luminous flux) |
| $\mathbf{\mathbf{x}}$ | indirect light distribution | * | lens | (¥) | efficacy (lumens per watt) |
| | asymmetric light distribution | Ð | lens pack | UGR | Unified Glare Rating (UGR) range from 5-40 |
| Ă | aura light distribution | 0 | shine ring | €¢, | marine grade (AISI 316 stainless steel) |
| R | round wall or ceiling cut-out | \odot | integrated shine ring with diffuser | 6 | walk on |
| 5 | square wall or ceiling cut-out | Ū. | free individual colors 01-29 | ۲ | drive on |
| ۲ ۲ | the supplied jig specifies the cutout dimensions | ů). | individual colors: 00 (free of charge), 01-25 (extra charge) | BSC | Dark Sky Compliance |
| [+,+] | minimum distance (meters) lamp - object | ٠ | luminaire part to be colored (F1) | Ġ | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| Ŧ | recessed depth | | luminaire part to be colored (F2) | 3 | lamp protected against explosion |
| | ceiling thickness in mm | | luminaire part to be colored (F3) | | blown glass using traditional methods by master glass blower |
| | ceiling thickness selection | | luminaire part to be colored (F4) | (ه) | acoustic material |
| | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) | ۲ | luminaire part to be colored (F5) | | protection class I, protection insulation |
| 6 | included or excluded LED driver/transformer/ control gear | | color of 3-circuit adaptor | | protection class II, protection insulation |
| У | separately switchable | \odot | indirect diffuser | | ETL Certified to UL and CSA Standards |
| シリ | sensor | D | direct diffuser | c (H) us | UL Certified to UL and CSA Standards |
| | remote control | $\boldsymbol{\Theta}$ | ball-proof (upon request) | <u>ج</u> | CSA Certified to UL and CSA Standards |
| 2 | available upon request | U | accessory | 2 | Certified for North American Standards |

IP RATING

| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
|------|--|
| IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
| IP65 | protected against ingress of dust protected against jets of water |
| IP66 | protected against ingress of dust protected against powerful jets of water or heavy seas |
| IP67 | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
| IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| КО1 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|------|---|
| IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
| КОЗ | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
| КО5 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
| КОб | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
| IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
| КОВ | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
| 1609 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
| IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |