

D54021-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta
Subseries: Luz Oculta Metal
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

PHYSICAL

Shape: Cylinder
Diameter (mm): 380
Diameter (in): 14 15/16
Height (mm): 1600
Height (in): 63
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down

Fixture F	inish: BRA / BRZ / ABR	
Fixture M	Material: Metal	
Upon Re	quest: Bolt Down	
ELECTRI	CAL	
Number	of Lamps: 1	
Lamp Ty	pe: LED Retrofit	
Lamp Sh	ape: A19	
Bulb Incl	uded: Bulb Not Included	
Max. Wat	ttage Per Lamp (W): 7	
Lamp Ba	se: E26	
Input Vol	ltage (V): 120	
Upon Re	quest: 277Vac / GU24	
150		


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

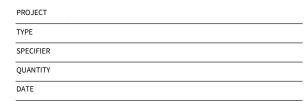



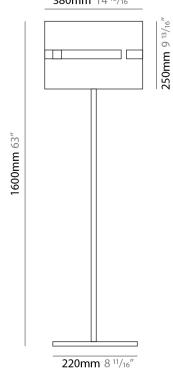






D54021-

PROJECT			
TYPE			_
SPECIFIER			_
QUANTITY			_
DATE			_

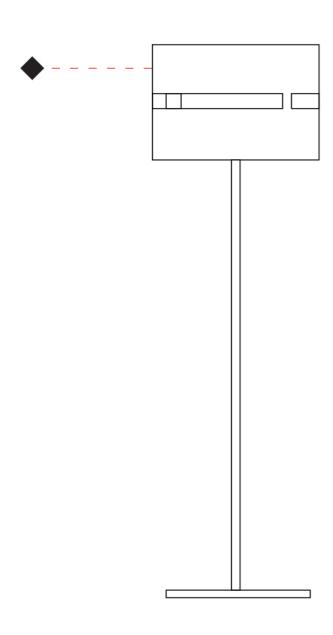





D54022-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta	
Subseries: Luz Oculta Metal	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

DHYSICAL

PHYSICAL
Shape: Cylinder
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 1500
Height (in): 59 ½
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	










D54022-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

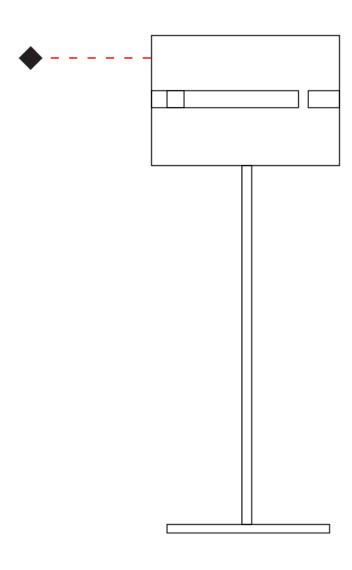





D54023-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta
Subseries: Luz Oculta Metal
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

DHVSICAL

PHYSICAL
Shape: Cylinder
Diameter (mm): 130
Diameter (in): 5 1/8
Height (mm): 1450
Height (in): 57 ½
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down

opon request. Bott bown	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 5	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified by: 0	Certified for North American Standards	
IP rating: IP20	0	

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		












D54023-

ROJECT	
YPE	_
PECIFIER	
UANTITY	_
ATE	_

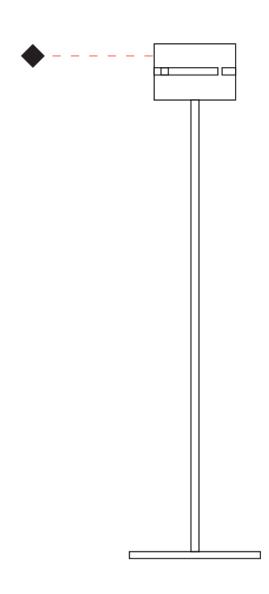





D54024-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta
Subseries: Luz Oculta Metal
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

Division, Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 15/16
Height (mm): 1500
Height (in): 59 ½
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL
Number of Lamps: 1

Upon Request: Bolt Down
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified by: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			










D54024-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

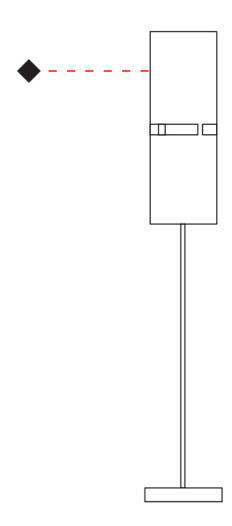





D54025-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

PHYSICAL

Shape: Cylinder
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 600
Height (in): 23 ⁵ / ₈
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












D54025-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

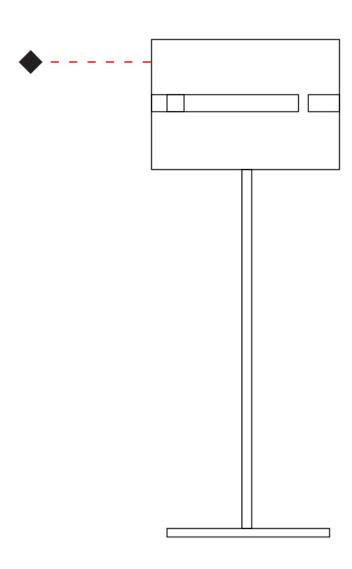





D54026-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta	
Subseries: Luz Oculta Metal	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 120
Diameter (in): 4 ³ / ₄
Height (mm): 500
Height (in): 19 11/16
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 5	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20





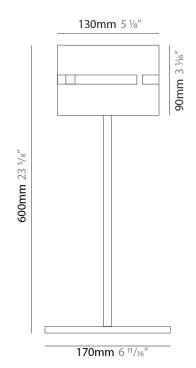






D54026-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

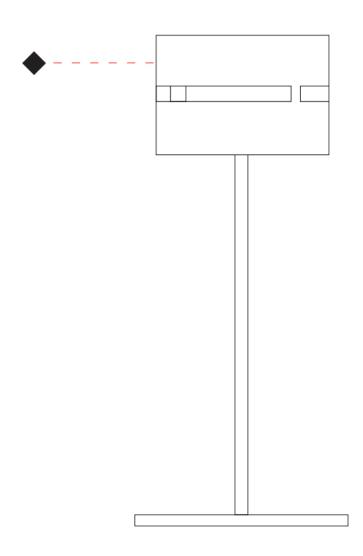





D54027-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta
Subseries: Luz Oculta Metal
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table

Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 ¹⁵ / ₁₆
Height (mm): 600
Height (in): 23 ½
Light Distribution: Direct / Indirect
Fixture Finish: BRA / BRZ / ABR
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 5	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT


TYPE

SPECIFIER

QUANTITY

DATE










D54027-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

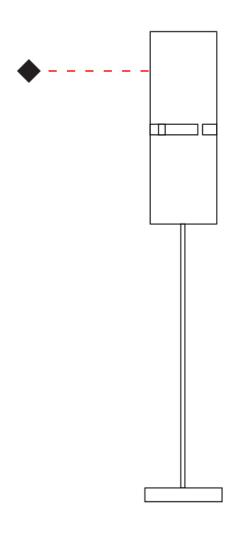





D54030-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design

Mounting Type: Portable

Mounting Location: Floor

Subcategory: Floor

PHYSICAL

Shape: Cylinder

Diameter (mm): 360

Diameter (in): 14 1/16

Height (mm): 1650

Height (in): 64 15/16

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 7

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



Ø360mm 14 3/16"




Ø350mm 13 ¾"





D54030-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

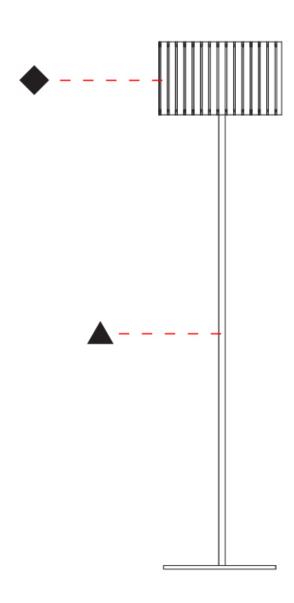





D54032-

base number

Finish Options

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series:	Luz (Jcul	ta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design

Mounting Type: Portable

Mounting Location: Floor

Subcategory: Floor

PHYSICAL

Shape: Cylinder

Diameter (mm): 260

Diameter (in): 10 1/4

Height (mm): 1550

Height (in): 61

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: B10

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 4

Lamp Base: E12

Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



10 1/4"

Ø260mm




Ø250mm 9 13/16"





D54032-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

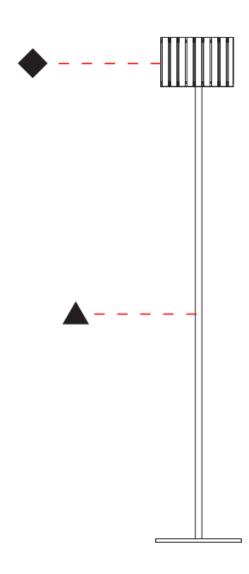





D54034-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design Mounting Type: Portable

Mounting Location: Floor

Subcategory: Floor

PHYSICAL

Shape: Cylinder

Diameter (mm): 150

Diameter (in): 5 1/8

Height (mm): 1500

Height (in): 59 1/16

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: T4

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 3

Lamp Base: G9

Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20





Ø150mm




Ø250mm 9 13/16"





D54034-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

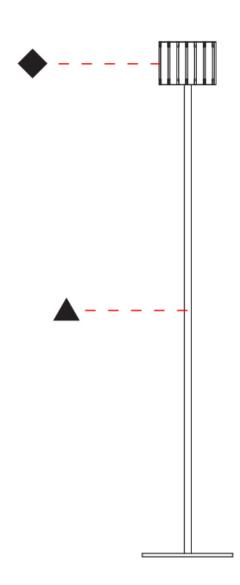





D54036-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design

Mounting Type: Portable

Mounting Location: Table

Subcategory: Table

PHYSICAL

Shape: Cylinder

Diameter (mm): 360

Diameter (in): $14\frac{3}{16}$

Height (mm): 600

Height (in): 23 1/8

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 7

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20












D54036-

PROJECT
ТУРЕ
SPECIFIER
QUANTITY
DATE

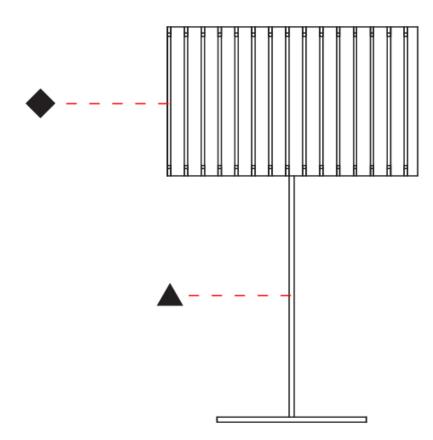





D54038-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design

Mounting Type: Portable

Mounting Location: Table

Subcategory: Table

PHYSICAL

Shape: Cylinder

Diameter (mm): 260

Diameter (in): 10 1/4

Height (mm): 550
Height (in): 21 \(^{5}\){

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: B10

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 4

Lamp Base: E12

Input Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












D54038-



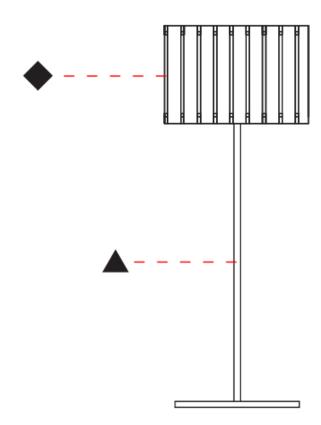





D54040-

base number

Finish

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Luz Oculta

Subseries: Luz Oculta Wood

Brand: Fambuena

Division: Design

Mounting Type: Portable

Mounting Location: Table

Subcategory: Table

PHYSICAL

Shape: Cylinder

Diameter (mm): 150

Diameter (in): 5 1/8

Height (mm): 500

Height (in): 19 11/16

Light Distribution: Direct / Indirect

Fixture Finish: DOW / NAT

Holder Finish: BRA / BRZ

Fixture Material: Metal / Wood

Upon Request: Bolt Down

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: T4

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 3

Lamp Base: G9

Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONSCertified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE















D54040-



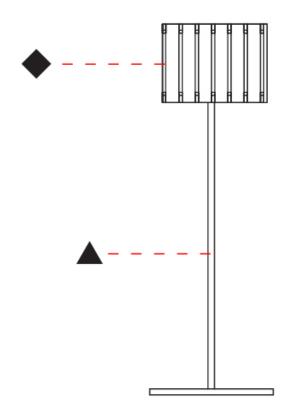





LUZ OCULTA

COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish











Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





LUZ OCULTA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

<u></u> 1	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	J	rotating	0	warm dim / natural dimming LED
<u> </u>	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
→ \	wall-mounted	I	color of suspension cable	71400	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	→	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(X)	lumen (luminous flux)
M	indirect light distribution	*	lens	(₹	efficacy (lumens per watt)
T a	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
3	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
□	square wall or ceiling cut-out	Ċ	free individual colors 01-29	②	drive on
c√c t	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u>+</u>	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
<u> </u>	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
i i	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
ک ہ	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
• <i>y</i>) s	sensor	0	direct diffuser	։ (Մ) us	UL Certified to UL and CSA Standards
(i)	remote control	0	ball-proof (upon request)	(B)	CSA Certified to UL and CSA Standards
7	available upon request	0	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

above the surface)

ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) $$

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm