

D111180					
base number	Finish	Finish	Finish		

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Abstract
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 250
Height (in): 9 13/16
Max. Overall Height (mm): 2250
Max. Overall Height (in): 88 $\frac{9}{16}$
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /
OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK
Accent Finish: WHI / GSD

Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 20
Lamp Base: E26
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS


Upon Request: 277Vac / GU24

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

IP rating: IP20

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	






Ø500mm 19 11/16"





D111180-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

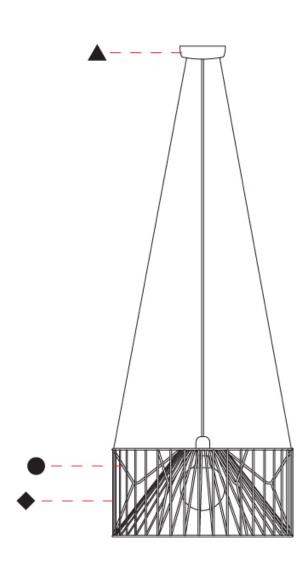





D	1	1	1	1	8	1	-

base number

inish ptions Finish Options Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

OLITZIOTE	
Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Culturate and Devident	

Modifying Location. Celling
Subcategory: Pendant
PHYSICAL
Shape: Abstract
Diameter (mm): 500
Diameter (in): 19 ¹¹ / ₁₆
Height (mm): 500
Height (in): 19 11/16
Max. Overall Height (mm): 2500
Max. Overall Height (in): 98 $\frac{7}{16}$
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK	
Accent Finish: WHI / GSD	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2,000mm/78 3/4" Transparent Cable	

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 20	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			










D111181-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

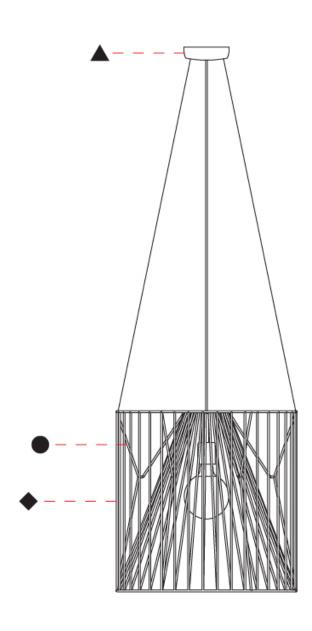





D111182	<u>2</u> -	-	_
base number	Finish	Finish	Finish
	Options	Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

·	
Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Abstract
Diameter (mm): 800
Diameter (in): 31 ½
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 2160
Max. Overall Height (in): 85 ½
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK

Holder Finish: MWH / MBK

Accent Finish: WHI / GSD

Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 20
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



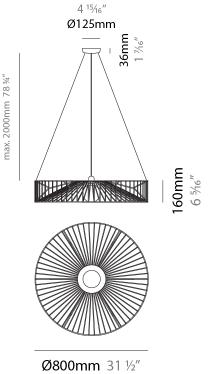






D111182-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

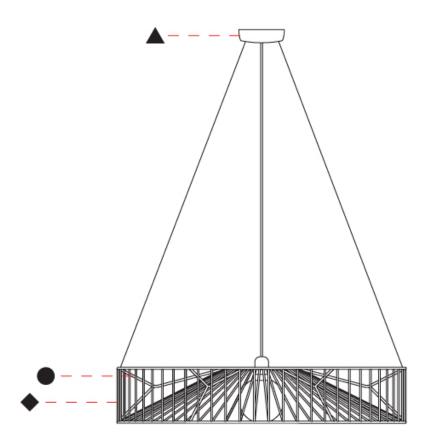





D112048-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 280	
Height (in): 11	
Light Distribution: Omnidirectional	
Fixture Finish: BEI / BLK / BLU / COG / [OGN / GRY / MRN / MOC / MUS /

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

OLV / SIL / STR / TER / WITI
Holder Finish: WHI / GSD
Accent Finish: WHI
Fixture Material: Fabric Cord / Metal

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Included	
Max. Wattage Per Lamp (W): 20	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED

OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





8 ½16" Ø220mm

11" 280mm



250mm 913/6"





Ø500mm 19 11/16"





D112048-

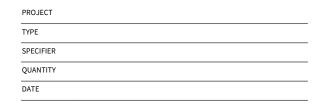

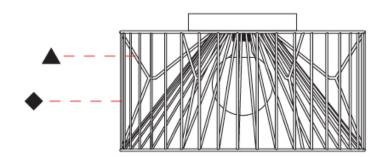





D112049-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient

PHYSICAL
Shape: Abstract
Diameter (mm): 800
Diameter (in): 31 ½
Height (mm): 190
Height (in): 7 ½

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 20

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20






8 ¹/₁₆" Ø220mm

7 ½" 190mm



|60mm |6546"




Ø800mm 31 ½"





D112049-

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE







D114030					
base number	Finish	Finish	Finish		
	Ontions	Ontions	Ontions		

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Mariola
Ī	Brand: Ole
į	Division: Design
Ī	Mounting Type: Portable
i	Mounting Location: Floor
	Subcategory: Ambient
٠	<u> </u>

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 1550	
Height (in): 61	

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Fixture Material: Fabric Cord / Metal
Cable Details: 100/100 Cord
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D114030-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

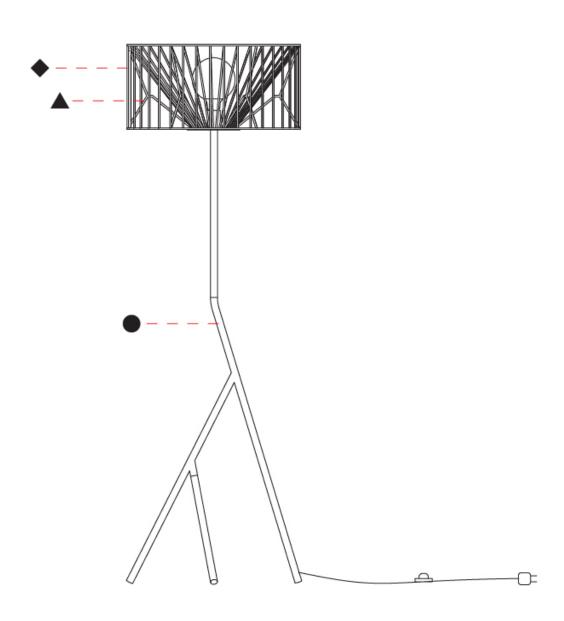





D114031-

base number

Finish	Finish
Options	Option

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

Subcategory, Ambient	
PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 540	Ξ
Height (in): 21 ¹ / ₄	
Light Distribution: Omnidirectional	
Diffuser: PMMA - Opal	
Fixture Finish: BEL / BLK / BLLL / COG / DGN / GRY / MRN / MOC / MLIS /	

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

OLV / SIL / STIN / TLK / WITH	
Holder Finish: WHI / GSD	
Accent Finish: WHI	
Fixture Material: Fabric Cord / Metal	
Cable Details: 220/100 Cord	

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			










D114031-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

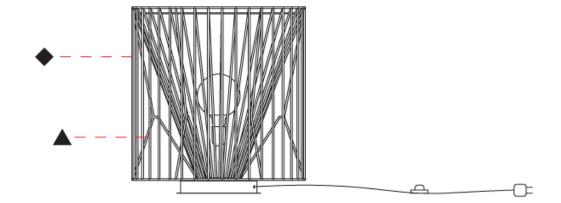





E111198-	
----------	--

base number

Finish Options Finish Options Finish

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL

Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	

Height (mm): 250

Height (in): 9 $\frac{1}{1}$ ₁₆ Max. Overall Height (mm): 2250

Max. Overall Height (in): 89 1/16

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLW / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Accent Finish: WHI / GSD

Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










E111198-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

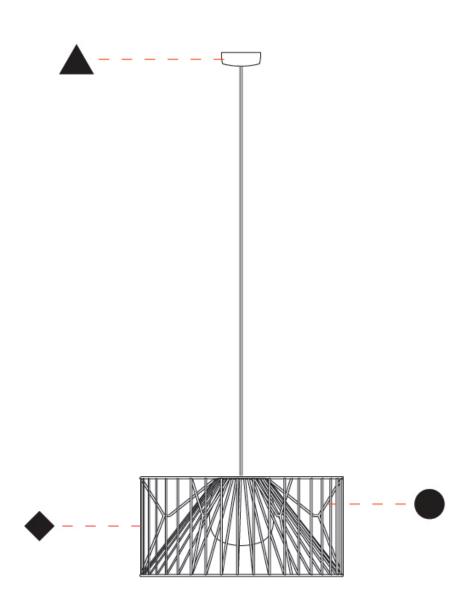





F	1	1	1	1	a	a.	_
E	1	1	1	_	. 3	יכ	-

baco numbo

Finish	Finish	Finish
Options	Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcategory: Ambient
PHYSICAL
Shape: Drum
Diameter (mm): 800
Diameter (in): 31 ½
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 2160
Max. Overall Height (in): 85 ½
Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK	
Accent Finish: WHI / GSD	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2,000mm/78 3/4" Transparent Cable	

Cable Details: 2,000mm/78 3/4" Transparent Cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



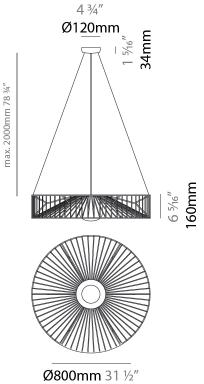






E111199-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

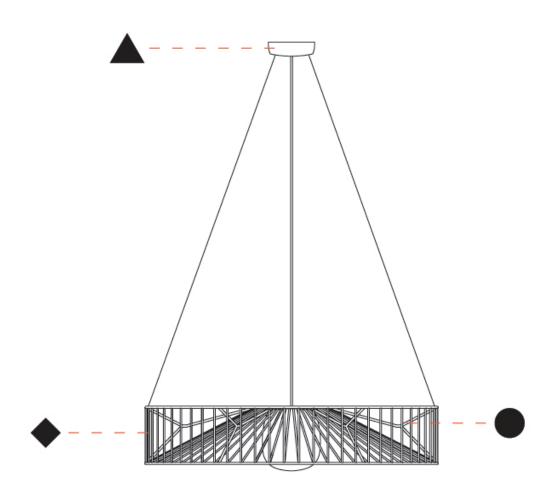





E112052-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Exterior
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient

PHYSICAL	
Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 490	
Height (in): 19 ⁵ / ₁₆	
Light Distribution: Omnidirectional	

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Bulb Included: Bulb Included Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP66








Ø500mm 19 11/16"





E112052-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

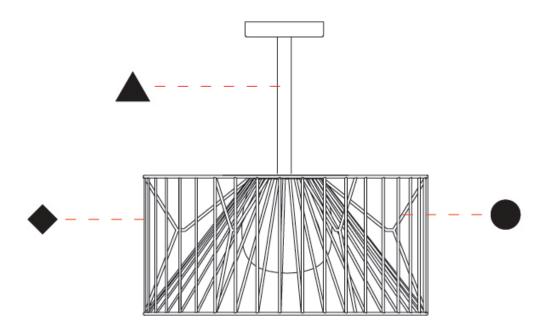





E114033-

base number

Finish Options

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL

Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	

Height (mm): 1650

Height (in): 64 ¹⁵/₁₆

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 100/100 Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

IP rating: IP66

Р	ROJECT
Т	/PE
S	PECIFIER
Q	UANTITY
D	ATE








Ø500mm 19 11/16"





E114033-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	_

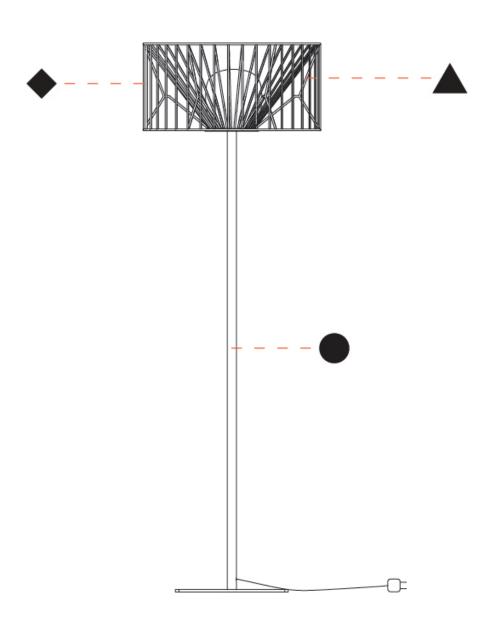





E114034-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL

Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 520	
Height (in): 20 ½	

Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North America

 $\underline{\hbox{Certified By: Certified for North American Standards}}$














E114034-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

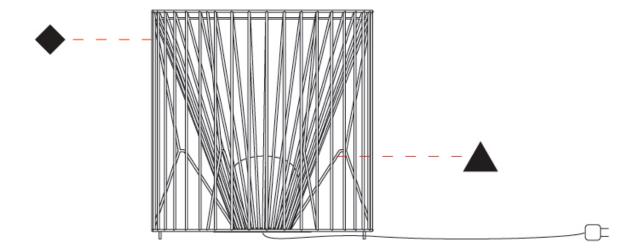






MARIOLA

COLOR FINISH CHART


PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_


Fixture Finish































Holder Finish













MARIOLA SUSPENSION, SURFACE, PORTABLE

COLOR FINISH CHART

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Accent	Finish

White - WH	I		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT
TYPE
NOTES
QUANTITY
DATE





















OLIVE - OLV Pant. 5625C	323
6	Sept.
X	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	





PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











MARIOLA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

Т		_			special LED (upon request) RGR_RGRW_tunable
	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩ <u></u>	efficacy (lumens per watt)
	asymmetric light distribution	\otimes	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
7	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□+, +	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
₹	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	։ (Մ) ու	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm