

A3ID75-TRI-SYS COMPONENTS TRIMLESS

A3701600

DESCRIPTION

Idaho 75 System - Trimless Profile per Meter - Max 3000mm / 118 1/8"

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling


PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 82
Width (in): 3 1/4
Height (mm): 90
Height (in): 3 9/16
Weight (kg): 1.87
Weight (lbs): 4.12
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

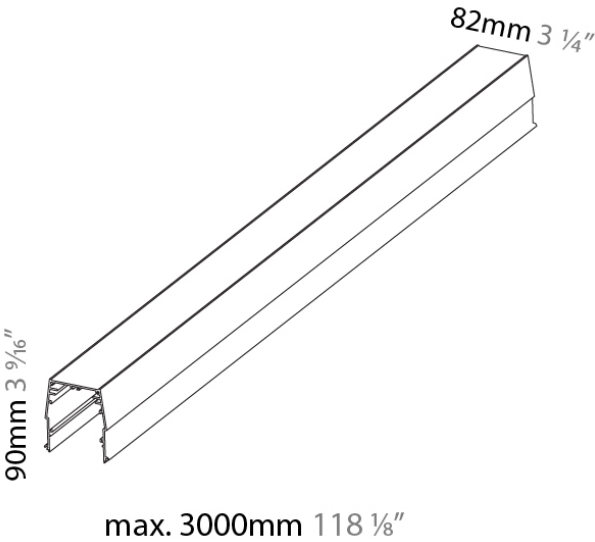

A3ID75-TRI-SYS COMPONENTS

A38155-

DESCRIPTION

Idaho 75 System - Idaline Light Insert - 1140mm / 44 7/8" - 19.6W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
Length (mm): 1140
Length (in): 44 7/8
Width (mm): 60
Width (in): 2 3/8
Height (mm): 50
Height (in): 1 15/16
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 3.97
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 19.6
Total Output Wattage (W): 16 / 12.8 (3500K)
Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350 / 400 (3500K)

LED

Delivered Lumen Range: 1000 - 2999 lm
Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 1723 / 1753 / 1789
Nominal Lumen (lm): 2587 / 2633 / 2687
CRI: >90 CRI
Efficiency (%): 0.59
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time


OPTICAL

Beam Angle: 64

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

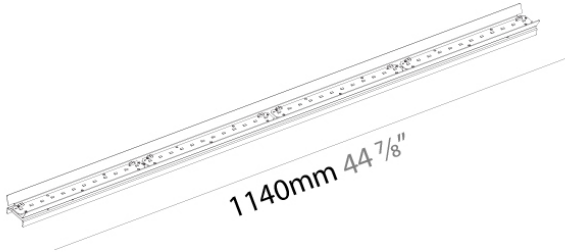

A3ID75-TRI-SYS COMPONENTS

A38157-

DESCRIPTION

Idaho 75 System - Idaline Light Insert - 1420mm / 55 7/8" - 24.5W LED (Zhaga Standard) - 3000K / 3500K / 4000K - CRI:90

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
Length (mm): 1420
Length (in): 55 7/8
Width (mm): 60
Width (in): 2 3/8
Height (mm): 50
Height (in): 1 15/16
Light Distribution: Direct
Weight (kg): 2.139
Weight (lbs): 4.71
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 24.5
Total Output Wattage (W): 20 / 16 (3500K)
Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350 / 500 (3500K)

LED

Delivered Lumen Range: 2000 - 2999 lm
Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 2153 / 2192 / 2237
Nominal Lumen (lm): 3233 / 3291 / 3358
CRI: >90 CRI
Efficiency (%): 0.59
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time


OPTICAL

Beam Angle: 106

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

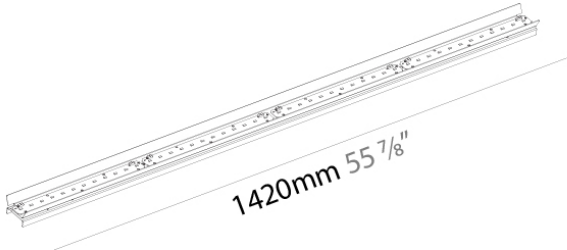

A3ID75-TRI-SYS COMPONENTS

A38159-

DESCRIPTION

Idaho 75 System - Idaline Light Insert - 1700mm - 29.4W LED (Zhaga Standard) - 3000K / 3500K / 4000K - CRI:90

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
Length (mm): 1700
Length (in): 66 15/16
Width (mm): 60
Width (in): 2 3/8
Height (mm): 50
Height (in): 1 15/16
Light Distribution: Direct
Weight (kg): 2.469
Weight (lbs): 5.44
Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 30
Total Output Wattage (W): 24 / 19.2 (3500K)
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (mA): 350 / 600 (3500K)


LED

Delivered Lumen Range: 2000 - 2999 lm
Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 2084 / 2121 / 2164
Nominal Lumen (lm): 3880 / 3949 / 4030
CRI: >80 CRI
Efficiency (%): 0.59
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

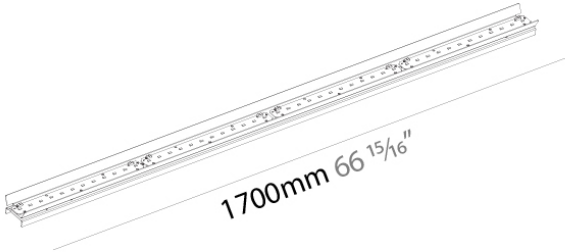

A3ID75-TRI-SYS COMPONENTS

A38161-

DESCRIPTION

Idaho 75 System - Light Insert - 1980mm - 35.7W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
Length (mm): 1980
Length (in): 77 15/16
Width (mm): 60
Width (in): 2 3/8
Height (mm): 50
Height (in): 1 15/16
Light Distribution: Direct
Weight (kg): 2.805
Weight (lbs): 6.18
Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 35
Total Output Wattage (W): 28 / 22.4 (3500K)
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (mA): 350 / 700 (3500K)


LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3310 / 3426 / 3496
Nominal Lumen (lm): 4970 / 5145 / 5250
CRI: >80 CRI
Efficiency (%): 0.59
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

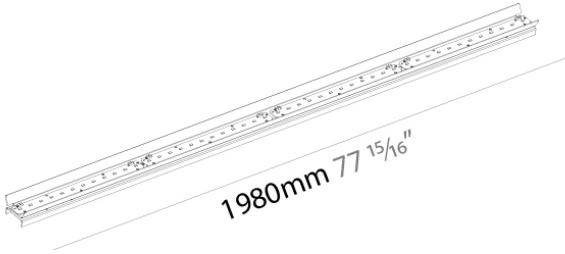

A3ID75-TRI-SYS COMPONENTS

A38163-

DESCRIPTION

Idaho 75 System - Idaline Light Insert - 2270mm / 89 3/8" - 39.2W LED (Zhaga Standard) - 3000K / 3500K / 4000K - CRI:90

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural
Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
Length (mm): 2270
Length (in): 89 3/8
Width (mm): 60
Width (in): 2 3/8
Height (mm): 50
Height (in): 1 15/16
Light Distribution: Direct
Weight (kg): 3.162
Weight (lbs): 6.97
Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 39.2
Total Output Wattage (W): 35.6 / 25.6 (3500K)
Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350 / 800 (3500K)



LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3445 / 3507 / 3579
Nominal Lumen (lm): 5173 / 5266 / 5373
CRI: >90 CRI
Efficiency (%): 0.59
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

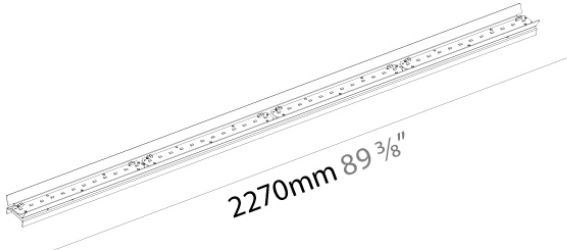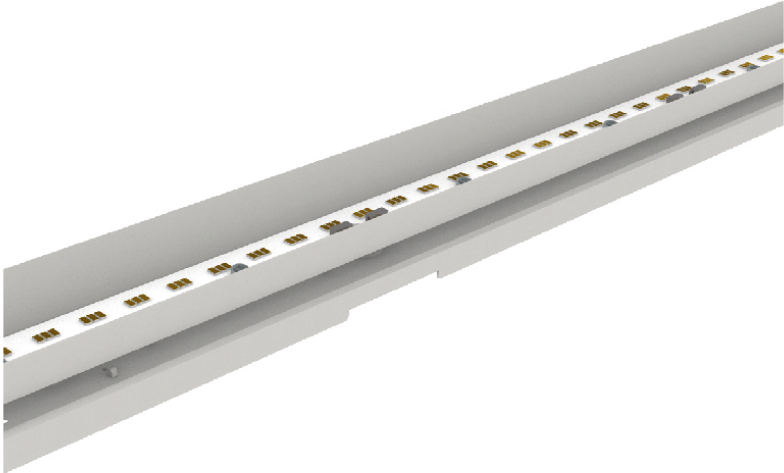

A3ID75-TRI-SYS COMPONENTS

A3963000

DESCRIPTION

Idaho 75 System - Trimless Flat Opal Diffuser per Meter - Max 3000mm / 118 1/8"

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Weight (kg): 0.22
Weight (lbs): 0.48
Diffuser: PMMA - Opal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

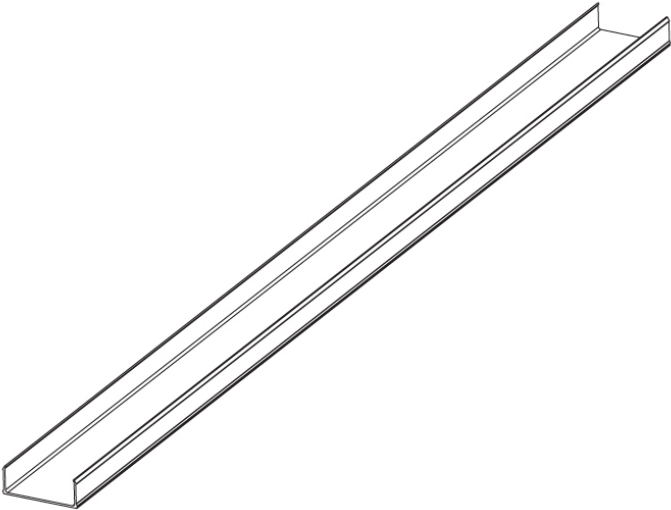

max. 3000mm 118 1/8"



A3ID75-TRI-SYS COMPONENTS

A3963100


DESCRIPTION
Idaho 75 System - Trimless End Cap

GENERAL
Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 83
Length (in): 3 ¼
Width (mm): 1
Width (in): 1/16
Height (mm): 90
Height (in): 3 9/16
Weight (kg): 0.05
Weight (lbs): 0.11
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

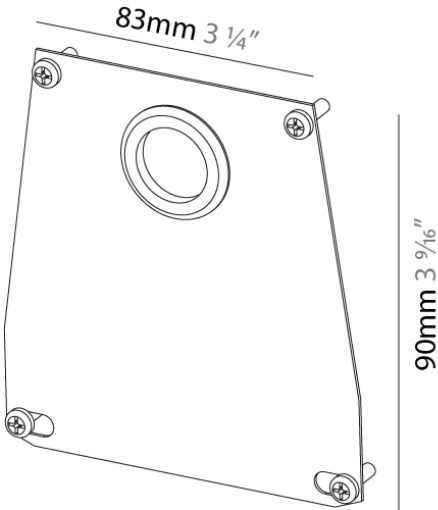

A3ID75-TRI-SYS COMPONENTS

A39632-



DESCRIPTION
Idaho 75 System - Trimless Mounting Bracket

GENERAL
Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 172
Length (in): 3 3/4
Width (mm): 68
Width (in): 2 11/16
Height (mm): 107
Height (in): 4 3/16
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Weight (kg): 0.22
Weight (lbs): 0.48
Installation Requirement: Ceiling Thickness: 10mm / 12.5mm / 15mm
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

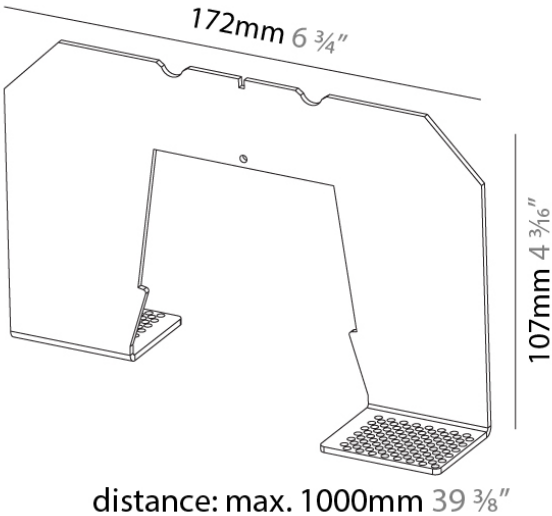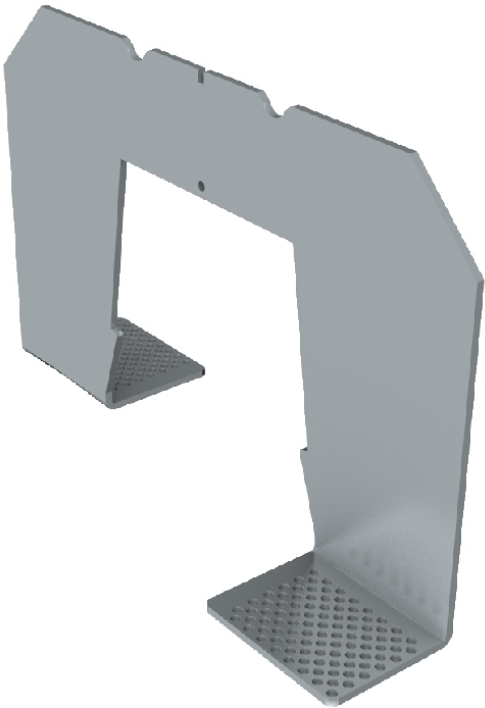

A3ID75-TRI-SYS COMPONENTS

A3963300

DESCRIPTION

Idaho 75 System - Trimless Frame Alignment Kit

GENERAL

Series: Idaho
Subseries: Idaho 75
Brand: Prolicht
Division: Architectural



PHYSICAL

Length (mm): 104
Length (in): 4 1/8
Width (mm): 85
Width (in): 3 3/8
Height (mm): 197
Height (in): 7 3/4
Weight (kg): 0.81
Weight (lbs): 1.79
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

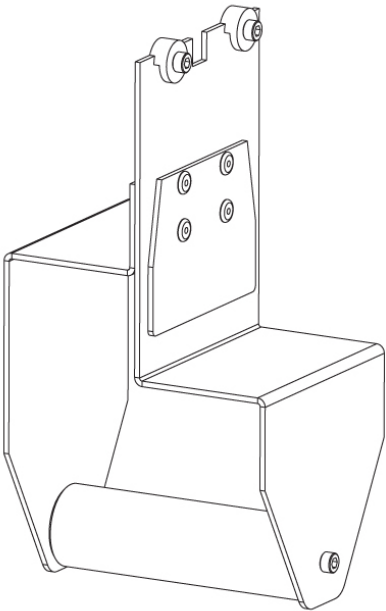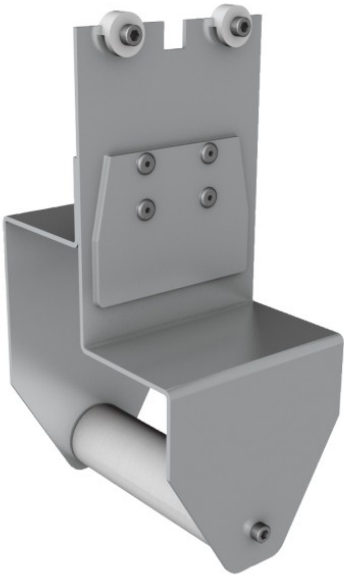

A3ID75-TRI-SYS COMPONENTS

A3963400

DESCRIPTION

Idaho System - Trimless Linear Coupler

GENERAL

Series: Idaho
Brand: Prolicht
Division: Architectural



PHYSICAL

Shape: Rectangle
Length (mm): 80
Length (in): 3 1/8
Width (mm): 4
Width (in): 3/16
Height (mm): 35
Height (in): 1 3/8
Weight (kg): 0.09
Weight (lbs): 0.198
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

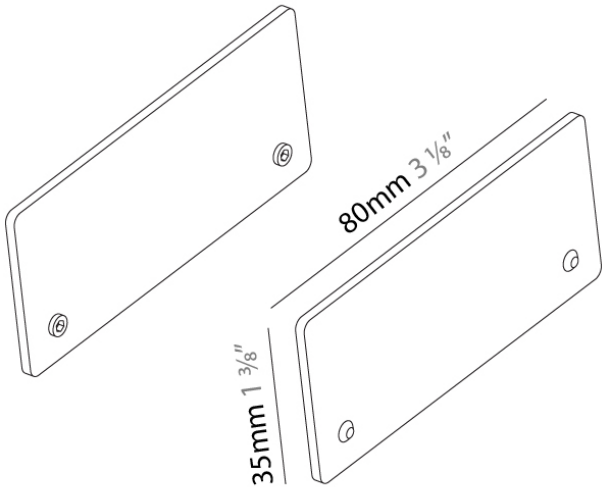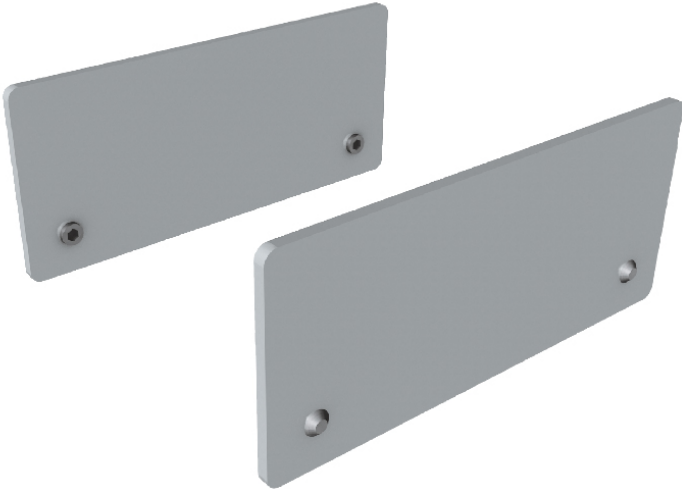

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)