

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D31001-

DESCRIPTION

Acqua - Uplight - Suspension - 110mm / 4 5/16" - 5.6W LED - 2800K - CRI >95 - Canopy required (sold separately)

GENERAL

Series: Acqua
Brand: Cini & Nils
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Curves
Length (mm): 110
Length (in): 4 5/16
Width (mm): 100
Width (in): 3 15/16
Height (mm): 285
Height (in): 11 1/4
Light Distribution: Uplight
Weight (kg): 0.4
Weight (lbs): 0.88
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5.6
Total Output Wattage (W): 4.65
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Number of LEDs: 1
Color Temperature (°K): 2800
Nominal Lumen (lm): 650
CRI: >95 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

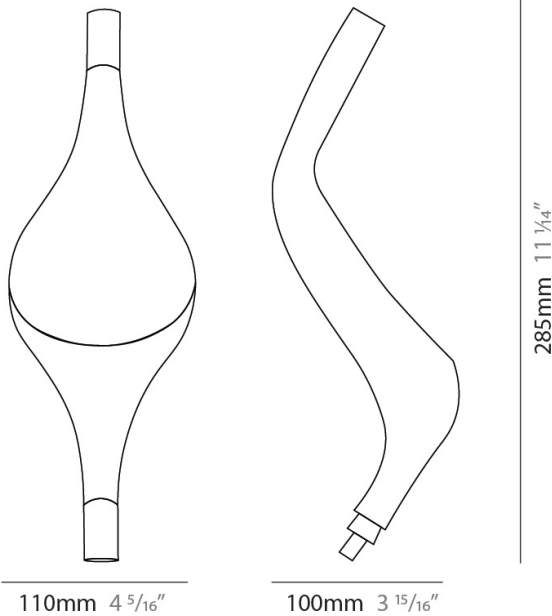

D3ACQUA-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D31003-

DESCRIPTION

Acqua - Downlight - Suspension - 110mm / 4 5/16" - 5.6W LED - 2800K - CRI >95 - Canopy required (sold separately)

GENERAL

Series: Acqua
Brand: Cini & Nils
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Curves
Length (mm): 110
Length (in): 4 5/16
Width (mm): 100
Width (in): 3 15/16
Height (mm): 285
Height (in): 11 1/4
Light Distribution: Downlight
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5.6
Total Output Wattage (W): 4.65
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: No
Driver Location: See canopy components
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Number of LEDs: 1
Color Temperature (°K): 2800
Nominal Lumen (lm): 650
CRI: >95 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

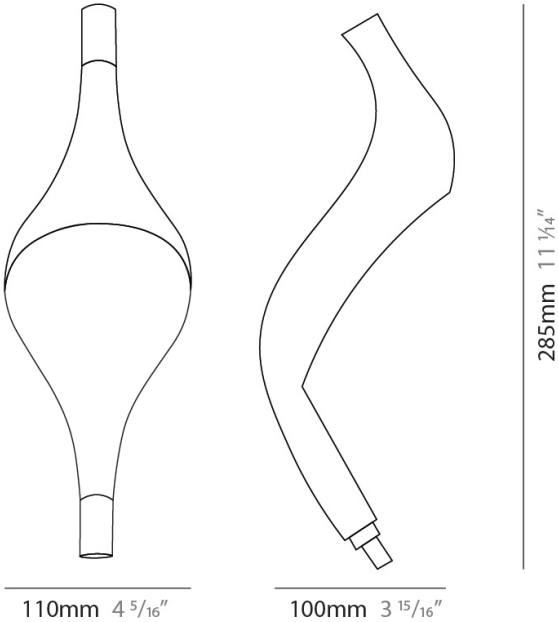

D3ACQUA-MOD-SYS COMPONENTS

D39000-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 1 Cable - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24


LED

Number of LEDs: 1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

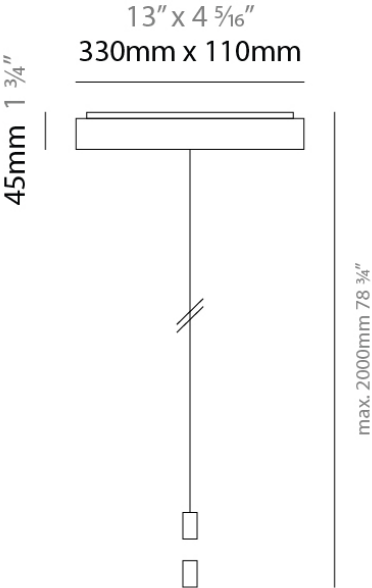

D3ACQUA-MOD-SYS COMPONENTS

D39001-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 2 Cables - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum


ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming 120/277Vac
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: 0-10V Dimming (Remoted Only)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

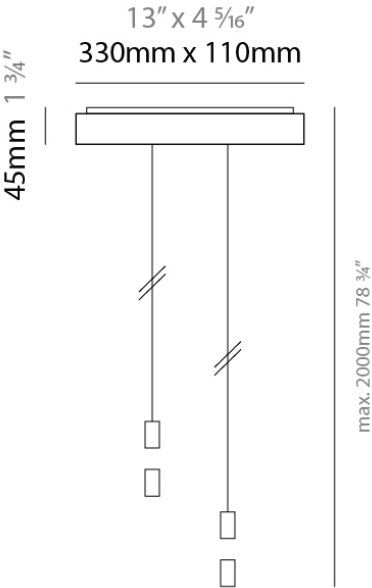

D3ACQUA-MOD-SYS COMPONENTS

D39002-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 3 Cables - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

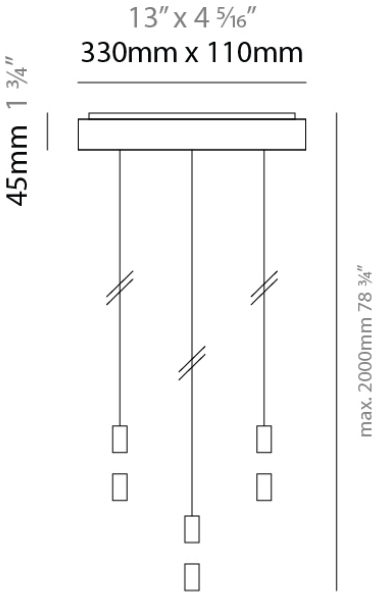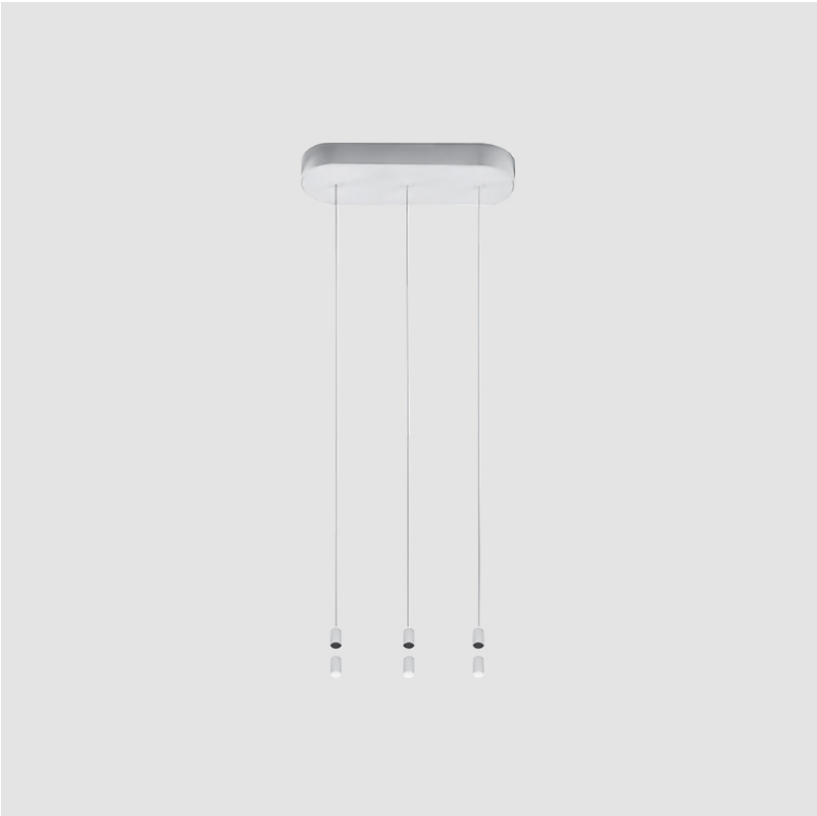

D3ACQUA-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

D39003-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 1 Cable with Swag Mount - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL


Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

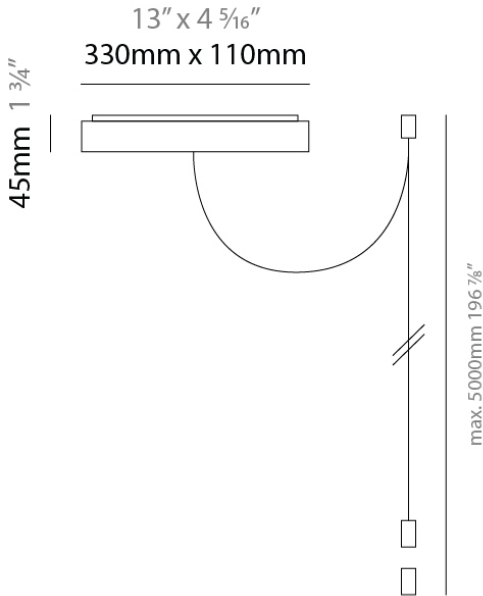

D3ACQUA-MOD-SYS COMPONENTS

D39004-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 2 Cables with Swag Mount - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

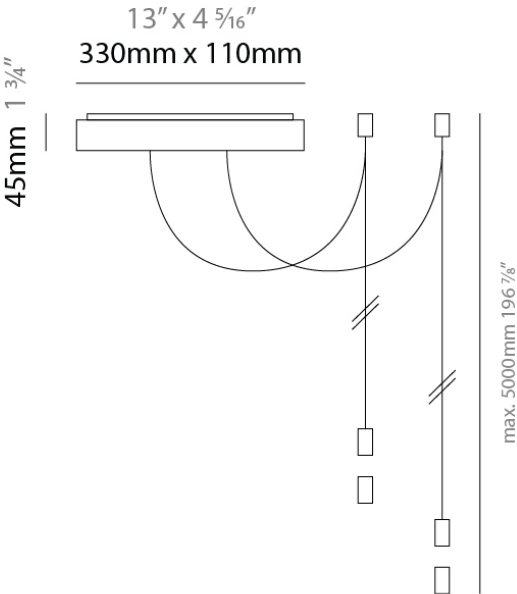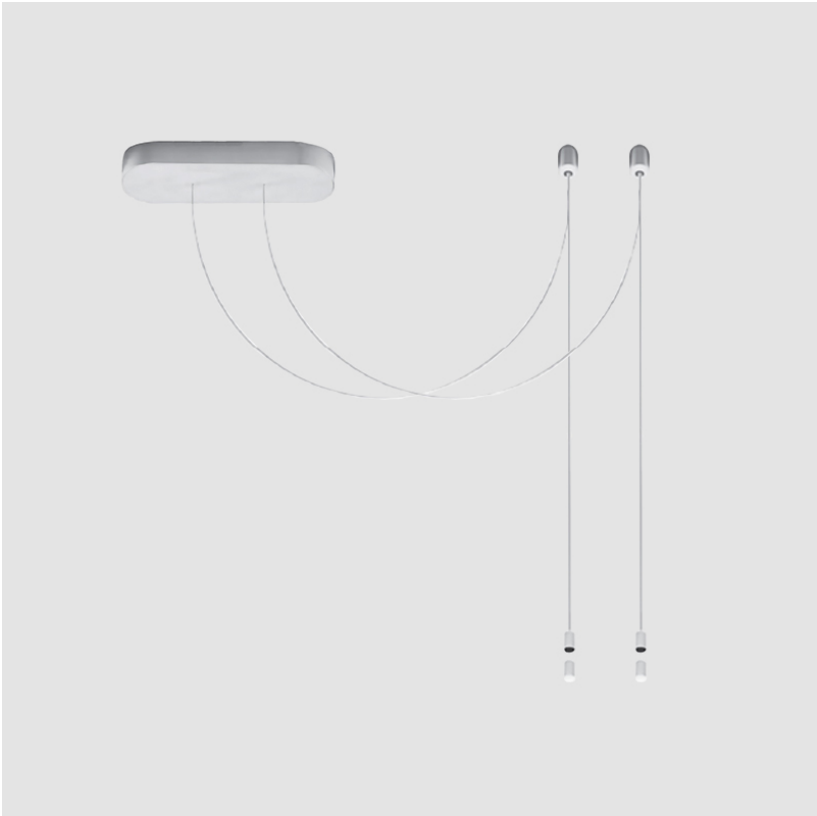

D3ACQUA-MOD-SYS COMPONENTS

D39005-

DESCRIPTION

Acqua - Pendant - Oblong Canopy - 3 Cables with Swag Mount - Includes Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

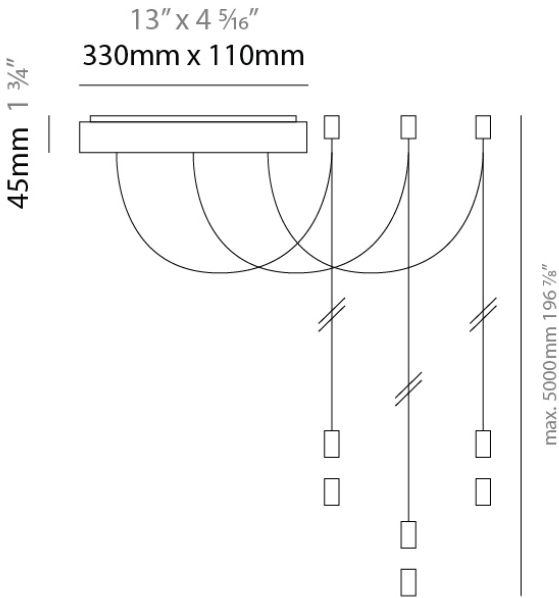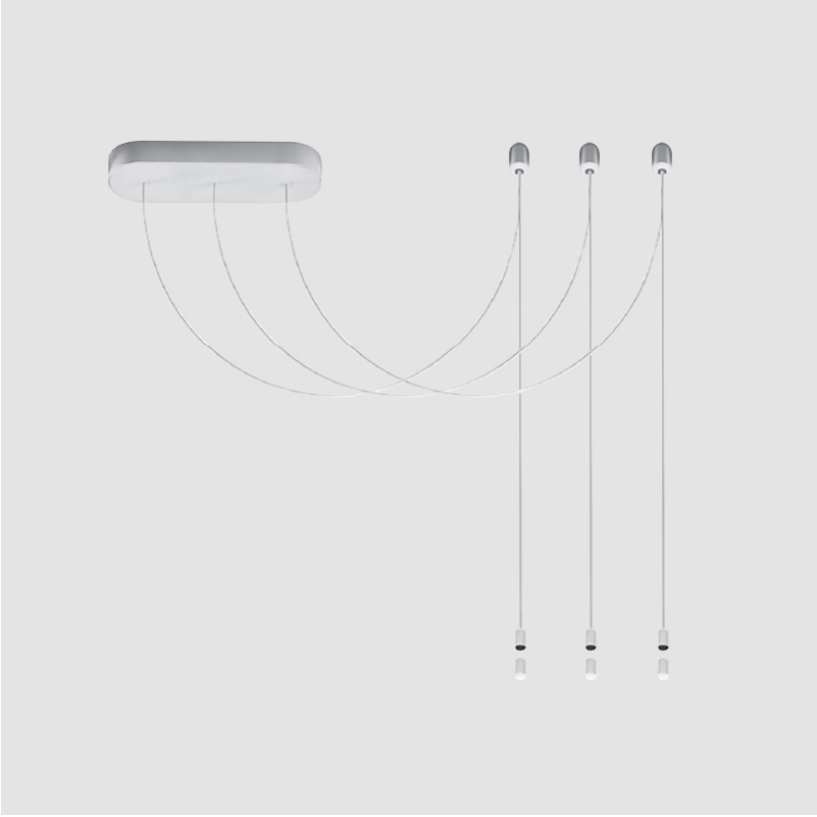

D3ACQUA-MOD-SYS COMPONENTS

D39006-

DESCRIPTION

Pendant Canopy - for Remote Driver

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Oblong
Length (mm): 330
Length (in): 13
Width (mm): 110
Width (in): 4 5/16
Height (mm): 45
Height (in): 1 3/4
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum


ELECTRICAL

Lamp Type: LED
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

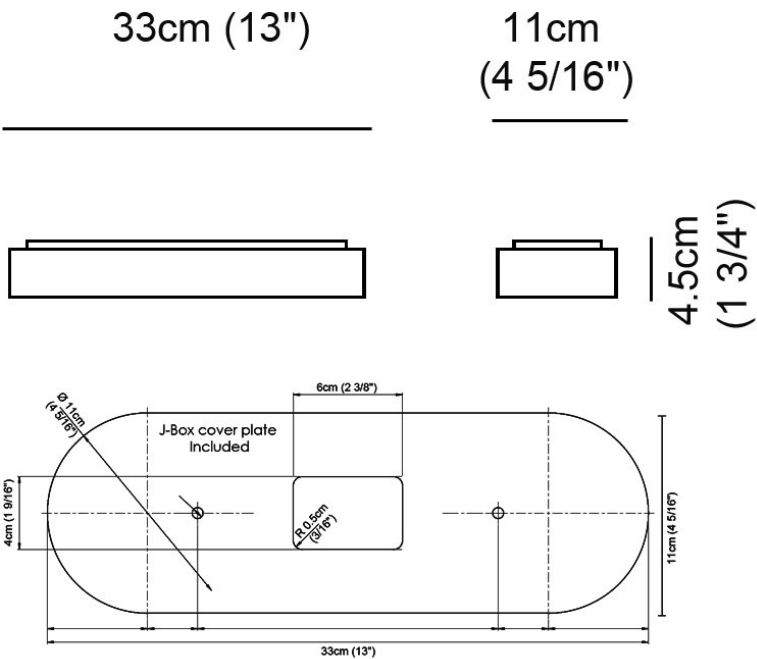

D

D3ACQUA-MOD-SYS COMPONENTS

D39007

DESCRIPTION

Cable Guide - White

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Subcategory: Modular


PHYSICAL

Shape: Cylinder
Diameter (mm): 20
Diameter (in): 13/16
Height (mm): 36
Height (in): 1 7/16
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

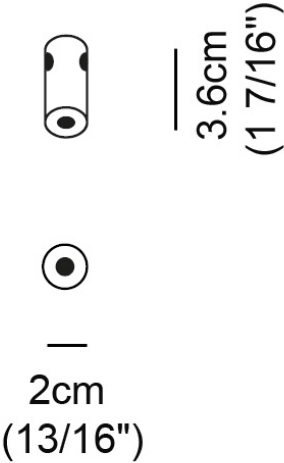

D3ACQUA-MOD-SYS COMPONENTS

D39020

DESCRIPTION

Recessed Ceiling Mount and Plate - White

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Subcategory: Modular


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



4 5⁄16" x 4 5⁄16"
110mm x 110mm

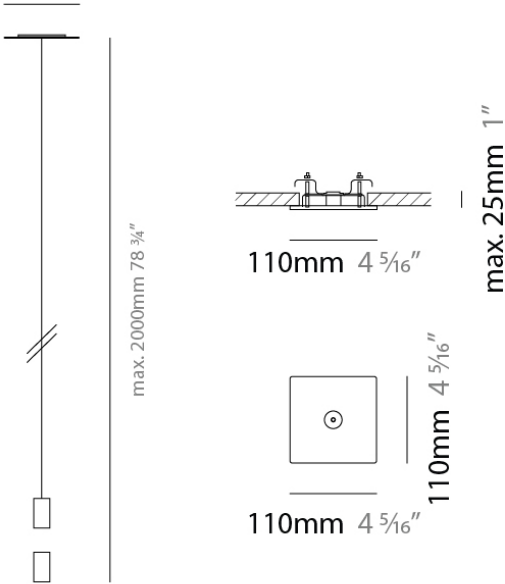

D3ACQUA-MOD-SYS COMPONENTS

D39023-

DESCRIPTION

Acqua Filo - Portable - Suspension - Cable with Counter Weight, Switch and Plug - Max 3x 5.6W LED - 1-3 fixture bodies (Uplight and / or Downlight)

GENERAL

Series: Acqua
Subseries: Acqua
Brand: Cini & Nils
Division: Design
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Diameter (mm): 30
Diameter (in): 3 1/8
Length (in): 3
Height (mm): 210
Height (in): 8 1/4
Max. Overall Height (mm): 2210
Max. Overall Height (in): 87
Fixture Finish: WHI / MGD / MSI
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 5.6-16.8
Total Output Wattage (W): 4.65-13.95
Dimming: Non-Dimmable
Driver Location: Inline Transformer Plug
Input Voltage (V): 120


LED

Number of LEDs: 1-3
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

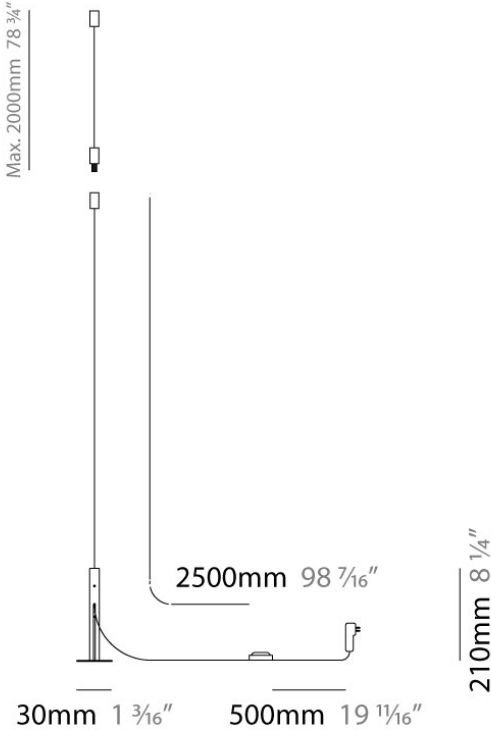

PROJECT
TYPE
NOTES
QUANTITY
DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)